


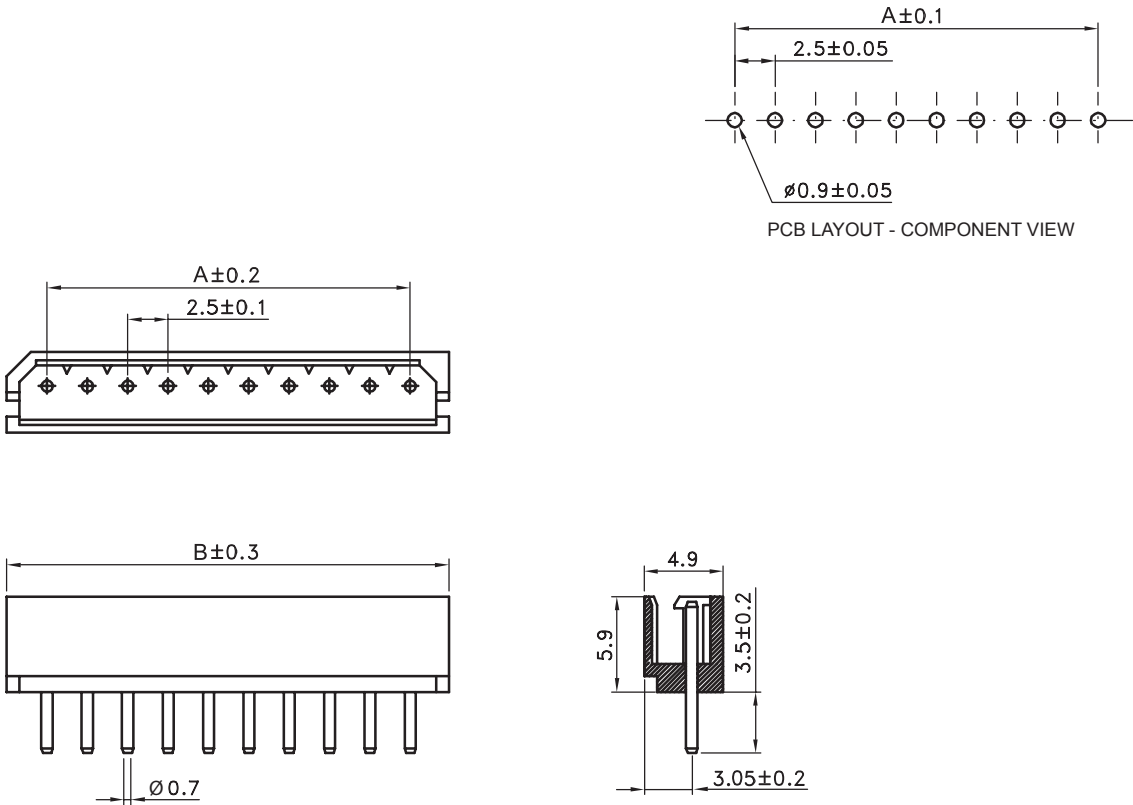

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: NYLON 46
FLAMABILITY RATING: UL94-V0
COLOR: BEIGE
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: TIN
QUALITY CLASS: 25 MATING CYCLES
PITCH: 2.50MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 85°C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 3A
WORKING VOLTAGE: 250V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/MN
CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
CERTIFIED: E323964

SOLDERING
SOLDER TEMP.: JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
BAG

DIMENSION
A = 2.50 x (NB PIN - 1)
B = 2.50 x (NB PIN) + 2.5

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.25 .XX = +/- 0.15			DESCRIPTION: 2.50 MM MALE SHROUDED HEADER	SIZE A4
				APPROVAL: RJ	UNIT: MM	WERI PART NO: 6460xx11622			
I	10-SEP-13	TOL REVIEW	QL		SCALE:				
H	06-AUG-13	CHARACTERISTIC	QL		SHEET: 1/1				
REV	DATE	FILE	BY		DRAW: PEARL				