


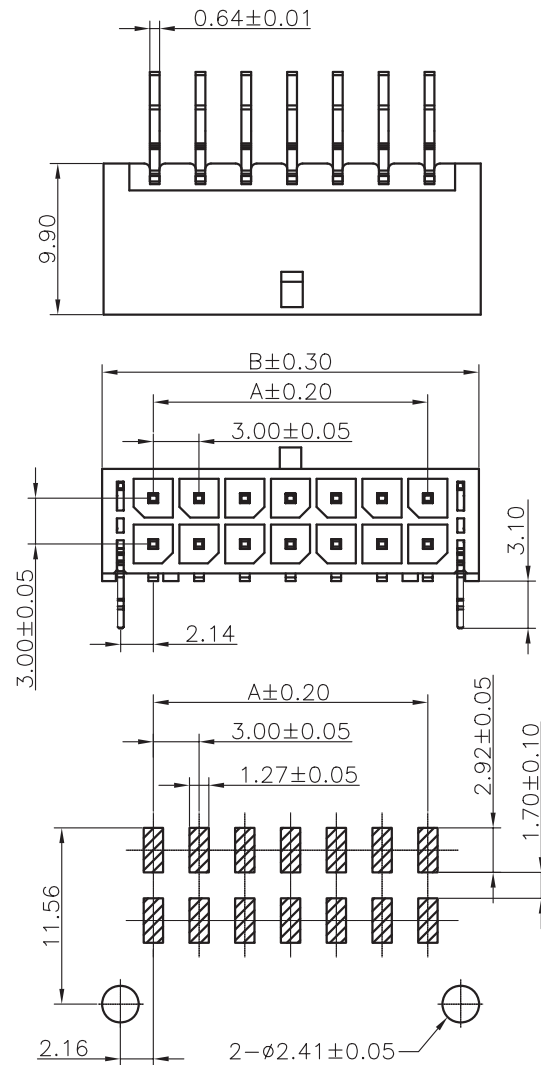

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: LCP
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: TIN
QUALITY CLASS: 25 MATING CYCLES
PITCH: 3.00MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 5A
WORKING VOLTAGE: 250V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1500V AC/MN
CONTACT RESISTANCE: 10 mOHM MAX

STANDARD
CERTIFIED: E323964

SOLDERING
JEDEC LEAD FREE REFLOW

PACKAGING
TUBE

DIMENSION
A = 3.00 x (NB. PIN / 2 - 1)
B = 3.00 x (NB. PIN / 2 + 1) + 0.70

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15	 WÜRTH ELEKTRONIK		
G	20-AUG-14	PACKAGING	AS					
F	29-JUL-13	DWG & CARAC	QL					
E	06-JUL-12	PLASTIC	GG					
D	18-NOV-09	STANDARD	JP					
C	27-JUL-09	REAR PIN	JP	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 3.00MM MALE DUAL ROW SMT RIGHT ANGLE HEADER WITH THROUGH HOLE RETENTION METAL CLIP		SIZE A4
B	23-AVR-09	PACKAGING	JC		SCALE:			
A	04-OCT-04	PDF DRAW			SHEET: 1/2			
REV	DATE	FILE	BY		DRAW: JACK	WERI PART NO: 662 0xx 230 822		

