



1

2

3

4

5

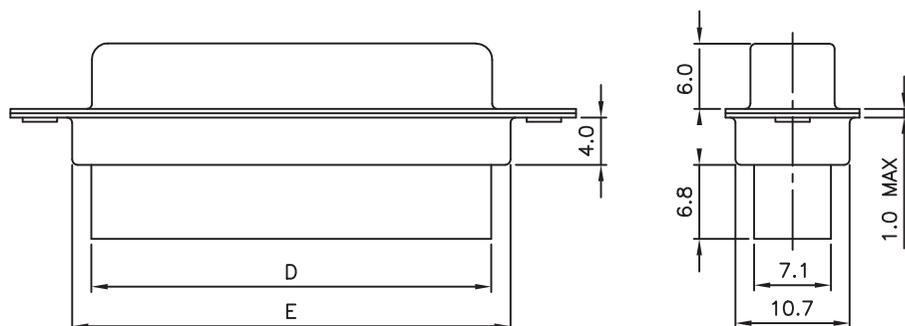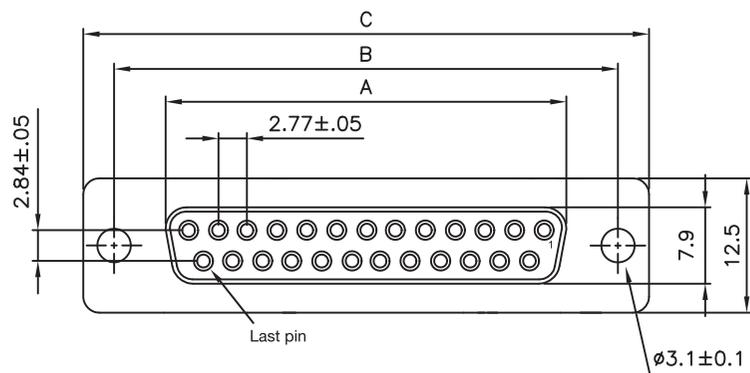

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PBT
 FLAMABILITY RATING: UL94-V0
 MAX. TEMPERATURE: 220°C 10s
 COLOR: BLACK
 SHIELDING: STEEL TIN PLATED

ENVIRONMENTAL
 OPERATING TEMP.: -40°C UP TO 85°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 3A MAX
 WORKING VOLTAGE: 125V AC
 INSULATOR RESISTANCE: >5000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/MN

PACKAGING
 TRAY

DIMENSION


NB PIN	A	B	C	D	E
9	16.30	25.00	30.80	15.80	19.20
15	24.60	33.30	39.20	24.00	27.70
25	38.30	47.10	53.10	38.00	41.10
37	54.80	63.50	69.40	54.30	57.30

FEMALE CRIMP CONTACT
 AWG 20-22 PART NO: 61800213722
 AWG 24-26 PART NO: 61800313722

NOTE : NOT COMPATIBLE WITH HOOD 6180xx25311

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

DESCRIPTION: D SUB FEMALE TERMINAL HOUSING

SIZE

I

05-MAR-13

NOTE

QL

SCALE:

WERI PART NO: 618 0xx 217 222

A4

H

22-AUG-12

UL

GG

DRAW: PEARL

REV

DATE

FILE

BY