


TECHNICAL CHARACTERISTICS

COVER MATERIAL: ZINC ALLOY
 COVER FINISHED: ZINCPLATED
 COLOUR: METAL
 COMPRESSION INSERT MATERIAL: THERMOPLASTIC
 CABLE DIAMETER: 5.3 TO 16.5MM
 SCREWS: UNC 4-40

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 TO 125°C
 ATTENUATION BETTER THAN 40 dB OVER RANGE
 30 MHz TO 1 GHz

DIMENSION

TYP	A	B	C	CABLE DIAMETER
09	31.12	37.21	15.75	5.3 - 8 MM
15	39.11	40.64	15.75	5.3 - 8 MM
25	53.08	39.37	15.52	6.0 - 11.4 MM
37	69.34	45.72	21.94	9.0 - 16.5 MM

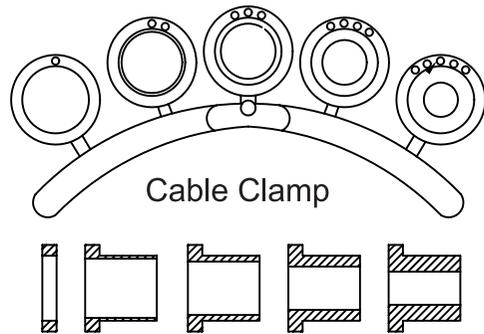

RoHS Compliant			
G			
F			
E			
D			
C			
B	30-OCT-07	PAGE 2	CH
A	07-NOV-06	PDF	JPP
REV	DATE	FILE	BY



GENERAL TOLERANCE
 .X = +/- 0.2
 .XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

DESCRIPTION: D SUB METAL HOOD TOP ENTRY 4-40 SCREW
 EMI/RFI SHIELDING

SIZE

SCALE:

WERI PART NO: 4180 xx 27911

A4

SHEET: 1/2

DRAW: PEARL


1

2

3

4

5

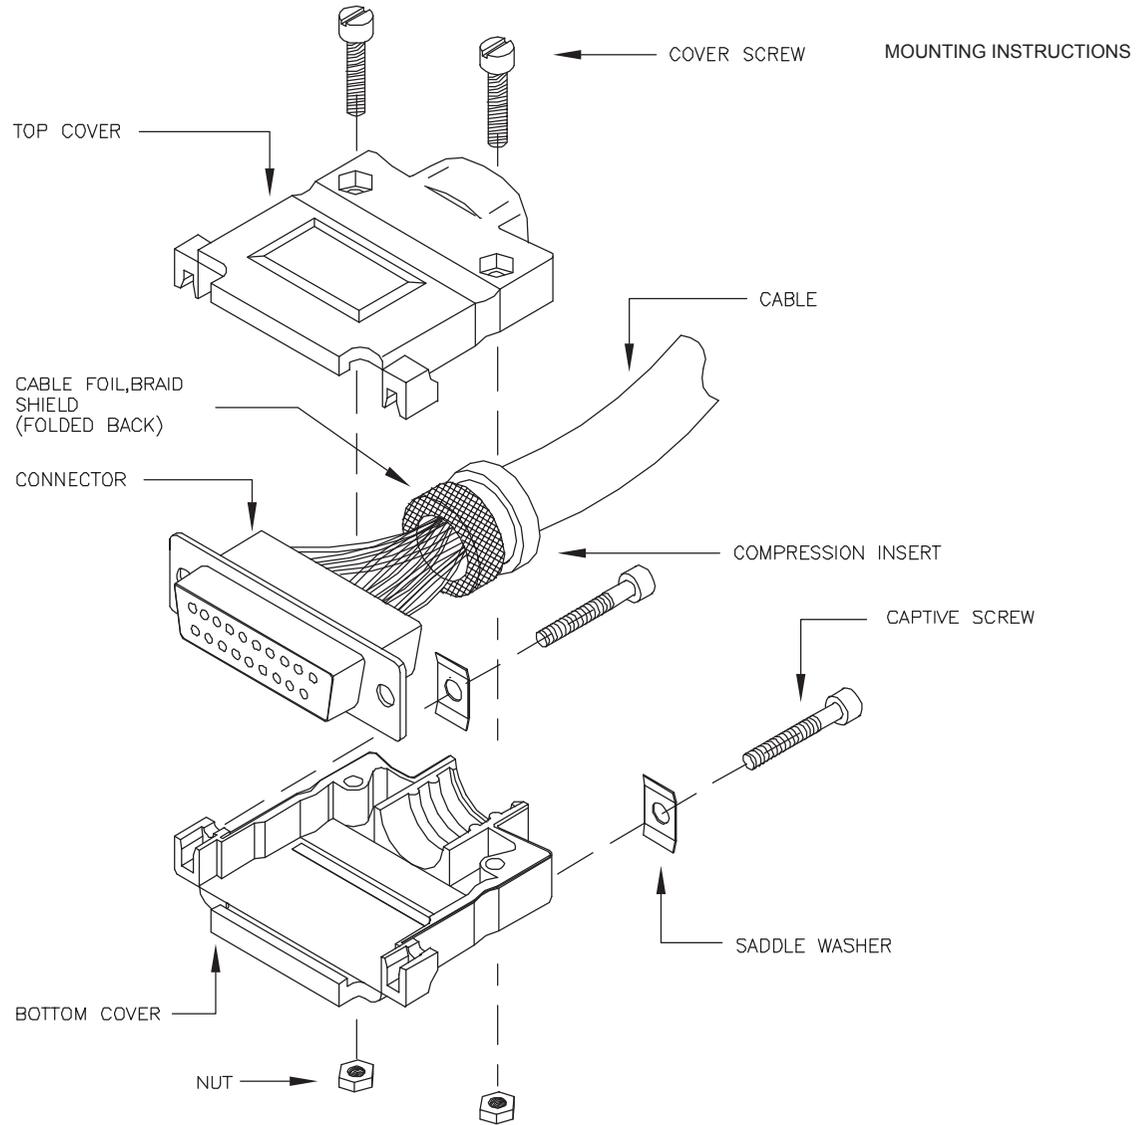

RoHS Compliant			
G			
F			
E			
D			
C			
B	30-OCT-07	PAGE 2	CH
A	07-NOV-06	PDF	JPP
REV	DATE	FILE	BY



GENERAL TOLERANCE
 .X = +/- 0.2
 .XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

DESCRIPTION: D SUB METAL HOOD TOP ENTRY 4-40 SCREW
 EMI/RFI SHIELDING

SIZE

SCALE:

WERI PART NO: 4180 xx 27911

A4

SHEET: 2/2

DRAW: PEARL