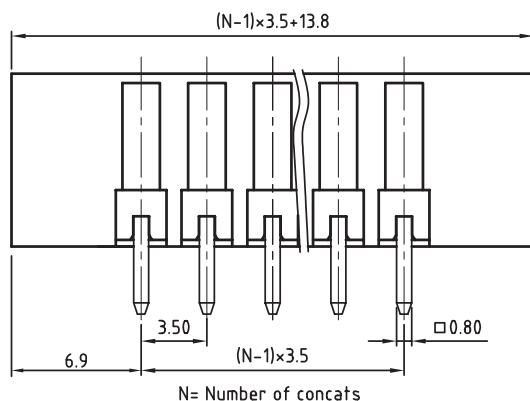
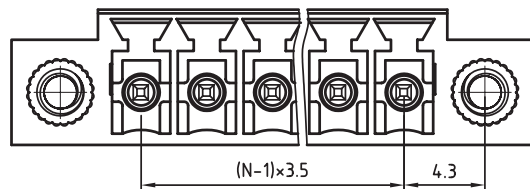


TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PA 66
 FLAMABILITY RATING: UL94-V0
 COLOR: GREEN
 CONTACT: BRASS
 SOLDER TAIL PLATING: TIN
 FLANGES SCREW NUT: BRASS M2.5

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	cULus	VDE
CURRENT RATING:	10A	10.5A
WORKING VOLTAGE:	300VAC	300VAC
WITHSTANDING VOLTAGE:	1.6KV	2.5KV
CONTACT RESISTANCE:	20 mOhm max	

MECHANICAL
 PITCH: 3.5MM

SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 3231

CERTIFICATION



RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15		DESCRIPTION: SERIE 3231 - 3.50MM VERTICAL PCB HEADER WITH FLANGES WR-TBL WERI PART NO: 691 323 100 0xx	SIZE A4	
G									
F									
E									
D									
C				APPROVAL: RJ	UNIT: MM				
B	24-JAN-14	LAYOUT DIM	QL		SCALE:				
A	31-OCT-08	PDF	JP		SHEET: 1/1				
REV	DATE	FILE	BY		DRAW: MARVIN				