


1

2

3

4

5

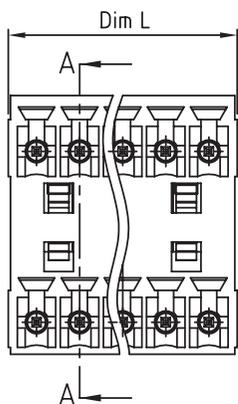

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	8.81	12.62	16.43	20.24	24.05	27.86	31.67	35.48	39.29	43.10	46.91	50.72
Dim B	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.10	41.91	45.72
TOL	±0.15			±0.20				±0.25				
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	54.53	58.34	62.15	65.96	69.77	73.58	77.39	81.20	85.01	88.82	92.63	
Dim B	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.20	80.01	83.82	87.63	
TOL	±0.30				±0.35							

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PA 66
 FLAMABILITY RATING: UL94-V0
 COLOR: GREEN
 CONTACT PIN: BRASS (CuZn)
 SURFACE OF SOLDER TAIL PLATING: TIN

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: □UL □10A
 WORKING VOLTAGE: □300VAC
 WITHSTANDING VOLTAGE: □1.6KV
 CONTACT RESISTANCE: 20 mOhm MAX




STANDARD
 IEC CERTIFIED E315414 / MODEL NUMBER 3293

MECHANICAL
 PITCH: 3.81mm

SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 3293

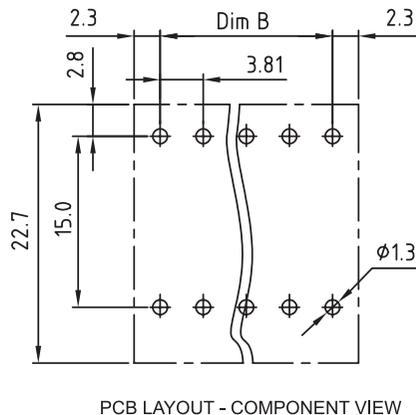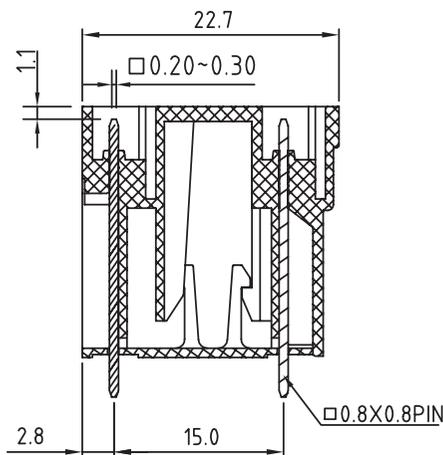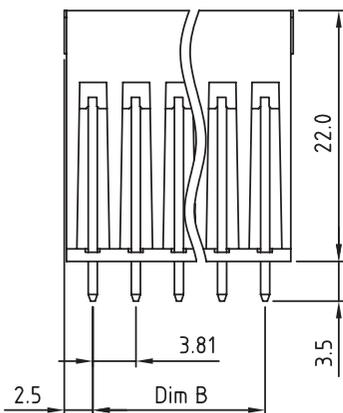

RoHS Compliant			
G			
F			
E			
D			
C			
B			
A	14-JUN-10	PDF	JP
REV	DATE	FILE	BY



GENERAL TOLERANCE
 .X = +/- 0.2
 .XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

DESCRIPTION: SERIE 3293 - 3.81MM DOUBLE LEVEL VERTICAL MALE PCB HEADER WITH FLANGES TYPE WR-TBL

SIZE

SCALE:

WERI PART NO: 691 329 300 0xx

A4

SHEET: 1/1

DRAW: MARVIN