



N=Number of contacts

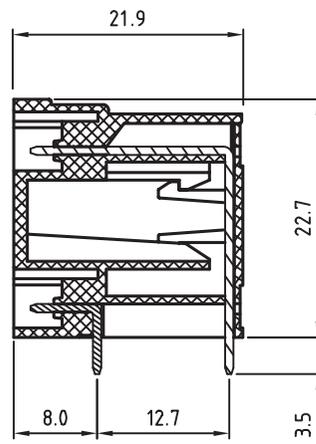

SECTION A-A

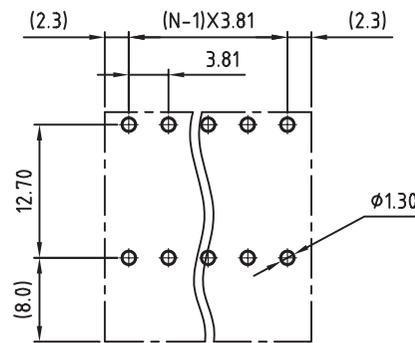

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL  
 INSULATOR: PA66  
 FLAMABILITY RATING: UL94-V0  
 COLOR: GREEN  
 CONTACT PIN: BRASS (CuZn)  
 SOLDER TAIL PLATING: TIN

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -40 UP TO 105°C  
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
 CURRENT RATING: 10A  
 WORKING VOLTAGE: 300VAC  
 WITHSTANDING VOLTAGE: 1.6KV  
 CONTACT RESISTANCE: 20 mOhm MAX

MECHANICAL  
 PITCH: 3.81MM


SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 3273

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/- 0.2  
 .XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW: MARVIN

DESCRIPTION: SERIE 3273 - 3.81MM DUAL HORIZONTAL PCB HEADER  
 WR-TBL

WERI PART NO: 691 327 310 0 xx

SIZE

**A4**

G			
F			
E			
D			
C			
B	17-MAR-09	DEPTH	JP
A	20-FEB-09	PDF	JP
REV	DATE	FILE	BY