


1

2

3

4

5

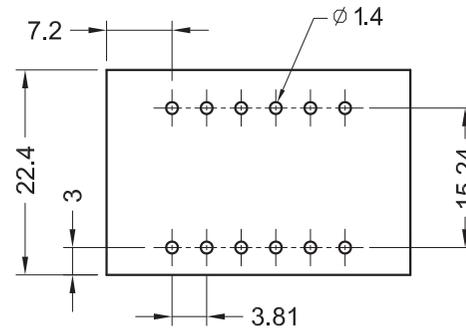

RECOMMENDED PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA 66
 FLAMABILITY RATING: UL94-V0
 COLOR: GREEN
 CONTACT MATERIAL: BRASS (CuZn)
 PLATING: TIN PLATED

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING: 10A
 WORKING VOLTAGE: 300VAC
 WITHSTANDING VOLTAGE: 2000 V AC/MN
 INSULATION RESISTANCE: >2000M OHM
 CONTACT RESISTANCE: 20 mOhm MAX

UL

STANDARD

 CERTIFIED E315414 / MODEL NUMBER 357B

SCREW: M2.5

PITCH: 3.81mm




SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 357

DIMENSIONS

PINS	A
4	18.21
6	22.02
8	25.83
10	29.64
12	33.45
14	37.26
16	41.07

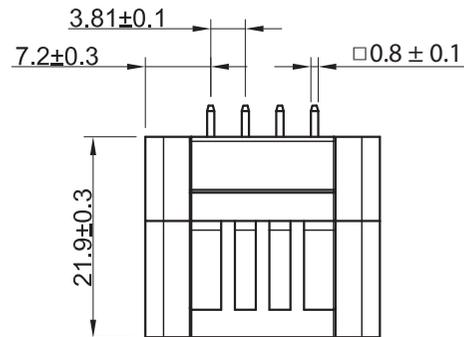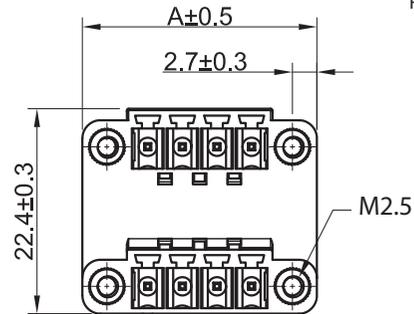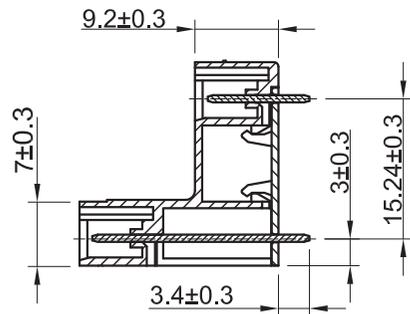

RoHS Compliant

G

F

E

D

C 29-JUL-13

DWG REVIEW

QL

B 15-MAY-13

UL

JC

A 30-JAN-13

PDF


QL

REV DATE

FILE

BY

PROJECTION:



APPROVAL: RJ

GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15



UNIT: MM

SCALE:

SHEET: 1/1

DRAW: QL

DESCRIPTION: SERIE 357 - 3.81MM DOUBLE LEVEL VERTICAL MALE
 PCB HEADER WITH FLANGES TYPE WR - TBL

WERI PART NO: 691 357 300 0xxB

SIZE

A4