


1

2

3

4

5

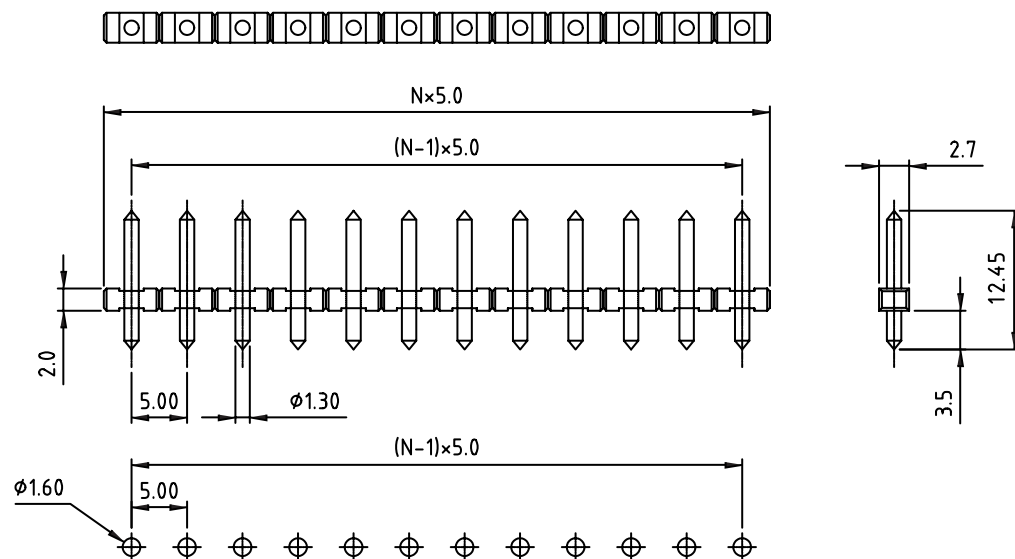

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA 66

FLAMABILITY RATING: UL94-V0

COLOR: BLACK

SOLID PIN: BRASS (CuZn)

SOLDER TAIL PLATING: TIN

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 105°C

COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING: 15A

WORKING VOLTAGE: 300VAC

WITHSTANDING VOLTAGE: 1.6KV

VDE

12A

300VAC

2.5KV

STANDARD

UL CERTIFIED E315414 / MODEL NUMBER 300

UL CERTIFIED 40024437 / MODEL NUMBER 300

MECHANICAL

PITCH: 5.0MM


SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 300

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2 .XX = ± 0.15 

APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW: MARVIN

DESCRIPTION: SERIE 300 - 5.0MM PIN HEADER WR-TBL

WERI PART NO: 691 300 700 0xx

SIZE

A4