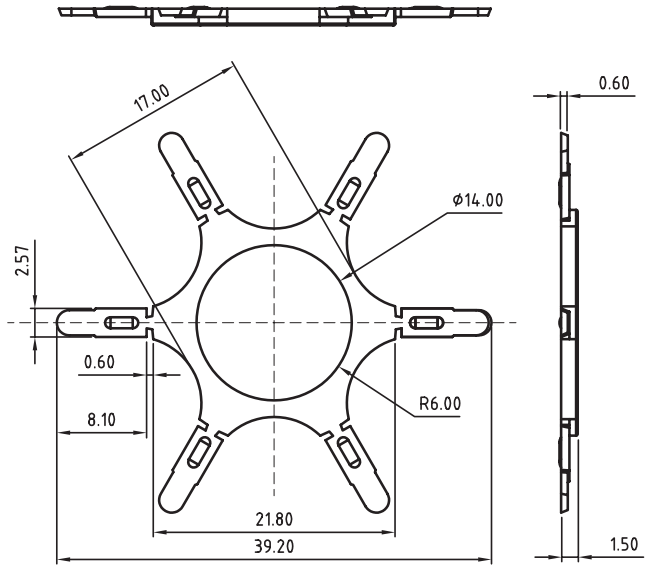

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMABILITY RATING: UL94-V0
COLOR: RED

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

MECHANICAL
APPLICABLE PITCH: 3.50 / 3.81MM

PACKAGING: BOX

INSTRUCTION FOR USE

By using a coding key you avoid any risk of mis-pluging

For this you must add/break one part of the 691 399 900 003 in the PCB connector.
To cut the plug's nose on the corresponding pin n° makes the connection possible (see photo A)
Without cutting the plug's nose on the corresponding pin n° the connection becomes impossible (see photo B)
Please use recomanded cut plier 600 691 000 001 for an razor cutting

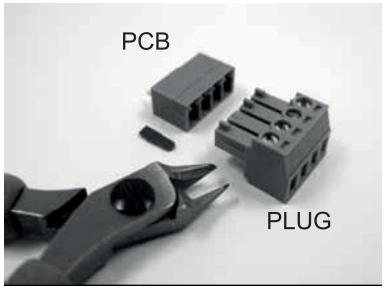

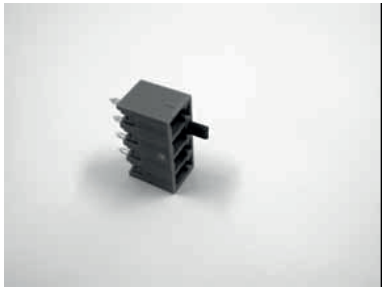

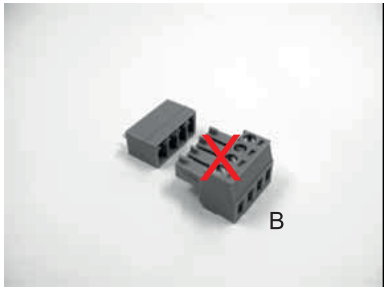

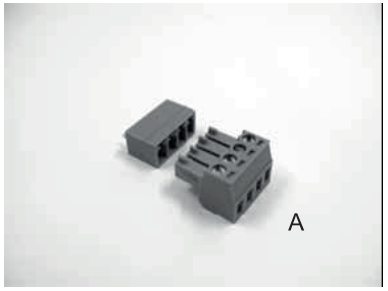

RoHS Compliant			
G			
F			
E			
D			
C			
B	18-JUL-13	CODING	QL
A	05-NOV-08	PDF	JP
REV	DATE	FILE	BY

PROJECTION:

APPROVAL: RJ

GENERAL TOLERANCE
.X = +/_ 0.2
.XX = +/_ 0.15

UNIT: MM
SCALE:
SHEET: 1/1
DRAW: MARVIN

WÜRTH ELEKTRONIK

DESCRIPTION: CODING KEY FOR 3.50 & 3.81MM PITCH SERIES WR-TBL

WERI PART NO: 691 399 900 003

SIZE
A4