



1

2

3

4

5

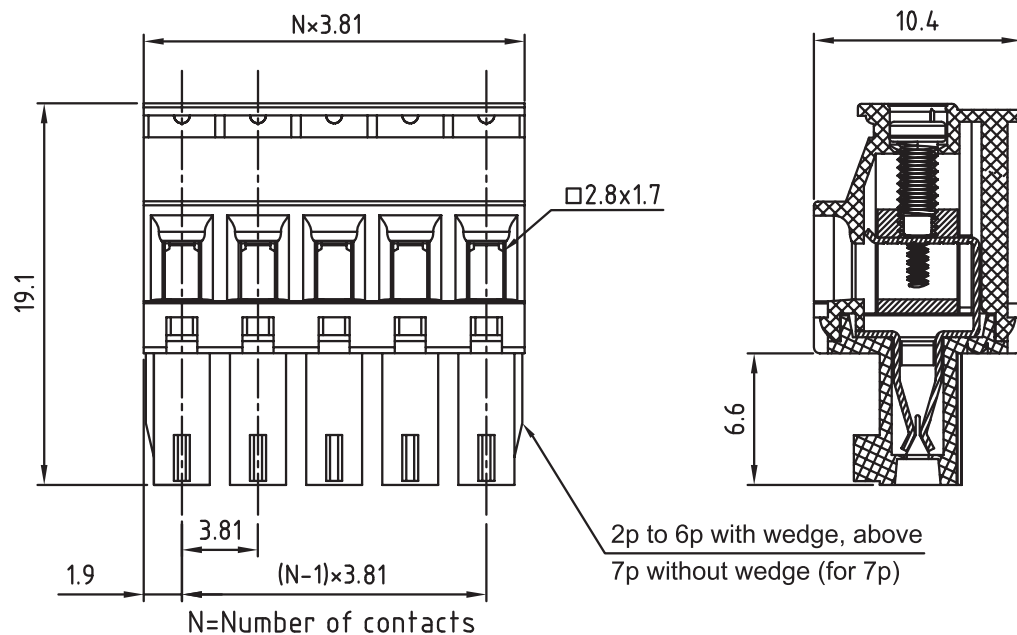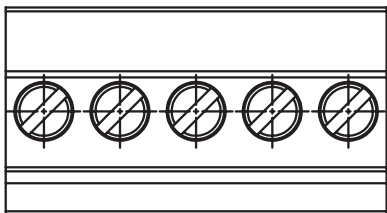

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMABILITY RATING: UL94-V0
COLOR: GREEN
METAL HOUSING: BRASS (CuZn)
TERMINAL SCREW: STEEL ZINC PLATING
TERMINAL SCREW SLOT TYPE: "-"
WIRE GUARD: PhBz TIN PLATED

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	cULus	VDE
CURRENT RATING:	8A	10.5A
WORKING VOLTAGE:	300VAC	300VAC
WITHSTANDING VOLTAGE:	1.6KV	2.5KV
CONTACT RESISTANCE:	□	20 mOhm max

MECHANICAL	
SOLID WIRE:	28-16 AWG / 0.08-1.5MM ²
STRANDED WIRE:	28-16 AWG / 0.08-1.5MM ²
TORQUE: □ □	1.7Lb-In / 0.2Nm

WIRE STRIPE LENGTH: 6-7MM
SCREW: M2.0
PITCH: 3.81MM

PACKAGING: BOX


SERIE 3633

CERTIFICATION



RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2 .XX = ± 0.15 

APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW: MARVIN

DESCRIPTION: SERIE 3633 - 3.81MM HORIZONTAL CABLE ENTRY PLUG
WITH HOOK ON WIRE SIDE - 1.5MM² WIRES WR-TBL

WERI PART NO: 691 363 310 0xx

SIZE

A4

REV	DATE	FILE	BY
A	31-OCT-08	PDF	JP