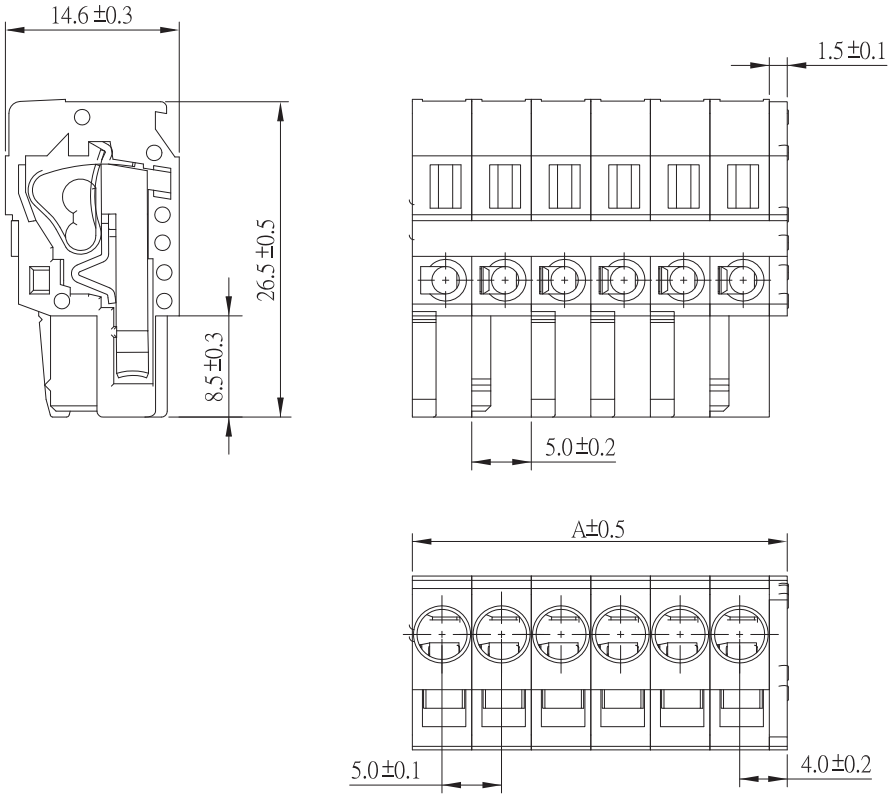

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMABILITY RATING: UL94-V0
COLOR: GREY
CONTACT MATERIAL: PHOSPHOR BRONZE - TIN PLATED
WIRE GUARD: STAINLESS STRIP STEEL

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 115°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	cULus
CURRENT RATING:	16A
WORKING VOLTAGE:	300VAC
WITHSTANDING VOLTAGE:	2.0KV
CONTACT RESISTANCE:	2000 MOhm

MECHANICAL
SOLID WIRE: 28-12 AWG / 0.08-3.31MM²
STRANDED WIRE: 28-12 AWG / 0.08-3.31MM²

WIRE STRIPE LENGTH: 8-9MM
PITCH: 5.0MM

PACKAGING: BOX

SERIE 369B

CERTIFICATION

c us

DIM A = 5 x (NB POLES - 1) + 6.5

RoHS Compliant

REV	DATE	FILE	BY
G			
F			
E			
D			
C			
B			
A	03-JUN-13	PDF	QL

PROJECTION:

APPROVAL: RJ

GENERAL TOLERANCE
.X = +/- 0.2
.XX = +/- 0.15

UNIT: MM
SCALE:
SHEET: 1/1
DRAW: QL

WÜRTH ELEKTRONIK

DESCRIPTION: SERIE 369B – 5,00MM SCREWLESS CABLE ENTRY PLUG 3.3MM² WIRES WR-TBL

WERI PART NO: 691 369 700 0xxB

SIZE **A4**