






1

2

3

4

5

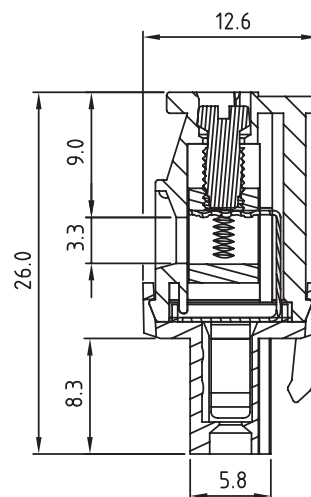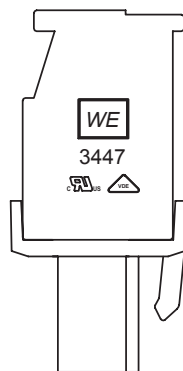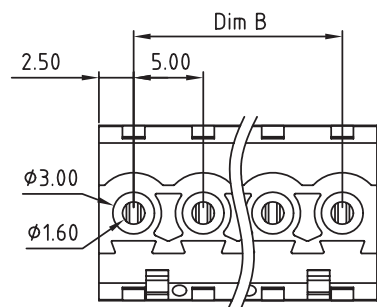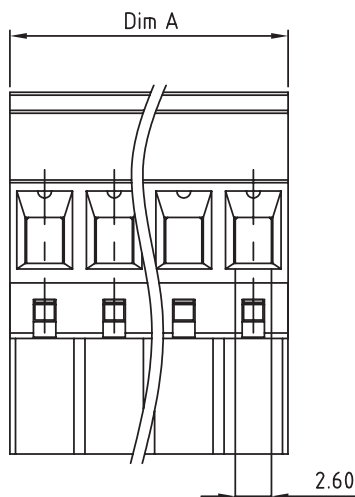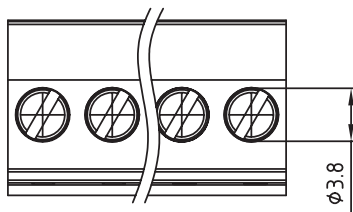

N = Number of poles

Dim A = N x 5.0

Dim B = (N - 1) x 5.0

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.25	±0.25
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA 66

FLAMABILITY RATING: UL94-V0

COLOR: GREEN

METAL HOUSING: BRASS (CuZn)

TERMINAL SCREW: STEEL ZINC PLATING

TERMINAL SCREW SLOT TYPE: "-"

WIRE GUARD: PhBz TIN PLATED

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 105°C

COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING: 15A 17A

WORKING VOLTAGE: 300VAC

WITHSTANDING VOLTAGE: 1.6KV 1.6KV

CONTACT RESISTANCE: 20 mOhm max

STANDARD

ULus CERTIFIED E315414 / MODEL NUMBER 3447

CE CERTIFIED 40023402 / MODEL NUMBER 3447

MECHANICAL

SOLID WIRE: 24-12 AWG / 0.3-2.5MM²

STRANDED WIRE: 24-12 AWG / 0.3-2.5MM²

TORQUE: 3.5Lb-In / 0.50Nm

WIRE STRIPE LENGTH: 6-7MM

SCREW: M3.0


PITCH: 5.00MM

PACKAGING: BOX

SERIE 3447

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/_ 0.2

.XX = +/_ 0.15



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW: JACKIE

DESCRIPTION: SERIE 3447 - 5.00MM HORIZONTAL CABLE ENTRY PLUG
WITH HOOK ON BACK SIDE - 2.5MM² WIRES WR-TBL

WERI PART NO: 691 344 710 0xx

SIZE

A4

REV	DATE	FILE	BY
A	17-NOV-09	PDF	JP