
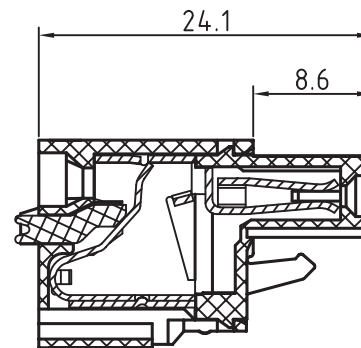


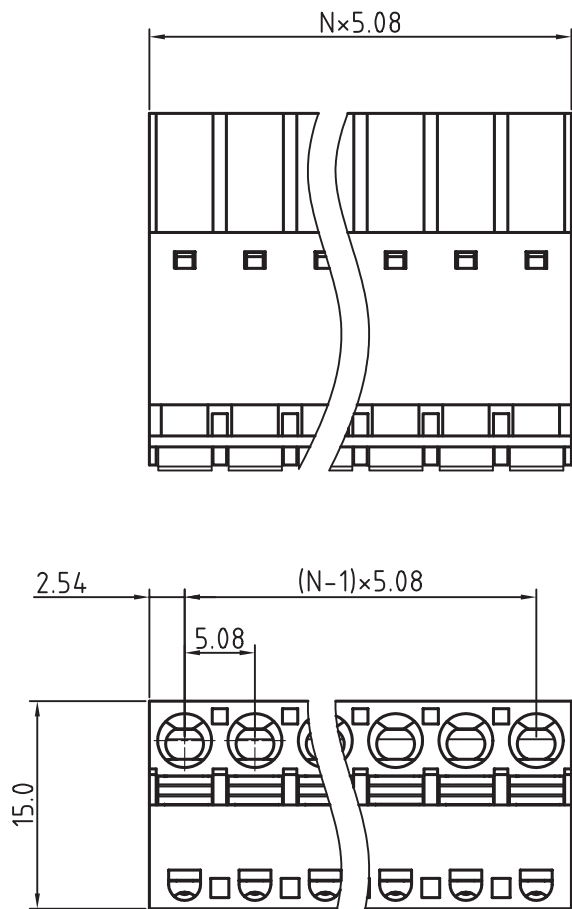

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PA 66
 FLAMABILITY RATING: UL94-V0
 COLOR: GREEN
 METAL HOUSING: BRASS (CuZn)
 CONTACT: PhBz TIN PLATED
 WIRE GUARD: STAINLESS STEEL

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 10A
 WORKING VOLTAGE: 300VAC
 WITHSTANDING VOLTAGE: 1.6KV
 CONTACT RESISTANCE: 20 mOhm MAX

MECHANICAL
 SOLID WIRE: 26-12 AWG / 0.13-3.0MM²
 STRANDED WIRE: 26-12 AWG / 0.13-3.0MM²


WIRE STRIPE LENGTH: 6-7MM
 PITCH: 5.08MM

PACKAGING
 BOX


SERIE 353


CERTIFICATION



RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK	DESCRIPTION: SERIE 353 - 5.08MM SCREWLESS VERTICAL CABLE ENTRY PLUG 3.0MM² WIRES WR-TBL WERI PART NO: 691 353 500 0xx	SIZE	
G									
F									
E									
D									
C	29-OCT-08	CHARACTERISTICS	JP	APPROVAL: RJ	UNIT: MM			A4	
B	19-MAR-08	PAGE 2	CH		SCALE:				
A	31-OCT-07	PDF	EC		SHEET: 1/2				
REV	DATE	FILE	BY		DRAW: MARVIN				

TEST POINT DETAILS:

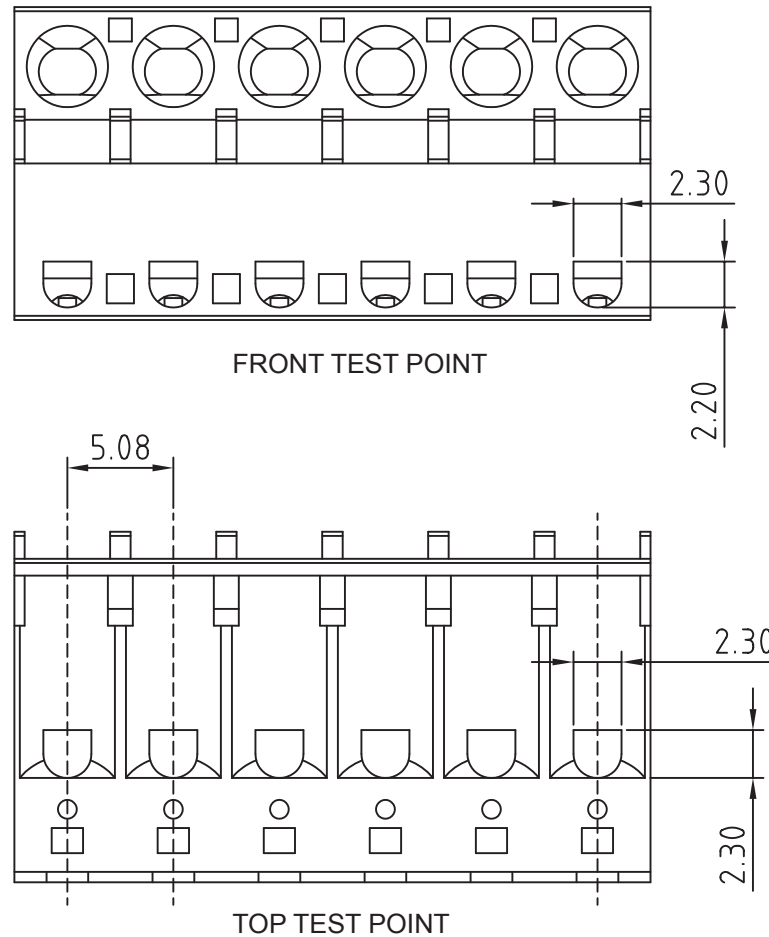

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15		DESCRIPTION: SERIE 353 - 5.08MM SCREWLESS VERTICAL CABLE ENTRY PLUG 3.0MM² WIRES WR-TBL WERI PART NO: 691 353 500 0xx	SIZE A4
G								
F								
E								
D								
C	29-OCT-08	CHARACTERISTICS	JP	APPROVAL: RJ	UNIT: MM			
B	19-MAR-08	PAGE 2	CH		SCALE:			
A	31-OCT-07	PDF	EC		SHEET: 1/2			
REV	DATE	FILE	BY		DRAW: MARVIN			