


## sectional drawing A-A

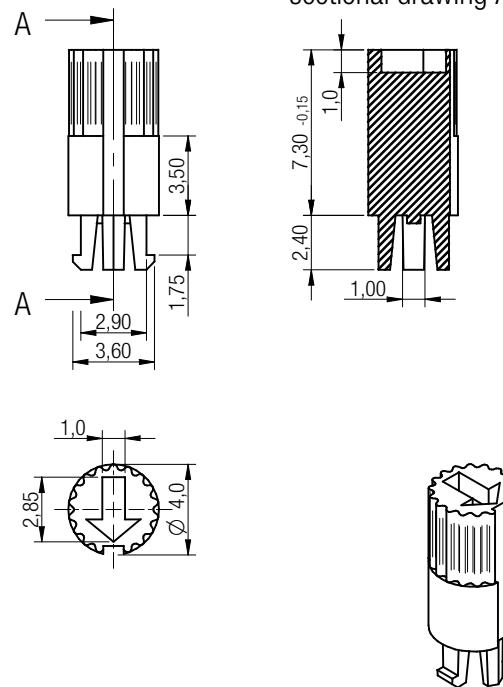

## TECHNICAL CHARACTERISTICS

## MATERIAL

>Base: POM UL HB

### **MOUNTING INSTRUCTION**

>Please mount the actuator that cut-out is in line with the positioning arrow of the rotary switch.

>For reflow soldering only to be fitted after the soldering process.

Scale - 3:1 **PACKAGING INFORMATION**  
>Bag

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

 <b>WÜRTH ELEKTRONIK</b>	Projection		GENERAL TOLERANCE			Basic material	
			$.X = +/- 0,2$	$.XX = +/- 0,15$			
			Date	Name	DESCRIPTION AssSw Spindle for Rotary Switch Cross type, colour: grey		
		Drawn	11-09-27	Jelisarow			
		Checked					
		 <b>Würth Elektronik</b> eiCAD	Würth Elektronik eiCAD		Scale 3:1	Position	SIZE
					Drawing.- No. 714284060		
							A4
REV	FILE	DATE	BY	EDV NO	714284060.dft	System Solid Edge V20	