

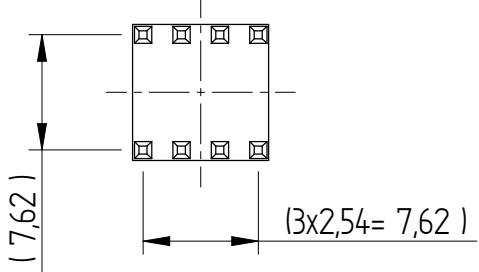


A

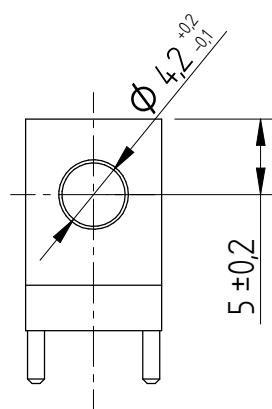


B


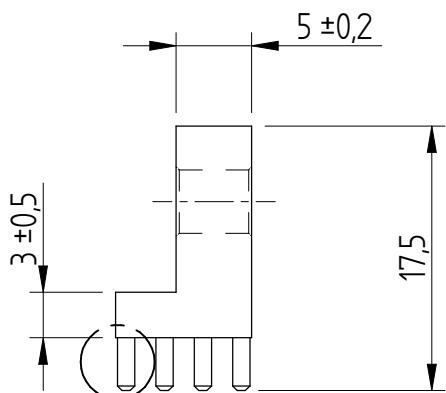


B

D

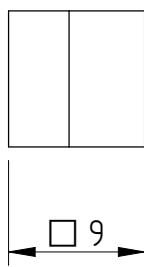

Bevelled edge 0,3 ± 0,2 around

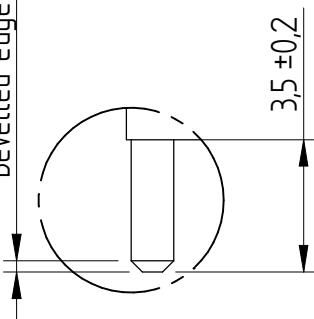

DETAIL B (5:1)

(1:1)

E


Execution: Press-Fit

Surface coating 5-10µm Sn on 2-4µm Cu

(1:1)


(PROJECTION)		(TOLERANCES)		(SURFACE)		SCALE	2:1	TOTAL WEIGHT: 6,0 g
		DIN ISO 2768-m				(MATERIAL)	CuZn39Pb3	WEIGHT Cu: 0,0196 g
DRAWN	DATE	NAME						WEIGHT Sn: 0,0400 g
	2009/07/15	Dino Cantara						
VERIFIED	2009/07/15	Heiko Schmid						

F




A

## Drill hole specification for chemical surfaces

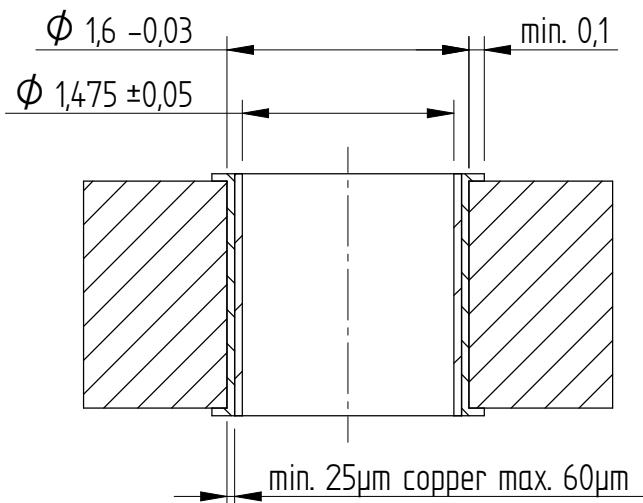

B

## Drill hole specification for HAL

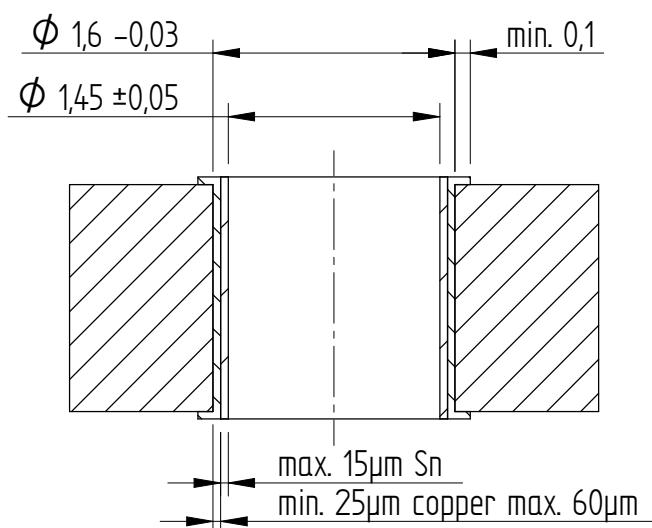


C

D

E

This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation check for the safety must be performed before by the user before usage.

(PROJECTION)



(TOLERANCES)

DIN ISO 2768-m

(SURFACE)

SCALE 20:1

(MATERIAL)

(TITLE)

Power Elements Specification

Press-fit system

F



(DRAWING NUMBER)

Sheet 1

1