


74760045

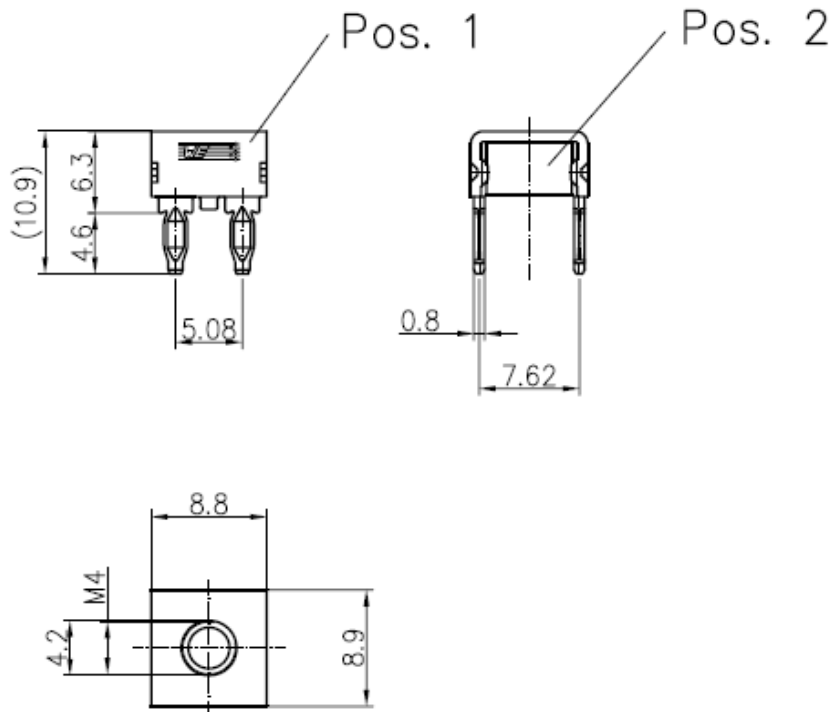

Max. Allowable Torque [M4]: 1.2Nm
 Borehole-Ø: 1.6 +/- 0.09mm
 Current Rating: Max. 20A / Element
 PCB-Thickness: 1.6 to 3.2mm
 Press-In Force: Min. 250N to Max. 1000N

Material:

Pos. 1: CuSn6
 Pos. 2: CuZn39Pb2
 Finish: Tin-plated
 Screw: CuZn37

74760045

POWERELEMENT W/ FLEXIBLE PINS
 ASSEMBLED WITH SCREW [M4]

Geprüft / Drawn
 Mark Wirth
 2009-07-06

Würth Elektronik eiSos GmbH & Co KG
 D – 74638 Waldenburg
 Max-Eyth-Straße 1
 Tel.: 0049 7942-945-0 / Fax: 0049 7942-945-400
www.we-online.de