

Output Specifications:


| MODEL NO. | OUTPUT RAIL | LOAD | | | | INITIAL ACCURACY | STEP EFFICIENCY | | | AVERAGE EFFICIENCY |
|------------------------|-------------|------|-------|-------|-------|------------------|-----------------|------------|-------------|--------------------|
| | | MIN. | RATED | MAX. | PEAK | | @ 20% LOAD | @ 50% LOAD | @ 100% LOAD | |
| SNP-HF37 SNP-HF37-A | +12V | 0A | 2.5A | 3.3A | 3.75A | +11.8V~+12.2V | 86% 72% | 87% 80% | 86% 82% | 86% 77% |
| SNP-HF38 SNP-HF38-A | +15V | 0A | 2A | 2.67A | 3A | +14.8V~+15.2V | 86% 74% | 87% 81% | 86% 82% | 86% 78% |
| SNP-HF39 SNP-HF39-A | +24V | 0A | 1.25A | 1.67A | 1.88A | +23.8V~+24.2V | 86% 74% | 87% 80% | 86% 84% | 86% 78% |
| SNP-HF3T SNP-HF3T-A | +48V | 0A | 0.63A | 0.83A | 0.94A | +47.6V~+48.4V | 86% 79% | 87% 85% | 86% 86% | 86% 83% |

Note:


- Standby Power Consumption with System:**
For computers and displays, ENERGY STAR in U.S. and ErP regulation in Europe require the input power should be less than 0.5W at standby mode.
- Output Load:**
30W for convection cooling; 40W for forced air cooling.
- Peak Load Duration:**
Peak 45W can last for 5 sec.
- Isolation Grade:**
Primary ↔ Ground : 1MOPP (1500Vac)
Primary ↔ Secondary : 2MOPP (4000Vac)
Secondary ↔ Ground : 1MOPP (1500Vac)
- Leakage Current:**
Earth leakage current < 300uA
Touch current < 100uA
- EMI Grounding:**
If there is a metal sheet under the power supply, connect the EMI ground to that metal sheet.
- Model Selection:**
Most of power supplies will create audible burst sound at light load, if the application wants to meet input power < 0.5W at standby mode.
SNP-HF3x is for ITE & Medical applications which require standby mode.
SNP-HF3x-A is for ITE & Medical applications but without burst sound and no standby mode.
There is SNP-HF3x on above model label and QC OK label on SNP-HF3x series, QC OK/A label on SNP-HF3x-A series to distinguish.

Performance for SNP-HF37-A:


1. Switching frequency ripple

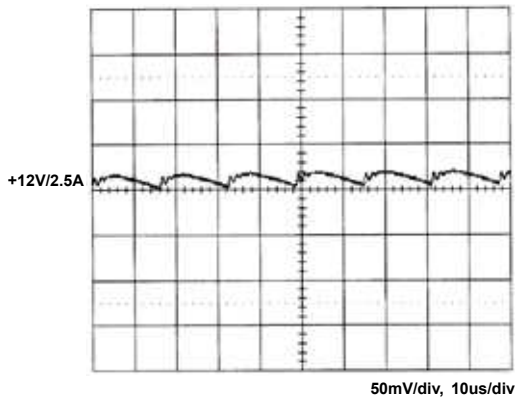


2. Line frequency ripple

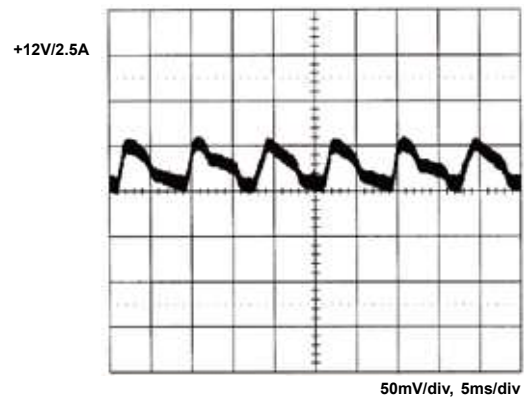


3. Output turn on wave form

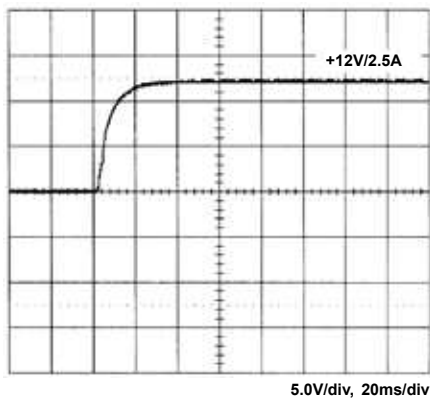


4. Output turn off wave form

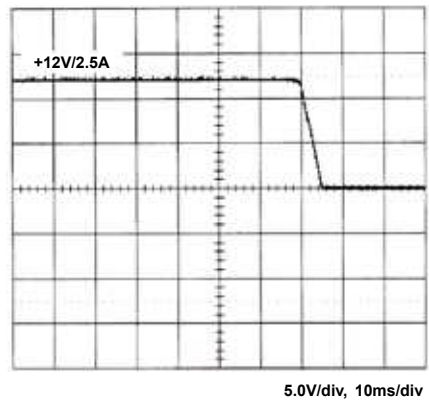


5. Hold-up time

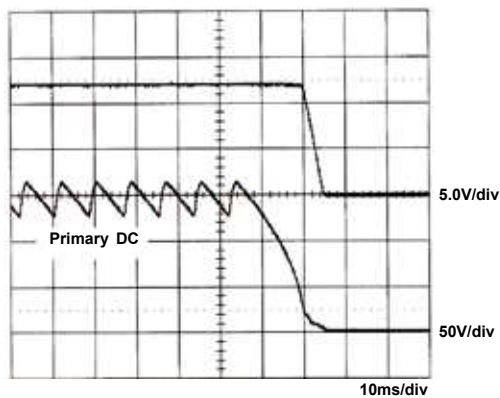


6. Over voltage protection

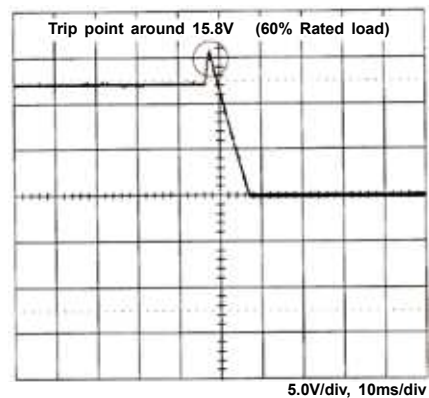


7. FCC B Class I

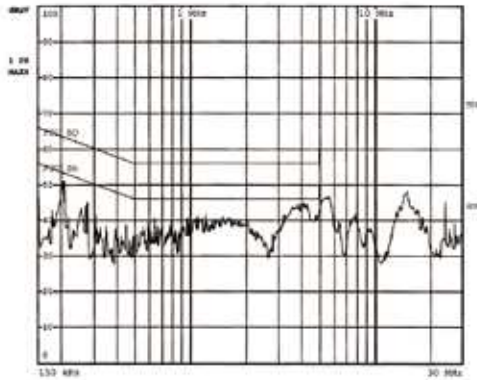


8. EN55011 22 B Class I

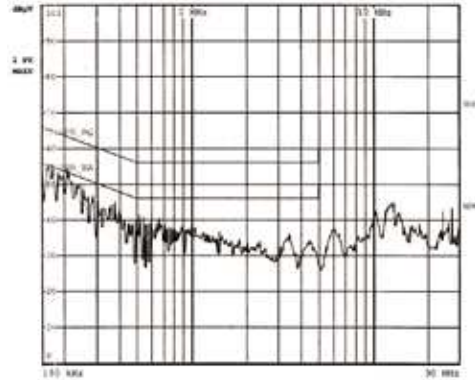


9. FCC B Class II

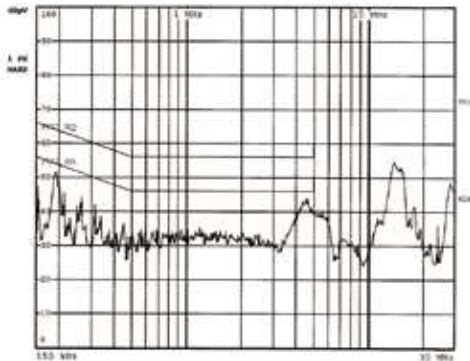

10. EN55011 22 B Class II

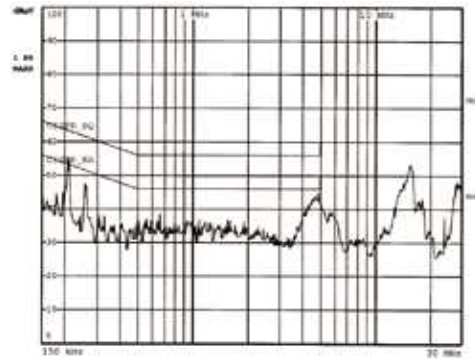

11. Power derating curve

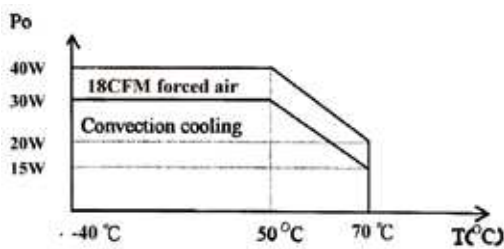

12. Torque capability

