



### Features:

- With built-in PFC
- 85% ~ 90% efficiency
- 60% power boost ability
- 23.5V to 29V adjustable output range
- Parallel operation:  
SNP-D129 & SNP-D249 by optional module  
SNP-D489 built-in
- Patented Ring-Free ZVS & Active PFC

### Applications:


- For ITE audio equipment, telecommunication, network, IPC, instrument equipment, and other uses.

### General Specifications:

Input voltage ..... 90VAC to 264VAC  
 Input current ..... < 2A @115VAC, < 1A @230VAC  
 Input frequency ..... 47Hz to 63Hz  
 Inrush current ..... < 30A @ 115VAC  
 (cold start at 25°C) or < 60A @ 230VAC  
 Outputs ..... see output table  
 Efficiency ..... 87% typical at 230VAC  
 Hold up time ..... > 20ms  
 at 115VAC input  
 Over voltage protection ..... latch off

Over load protection ..... auto recovery  
 Short circuit protection ..... auto recovery  
 Operating temperature ..... -10°C to +70°C  
 (derating: typ. 3W/K > 60°C)  
 Cooling ..... free air convection  
 Storage temperature ..... -25°C to +85°C  
 EMI standard ..... FCC docket 20780 curve "B"  
 EN55022 "B", EN61000-3-2 Class D  
 Safety ..... UL 1950, UL 508  
 CSA C22.2 No. 950-M90  
 EN 60950

### Mechanical Specifications:

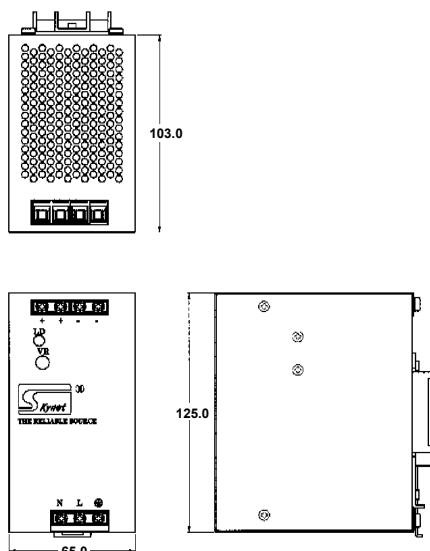

### Note:

1. Dimensions shown in mm as left. Tolerance specified is  $\pm 0.4$  mm.
2. Size:  
65 x 125 x 103 (mm)
3. Packing:  
Net weight: 730 g approx. / unit  
Gross weight: 15.2 kg approx. / carton, 18 units / carton  
Carton size (mm): 529 (L) x 372 (W) x 323 (H)
4. Connectors:  
AC & DC Connector : Terminal blocks  
(suitable wire 26~10AWG)
5. Power on indicator:  
Green light on the panel
6. Hook:  
For standard symmetrical 35mm DIN-rail

-Clark-

**10 years Warranty (contact Skynet's Distributors for details)**

## Output Specifications:


MODEL NO.	OUTPUT RAIL	LOAD				VOLTAGE ACCURACY	RIPPLE NOISE	LINE REG.	LOAD REG.
		MIN.	RATED	MAX.	PEAK				
SNP-D129	+24V	0A	5A		6A	±2%	<40mVpp	±1%	±1%

### Notes:


1. Each output can deliver peak load for max. 1 min. at 45°C or even continuous with forced cooling.
2. At factory, in 60% rated load condition, the output is checked to be within the accuracy range while the main output is set within the specified accuracy range at rated load.
3. Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.
4. Load regulation is defined by changing ±40% of measured output load from 60% rated load.
5. Ripple & noise is measured by using 15MHz bandwidth limited oscilloscope and terminated the output with a 0.47uF capacitor at rated load and nominal line.
6. Hold up time is measured from the end of the last charging pulse to the time when the main output drop down to regulation limit at rated load and nominal line.
7. Efficiency is measured at rated load and nominal line.

**Performance** (input voltage is 115VAC, unless others specified):


1. Switching frequency ripple

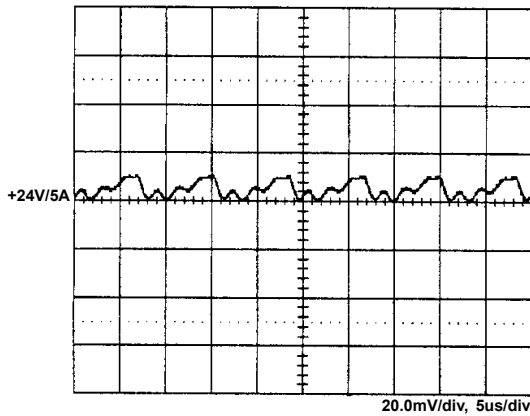


2. Line frequency ripple

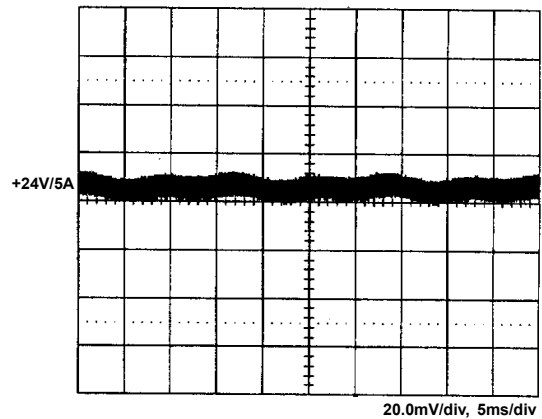


3. Output turn on wave form

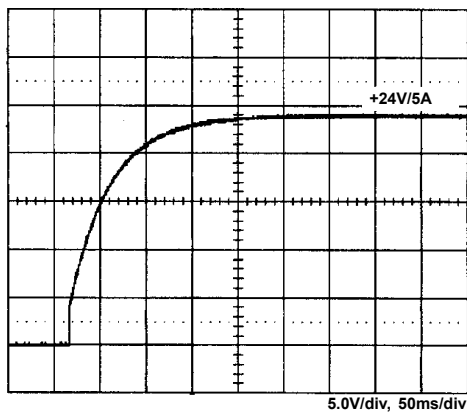


4. Output turn off wave form

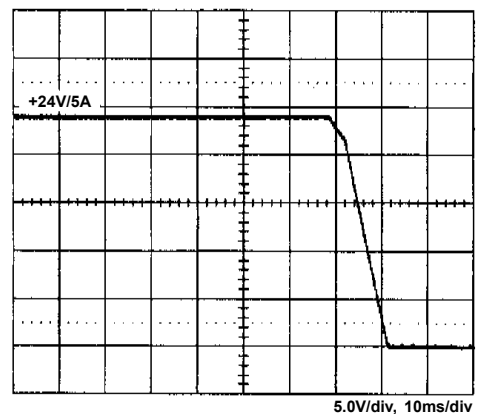


5. Hold-up time

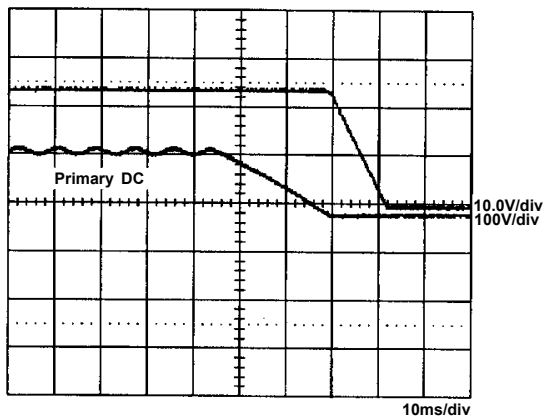


6. Over voltage protection

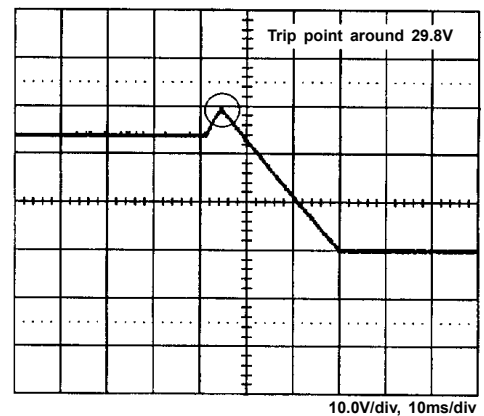


7. +24V step response

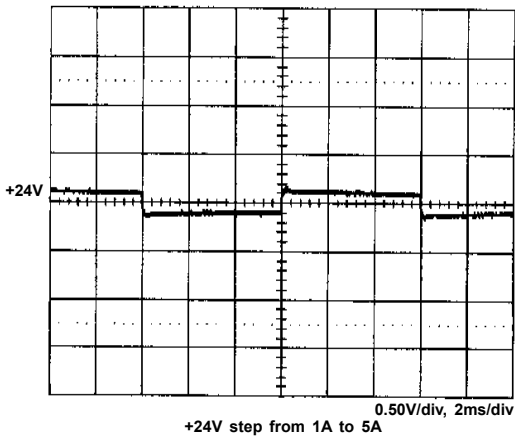

8. FCC B

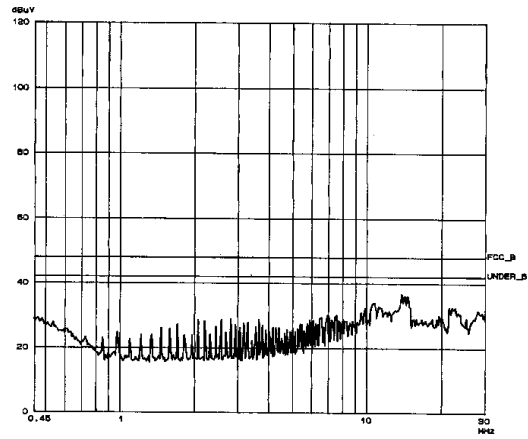

9. EN 55022 B

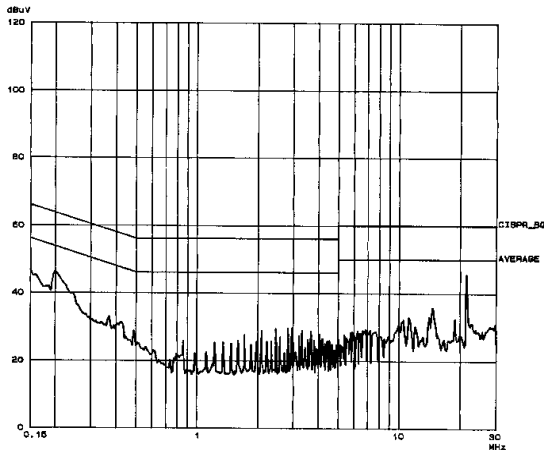

10. Power derating curve

