


SBA Solenoid




Specifications


Type of Operation: Push or pull
Standard Voltages: 6 VDC, 12 VDC, 24 VDC, (Others available on request)
Insulation Material: Class "B" standard (Others available on request)
Coil Finish: Acetate tape standard (Also available: varnish dip, glass cloth tape, fungus resistant finish)
Coil Terminations: Terminals per drawing standard (Also available: flying leads, bent terminals, banded terminals, solder lugs)

Plating Standards: Frame — Zinc, chromate; Clevis — Zinc; Plunger — Electroplate Nickel; Stop — Electroless Nickel (Others available on request)
Plunger Type: Slot and cross drilled per drawing standard (Options available per drawing)
Plunger Weight: 0.2 ounces standard

Dimensions

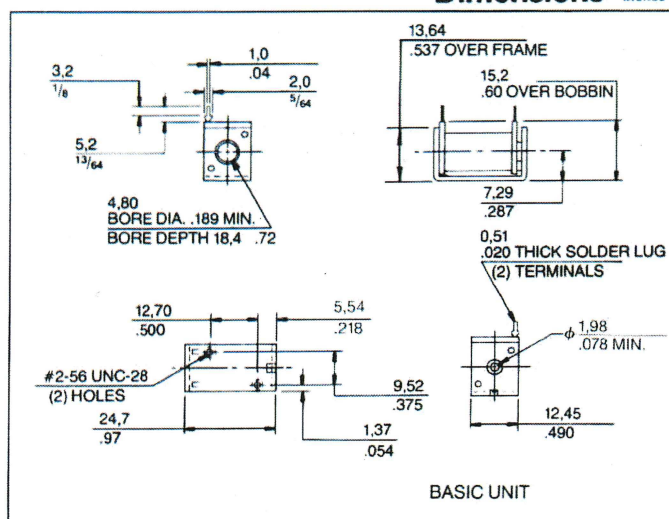


DC Performance Data

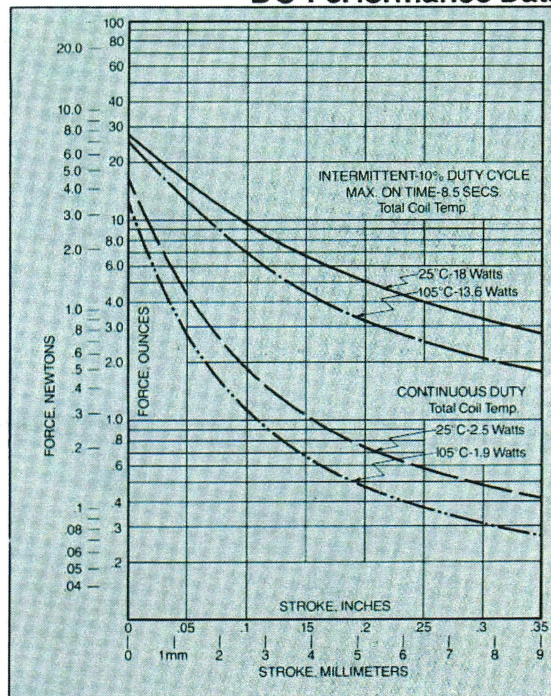

Duty Cycle	Maximum "On" Time	Stroke (inches)	Force* (ounces)	Rated Power (watts)
Continuous	∞	0.0	15.0	2.5
		0.1	1.8	
		0.2	0.71	
		0.3	0.47	
10%	8.5 sec.	0.0	26.0	18.0
		0.1	9.6	
		0.2	5.0	
		0.3	3.5	

* TYPICAL FORCE @ 25°C AND NOMINAL RATED DC VOLTAGE

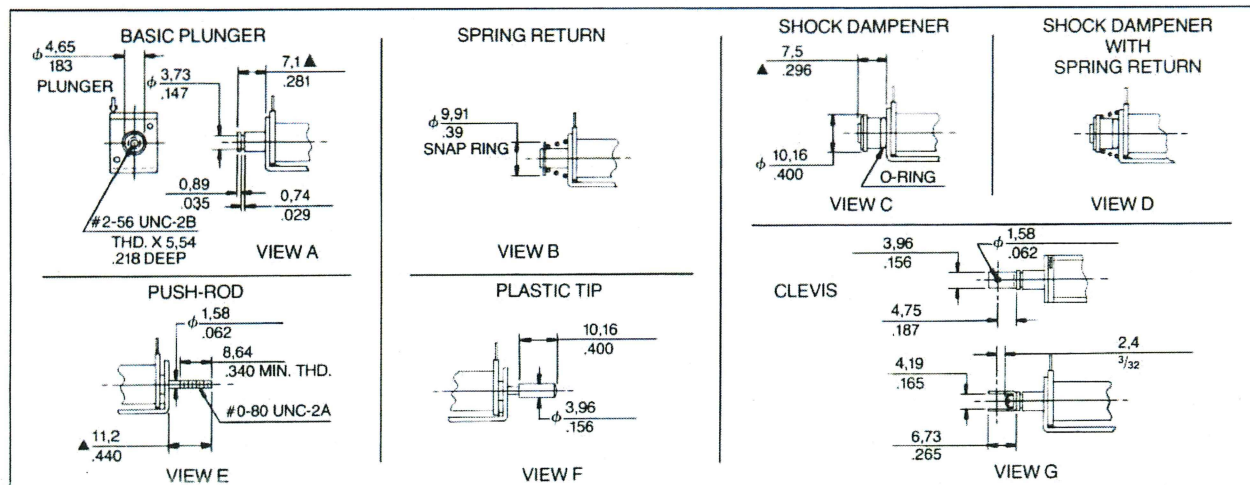

▲ ENERGIZED DIM.

JEWELL INSTRUMENTS, LLC

850 PERIMETER ROAD → MANCHESTER, NEW HAMPSHIRE 03103 USA
 TOLL FREE: 800 227-5955 → TEL: 603 669-6400 → FAX: 603 669-5962
 EMAIL: sales@jewellinstruments.com → WEB: www.jewellinstruments.com