



CellAdvisor™

JD746B RF Analyzer Specifications

Spectrum Analyzer (standard)

Frequency		
Frequency range	100 kHz to 4 GHz	
Internal 10 MHz Frequency Reference		
Accuracy	±0.05 ppm + aging (0 to 50°C)	
Aging	±0.5 ppm/year	
Frequency Span		
Range	0 Hz (zero span) 10 Hz to 4 GHz	
Resolution	1 Hz	
Resolution Bandwidth (RBW)		
-3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence
Accuracy	±10% (nominal)	
Video Bandwidth (VBW)		
-3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence
Accuracy	±10% (nominal)	
Single Sideband (SSB) Phase Noise		
Fc 1 GHz, RBW 10 kHz, VBW 1 kHz, RMS detector		
Carrier Offset		
30 kHz	<-90 dBc/Hz (typical)	
100 kHz	<-95 dBc/Hz (typical)	
1 MHz	<-102 dBc/Hz (typical)	
Measurement Range		
DANL to +20 dBm		
Input attenuator range	0 to 50 dB, 5 dB steps	
Maximum Input Level		
Average continuous power	+20 dBm	
DC voltage	±50 VDC	

Spectrum Analyzer: 100 kHz to 4 GHz

Cable and Antenna Analyzer: 5 MHz to 4 GHz

Power Meter: 10 MHz to 4 GHz

Specification Conditions

JD746B specifications apply under these conditions:

- The instrument has been turned on for at least 15 minutes
- The instrument is operating within a valid calibration period
- Data with no tolerance are considered typical values
- Cable and antenna measurements apply after calibration to the OSL standard
- Typical and nominal values are defined as:
 - Typical: expected performance of the instrument operating at 20 to 30°C after being at this temperature for 15 minutes
 - Nominal: a general, descriptive term or parameter

Displayed Average Noise Level (DANL)	
1 Hz RBW, 1 Hz VBW, 50 Ω termination, 0 dB attenuation, RMS detector	
Preamplifier Off	
10 MHz to 2.3 GHz	-140 dBm (-146 dBm, typical)
>2.3 GHz to 3 GHz	-138 dBm (-144 dBm, typical)
>3 GHz to 4 GHz	-135 dBm (-140 dBm, typical)
Preamplifier On	
10 MHz to 2.3 GHz	-155 dBm (-160 dBm, typical)
>2.3 GHz to 3 GHz	-153 dBm (-158 dBm, typical)
>3 GHz to 4 GHz	-150 dBm (-156 dBm, typical)
Display Range	
Log scale and units (10 divisions displayed)	1 to 20 dB/division in 1 dB steps dBm, dBV, dBmV, dBμV
Linear scale and units (10 divisions displayed)	V, mV, mW, W
Detectors	Normal, positive peak, sample, negative peak, RMS
Number of traces	6
Trace functions	Clear/write, maximum hold, minimum hold, capture, load view on/off, trace math
Total Absolute Amplitude Accuracy	
Preamplifier off, power level >-50 dBm, auto-coupled (20 to 30°C)	
5 MHz to 4 GHz	±1.25 dB, ±0.5 dB (typical)
	Attenuation <40 dB
	±1.55 dB, ±1.0 dB (typical)
	Attenuation ≥40 dB
Reference Level	
Setting range	-120 to +100 dBm
Setting Resolution	
Log scale	0.1 dB
Linear scale	1% of reference level
Markers	
Marker types	Normal, delta, delta pair, noise, frequency count marker
Number of markers	6
Marker functions	Peak, next peak, next peak left, next peak right, minimum search marker to center/start/stop, always peak on/off
RF Input VSWR	
20 MHz to 4 GHz	1.5:1 (typical)
Second Harmonic Distortion	
Mixer level	-25 dBm
10 MHz to 1.3 GHz	<-65 dBc (typical)
>1.3 GHz to 4 GHz	<-70 dBc (typical)
Third-Order Inter-Modulation (third-order intercept: TOI)	
200 MHz to 2 GHz	+10 dBm (typical)
>2 GHz to 4 GHz	+12 dBm (typical)

Spurious	
Inherent residual response	
Input terminated, 0 dB attenuation, preamplifier off, RBW at 10 kHz, Sweep mode	
20 MHz to 3 GHz	-90 dBm (nominal)
>3 GHz to 4 GHz	-85 dBm (nominal)
Exceptions	<-70 dBm at 227.88/1791.8/2647.8/2927.3/3195.2/3915.1/3640 MHz
Input-related spurious	<-67 dBc (nominal)
Dynamic Range	
2/3 (TOI-DANL) in 1 Hz RBW	>95 dB
Sweep Time	
Range	80 ms to 1000 s 24 μs to 200 s
	Span=0 Hz (zero span)
Accuracy	±2%
	Span=0 Hz (zero span)
Mode	Continuous, single
Gated Sweep	
Trigger source	External, video, and GPS
Gate length	1 μs to 100 ms
Gate delay	0 to 100 ms
Trigger	
Trigger source	Free run, video, external
Trigger Delay	
Range	0 to 200 s
Resolution	6 μs
Measurements*	
Channel power	
Occupied bandwidth	
Spectrum emission mask	
Adjacent channel power	
Spurious emissions	
Field strength	
AM/FM audio demodulation	
Route map	
PIM detection	
Dual spectrum	

* CW signal generator (Option 003) can be set up simultaneously.

Cable and Antenna Analyzer (standard)

Frequency	
Range	5 MHz to 4 GHz
Resolution	10 kHz
Accuracy	±25 ppm + aging (20 to 30°C)
Aging	±5 ppm
Data Points	
126, 251, 501, 1001	
Measurement Speed	
1.65 ms/point (nominal)	
Measurement Accuracy	
Corrected directivity	40 dB
Reflection uncertainty	$\pm(0.3 + 20\log(1 + 10^{-EP/20}))$ (typical) EP = directivity – measured return loss
Output Power	
High	0 dBm (typical)
Low	-30 dBm (typical)
Dynamic Range	
Reflection	60 dB
Maximum Input Level	
Average continuous power	+25 dBm (nominal)
DC voltage	±50 VDC
Interference Immunity	
On channel	+17 dBm at >1.4 MHz from carrier frequency (nominal)
On frequency	0 dBm within ±10 kHz from the carrier frequency (nominal)
Measurements	
Reflection (VSWR)	
VSWR range	1 to 65
Return loss range	0 to 60 dB
Resolution	0.01
Distance to Fault (DTF)	
Vertical VSWR range	1 to 65
Vertical return loss range	1 to 60 dB
Vertical resolution	0.01
Horizontal range	0 to (# of data points – 1) x horizontal resolution Maximum = 1500 m (4921 ft)
Horizontal resolution	$(1.5 \times 10^9) \times (V_p)/\Delta$ V_p = propagation velocity Δ = stop freq – start freq (Hz)
Cable Loss (1-port)	
Range	0 to 30 dB
Resolution	0.01 dB
1-Port Phase	
Range	-180 to +180°
Resolution	0.01°
Smith Chart	
Resolution	0.01

RF Power Meter (standard)

General Parameters			
Display range	100 to +100 dBm		
Offset range	0 to 60 dB		
Resolution	0.01 dB or 0.1 xW (x = m, u, p)		
Internal RF Power Sensor			
Frequency range	10 MHz to 4 GHz		
Span	100 kHz to 100 MHz		
Dynamic range	-120 to +20 dBm		
Maximum power	+20 dBm		
Accuracy	Same as spectrum analyzer		
External RF Power Sensors			
Directional	JD731B	JD733A	
Frequency range	300 MHz to 3.8 GHz	150 MHz to 3.5 GHz	
Dynamic range	0.15 to 150W (average) 4 to 400 W (peak)	0.1 to 50 W (average) 0.1 to 50 W (peak)	
Connector type	Type-N female on both ends		
Measurement type	Forward/reverse average power, forward peak power, VSWR		
Accuracy	$\pm(4\% \text{ of reading} + 0.05 \text{ W})^{1,2}$		
Terminating	JD732B	JD734B	JD736B
Frequency range	20 MHz to 3.8 GHz		
Dynamic range	-30 to +20 dBm		
Connector type	Type-N male		
Measurement type	Average	Peak	Average and peak
Accuracy	$\pm 7\%^1$		

Optical Power Meter (standard)


Optical Power Meter		
Display range	-100 to +100 dBm	
Offset range	0 to 60 dB	
Resolution	0.01 dB or 0.1 mW	
External Optical Power Sensors		
	MP-60A	MP-80A
Wavelength range	780 to 1650 nm	
Max permitted input level	+10 dBm	+23 dBm
Connector type	Type-N female on both ends	
Connector input	Universal 2.5 and 1.25 mm	
Accuracy	±5%	

1. CW condition at 25°C ±10°C

2. Forward power

2-Port Transmission Measurements (Option 001)

Frequency	
Frequency range	5 MHz to 4 GHz
Frequency resolution	10 kHz
Transmission uncertainty	

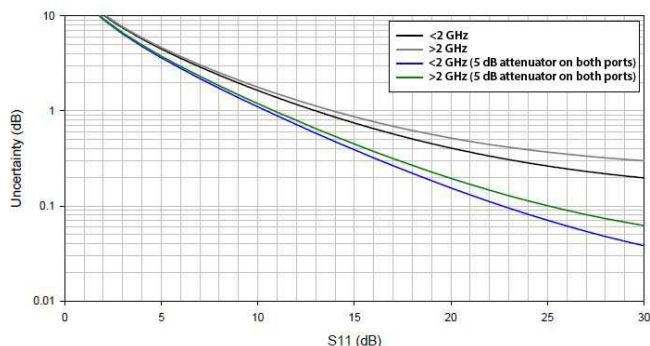

Use 5 dB attenuators on both ports to lessen uncertainty.

Output Power	
High	0 dBm (typical)
Low	-30 dBm (typical)
Measurement Speed	
Vector	2.2 ms/point (nominal)
Dynamic Range	
Vector	5 MHz to 3 GHz, 80 dB >3 GHz to 4 GHz, 75 dB
Scalar	5 MHz to 4 GHz, >100 dB
Measurements	
Insertion Loss/Gain	
Range	-120 to 100 dB
Resolution	0.01 dB
2-Port Phase	
Range	-180 to +180°
Resolution	0.01°

Bias-Tee (Option 002)

Voltage	
Voltage range	+12 to +32V
Voltage resolution	0.1V
Power	
8W Max	

CW Signal Generator (Option 003)

Frequency	
Frequency range	25 MHz to 4 GHz
Frequency reference	±25 ppm Maximum
Frequency resolution	10 kHz
Output Power	
Range	0 dBm, -30 to -80 dBm
Step	1 dB
Accuracy	±1.5 dB (15 to 35°C)

GPS Receiver and Antenna (Option 010)

GPS Indicator		
Latitude, longitude, altitude		
High-Frequency Accuracy		
Spectrum, interference, and signal analyzer		
GPS lock	±25 ppb	
Hold over (for 3 days)	±50 ppb (0 to 50°C)	15 minutes after satellite locked
Connector	SMA, female	

Interference Analyzer (Option 011)

Measurements	
Spectrum analyzer	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
Spectrogram	Collect up to 72 hours of data
RSSI	Collect up to 72 hours of data
Interference finder	
Spectrum replayer	
Dual spectrogram	

Channel Scanner (Option 012)

Frequency Range	
10 MHz to 4 GHz	
Measurement Range	
110 to +20 dBm	
Measurements	
Channel scanner	1 to 20 channels
Frequency scanner	1 to 20 frequencies
Custom scanner	1 to 20 channels or frequencies

RfCPRI/Interference Analyzer (Options 008, 060, 061, 062, 063, 064, and 065)

General Parameters					
Optical interface		Dual SFP/SFP+ (supports all MSA compliant SFP modules)			
Line rates		614.4 Mbps (1x), 1228.8 Mbps (2x)		Option 008 and 060	
		2457.6 Mbps (4x)		Option 008 and 061	
		3072.0 Mbps (5x)		Option 008 and 062	
		4915.2 Mbps (8x)		Option 008 and 063	
		6144.0 Mbps (10x)		Option 008 and 064	
		9830.4 Mbps (16x)		Option 008 and 065	
Resolution Bandwidth (RBW)					
-3 dB bandwidth		1 kHz to 10 kHz (span ≤ 3.84 MHz) 1 KHz to 100 kHz (3.84 MHz < span < 30.86 MHz)		1-3-10 sequence	
Accuracy		±10% (nominal)			
VBW					
-3 dB bandwidth		1 Hz to 100 KHz		1-3-10 sequence	
Accuracy		±10% (nominal)			
CPRI Parameter					
IQ Sample width		4 – 20 (step 1)			
Mapping method		1 and 3			
TX clock		Internal/external/recovered			
Port type		Master/slave			
Map position		AxC#0 – AxC#7			
Bandwidth		1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
Measurements					
Layer-2 Monitoring		Layer-2 Term		Interference Analyzer	
Port 1	Port 2	Port 1 or 2 (exclusive)		Spectrum	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
LOS	LOS	LOS	SDI		
LOF	LOF	LOF	RAI		
SDI	SDI	Optic RX level	dBm	Spectrogram	Collect up to 72 hr of data
RAI	RAI	Protocol version	1 to 10		
Optic RX level	Optic RX level	C and M HDLC rate (kbps)	No HDLC, 240, 480, 960, 1920, 2400	RSSI	Collect up to 72 hr of data
SFP Information	SFP Information			Spectrum replay	X1, x2, x4, x8
Wavelength	Wavelength	C and M Ethernet subchannel number	20 to 63	PIM Detection	
Vendor	Vendor			Single carrier	
Vendor PN	Vendor PN	Alarm Injection		Multi carrier	
Vendor rev	Vendor rev	R-LOS	Single	PIM calculator	
Power level type	Power level type	R-LOF	Single		
Diagnostic byte	Diagnostic byte	Error Injection			
Nominal rate	Nominal rate	Code	Single/rate		
Min rate	Min rate	K30.7	Single/rate		
Max RX level	Max RX level	Error rate	1E-3 to 1E-9		
Max TX level	Max TX level				

Bluetooth Connectivity (Option 013)

Personal area network (PAN)
File transfer profile (FTP)

General Information

Inputs and Outputs		
RF In	Spectrum analyzer	
Connector	Type-N, female	
Impedance	50 Ω (nominal)	
Damage level	>+40 dBm, ±50 V DC (nominal)	
Reflection/RF Out	Cable and antenna analyzer	
Connector	Type-N, female	
Impedance	50 Ω (nominal)	
Damage level	>+37 dBm, ±50 V DC (nominal)	
RF In	Cable and antenna analyzer	
Connector	Type-N, female	
Impedance	50 Ω (nominal)	
Damage level	>+25 dBm, ±50 V DC (nominal)	
External Trigger, GPS		
Connector	SMA, female	
Impedance	50 Ω (nominal)	
External Ref		
Connector	SMA, female	
Impedance	50 Ω (nominal)	
Input frequency	10 MHz, 13 MHz, 15 MHz	
Input range	-5 to +5 dBm	
USB		
USB host ¹	Type A, 1 port	
USB client ²	Type B, 1 port	
SFP Cage		
Port 1	RFoFiber (with option 008)	
Port 2	SFP/SFP+ compatible	
LAN	RJ45, 10/100Base-T	
Audio jack	3.5 mm headphone jack	
External power	5.5 mm barrel connector	
Speaker	Built-in speaker	
Display		
Type	Resistive touch screen	
Size	8 inch, LED backlight, transfective LCD with anti-glare coating	
Power		
External DC input	18 to 19 V DC	
Power consumption	42 W	54 W maximum (when charging battery)

Battery		
Type	10.8V, 7800 mA/hr (Lithium ion)	
Operating time	>3 hr (typical at spectrum analyzer)	
Charge time	3 hr (while not operating) 9 hr (while operating)	
Charging temperature	0 to 45°C (32 to 104°F) ≤85% RH	
Discharging temperature	-20 to 55°C (4 to 131°F) ≤85% RH	
Storage temperature ³	0 to 25°C (32 to 77°F)	
Data Storage		
Internal ⁴	Maximum 512 MB	
External ⁵	Limited by size of USB flash drive	
Environmental		
Operating Temperature		
AC power	0 to 40°C (32 to 104°F) with no derating	
Battery	0 to 40°C (32 to 104°F) at charging -10 to 55°C (14 to 131°F) at discharging -10 to 50°C (14 to 122°F) at discharging with Option 008	
Maximum humidity	95% RH (noncondensing)	
Shock and vibration	MIL-PRF-28800F class 2	
Storage temperature ⁶	-30 to 71°C (-22 to 160°F)	
EMC		
IEC/EN 61326-1:2013 (complies with European EMC)		
CISPR11:2009+A1:2010		
ESD		
IEC/EN 61000-4-2		
Size and Weight (standard configuration)		
Weight (with battery)	Standard	4.17 kg (9.19 lb)
	Full loaded	4.34 kg (9.57 lb)
Size (W x H x D)	295 x 195 x 82 mm	
Warranty		
2 years		
Calibration Cycle		
1 year		

1. Connects flash drive, power sensor, EZ-Cal kit, and fiber microscope.
2. Connects to PC for data transfer.
3. 20 to 85% RH, store battery pack in low-humidity environment; extended exposure to temperature above 45°C could significantly degrade battery performance and life.
4. Up to 3800 traces.
5. Supports USB 2.0 compatible memory devices.
6. With the battery pack removed.

Ordering Information

Description	Part Number
Standard CellAdvisor RF Analyzer	
100 kHz to 4 GHz spectrum analyzer 5 MHz to 4 GHz cable and antenna analyzer ¹ 10 MHz to 4 GHz RF power meter (internal mode)	JD746B ¹
Options	
NOTE: Upgrade options for the JD746B use the designation JD746BU before the respective last three-digit option number.	
2-port transmission measurement ²	JD746B001
Bias-tee ³	JD746B002
CW signal generator	JD746B003
Optical hardware ⁴	JD746B008
GPS receiver and antenna	JD746B010
Interference analyzer ^{6,7}	JD746B011
Channel scanner	JD746B012
Bluetooth connectivity ⁵	JD746B013
RFoCPRI 614 Mbps and 1.2 Gbps interference analyzer ¹²	JD746B060
RFoCPRI 2.4 Gbps interference analyzer ¹²	JD746B061
RFoCPRI 3.1 Gbps interference analyzer ¹²	JD746B062
RFoCPRI 4.9 Gbps interference analyzer ¹²	JD746B063
RFoCPRI 6.1 Gbps interference analyzer ¹²	JD746B064
RFoCPRI 9.8 Gbps interference analyzer ¹²	JD746B065
Standard Accessories	
AC/DC power adapter ⁸	G700550326
Cross LAN cable (1.5 m) ⁸	G710550335
USB A to B cable (1.8 m) ⁸	GC73050515
>1 GB USB memory ⁸	GC72450518
Rechargeable lithium ion battery ⁸	G710550325
Automotive cigarette lighter 12 V DC adapter ⁸	G710550323
Optional Calibration Kits	
Y-calibration kit Type-N(m), DC to 6 GHz, 50 Ω	JD78050509
Y-calibration kit DIN(m), DC to 6 GHz, 50 Ω	JD78050510
Dual port Type-N 6 GHz calibration kit	JD78050507
Dual port DIN 6 GHz calibration kit	JD78050508
Optional RF Cables	
RF cable DC to 8 GHz Type-N(m) to Type-N(m), 1.0 m	G700050530
RF cable DC to 8 GHz Type-N(m) to Type-N(f), 1.5 m	G700050531
RF cable DC to 8 GHz Type-N(m) to Type-N(f), 3.0 m	G700050532
RF cable DC to 18 GHz Type-N(m) to SMA(m), 1.5 m	G710050533
RF cable DC to 18 GHz Type-N(m) to QMA(m), 1.5 m	G710050534
RF cable DC to 18 GHz Type-N(m) to SMB(m), 1.5 m	G710050535
RF cable DC to 6 GHz Type-N(m) to DIN(f), 1.5 m	G710050536
Phase-stable RF cable with grip DC to 6 GHz Type-N(m) to Type-N(f), 1.5 m	G700050540
Phase-stable RF cable with grip DC to 6 GHz Type-N(m) to DIN(f), 1.5 m	G700050541

Description	Part Number
Optional Omni Antennas	
RF omni antenna Type-N(m), 806 to 896 MHz	G700050353
RF omni antenna Type-N(m), 870 to 960 MHz	G700050354
RF omni antenna Type-N(m), 1710 to 2170 MHz	G700050355
RF omni antenna Type-N(m), 720 to 800 MHz	G700050356
RF omni antenna Type-N(m), 2300 to 2700 MHz	G700050357
Optional Yagi Antennas	
RF Yagi antenna Type-N(f), 1750 to 2390 MHz, 10.2 dBd ⁹	G700050363
RF Yagi antenna Type-N(f), 806 to 896 MHz, 10.2 dBd ⁹	G700050364
RF Yagi antenna Type-N(f), 866 to 960 MHz, 9.8 dBd ⁹	G700050365
RF Yagi antenna SMA(f), 700 to 4000 MHz, 1.85 dBd ¹⁰	G700050366
Optional RF Power Sensors	
Directional power sensor, peak and average power 300 to 3800 MHz	JD731B
Terminating power sensor, average power 20 to 3800 MHz	JD732B
Directional power sensor, peak and average power 150 to 3500 MHz	JD733A
Terminating power sensor, peak power 20 to 3800 MHz	JD734B
Terminating power sensor, dual (average/peak) power 20 to 3800 MHz	JD736B
Optional Optical Power Meters and Fiber Microscope Kits	
USB optical power meter with software, 2.5 and 1.25 mm interfaces, 30-inch USB extender, and carrying pouch	MP-60A
USB optical power meter — high power with software, 2.5 and 1.25 mm interfaces, 30-inch USB extender, and carrying pouch	MP-80A
KIT: FBP-P5000i digital probe, FiberChekPRO software, case, and tips	FBP-SD101
KIT: FBP-P5000i digital probe, FiberChekPRO software, case, and tips	FBP-MTS-101
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters	FIT-SD103
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters, and cleaning materials	FIT-SD103-C
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters	FIT-SD113

Ordering Information (continued)

Description	Part Number
Optional RF Adapters	
Adapter Type-N(m) to DIN(f), DC to 7.5 GHz, 50 Ω	G700050571
Adapter DIN(m) to DIN(m), DC to 7.5 GHz, 50 Ω	G700050572
Adapter Type-N(m) to SMA(f) DC to 18 GHz, 50 Ω	G700050573
Adapter Type-N(m) to BNC(f), DC to 4 GHz, 50 Ω	G700050574
Adapter Type-N(f) to Type-N(f), DC to 18 GHz 50 Ω	G700050575
Adapter Type-N(m) to DIN(m), DC to 7.5 GHz, 50 Ω	G700050576
Adapter Type-N(f) to DIN(f), DC to 7.5 GHz, 50 Ω	G700050577
Adapter Type-N(f) to DIN(m), DC to 7.5 GHz, 50 Ω	G700050578
Adapter DIN(f) to DIN(f), DC to 7.5 GHz, 50 Ω	G700050579
Adapter Type-N(m) to Type-N(m), DC to 11 GHz 50 Ω	G700050580
Adapter N(m) to QMA(f), DC to 6.0 GHz, 50 Ω	G700050581
Adapter N(m) to QMA(m), DC to 6.0 GHz, 50 Ω	G700050582
Optional Miscellaneous	
Soft carrying case	JD74050341
Hard carrying case	JD71050342
Hard carrying case with wheels	JD70050342
CellAdvisor backpack carrying case	JD70050343
External battery charger	G71050324
Attenuator 40 dB, 100 W, DC to 4 GHz (Unidirectional)	G710050581
JD700B series user's guide — printed version	JD700B362
USB Bluetooth dongle and dipole antenna 5 dBi	JD70050006
Optional TAP	
Optical nTAP, three-channel, 50 μm, MM, LC, 50/50 split ratio	TO3-M5-LC-55-K
Optical nTAP, three-channel, 9 μm, SM, LC, 50/50 split ratio	TO3-SM-LC-55-K

Description	Part Number
Optional SFP Transceiver	
SFP 4/2/1 G Fibre Channel and 1 G Ethernet, 850 nm, 150 – 500 m, SX 3.072/2.4/1.2 Gbps, 614 Mbps CPRI; 3.072/1.5 Gbps, 768 Mbps OBSAI	CSFP-4G-8-1
SFP 4G/2G/1G Fibre Channel and 1 G Ethernet, 1310 nm, 5 km, LX 3.072/2.4/1.2 Gbps, 614 Mbps CPRI; 3.072/1.5 Gbps, 768 Mbps OBSAI	CSFP-4G-3-1
SFP 4G/2G/1G Fibre Channel and 1 G Ethernet, 1310 nm, 20 km, LX 3.072/2.4/1.2 Gbps, 614 Mbps CPRI; 3.072/1.5 Gbps, 768 Mbps OBSAI	CSFP-4G-3-2
SFP+ 8/4/2 G Fibre Channel, 6/4.9 Gbps CPRI 850 nm mm multirate 4.9/3.072/2.4 Gbps CPRI and 6/3.072 Gbps OBSAI	CSFPPLUS-8G-8-1
SFP+ 8/4/2 G Fibre Channel, 6/4.9 Gbps CPRI 1310 nm SM, 10 km 4.9/3.072/2.4 Gbps CPRI and 6/3.072 Gbps OBSAI	CSFPPLUS-8G-3-1
SFP+ 1/10 G Ethernet, 1/10 G Fiber Channel 1310 nm SM 10 km 1000BASE-LX 1G and 10GBASE-LR/LW, 1/10 G Fibre Channel and 9.8 Gbps CPRI	SFPPLUS-1GE-10GE-3-1
SFP+ 1/10 G Ethernet 1310 nm SM 10 km 1000BASE-LX 1G and 10GBASE-LR/LW, 1/10 G Fibre Channel and 9.8 Gbps CPRI	SFPPLUS-1GE-10GE-3-1
Optional StrataSync™	
StrataSync asset management annual subscription for CellAdvisor RF analyzer	StrataSync-AM-CA-RFA-1YR
StrataSync test data management annual subscription for CellAdvisor RF analyzer ¹¹	StrataSync-TDMCA-RFA-1YR
Optional Warranty and Calibration	
Warranty extension of 1 year for Asia and North America	JD786B200
Warranty extension of 1 year for Latin America and EMEA	JD786B201
Calibration service for Asia and North America	JD786B250
Calibration service for Latin America and EMEA	JD786B251

1. Requires calibration kit.
2. Requires dual-port calibration kit.
3. Requires Option 001.
4. Requires SFP/SFP+ and optical cable.
5. Includes a pair of Bluetooth USB dongles with 5 dBi dipole antenna (JD70050006).
6. Recommend adding Option 010.
7. Recommend adding antennas G70005035x and/or G70005036x0.
8. Standard accessory that can be purchased separately.
9. Requires RF cable G700050530.
10. Requires RF cable G710050533.
11. Requires STRATASYNC-AM-CA-RFA-1YR.
12. Requires Option 008.



North America
Latin America
Asia Pacific
EMEA

Toll Free: 1 855 ASK-JDSU
Tel: +1 954 688 5660
Tel: +852 2892 0990
Tel: +49 7121 86 2222

(1 855 275-5378)
Fax: +1 954 345 4668
Fax: +852 2892 0770
Fax: +49 7121 86 1222