



CellAdvisor™

JD748B Signal Analyzer Specifications

Spectrum Analyzer (Standard)

Frequency		
Frequency range	100 kHz to 4 GHz	
Internal 10 MHz Frequency Reference		
Accuracy	±0.05 ppm + aging (0 to 50°C)	
Aging	±0.5 ppm/year	
Frequency Span		
Range	0 Hz (zero span) 10 Hz to 4 GHz	
Resolution	1 Hz	
Resolution Bandwidth (RBW)		
-3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence
Accuracy	±10% (nominal)	
Video Bandwidth (VBW)		
-3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence
Accuracy	±10% (nominal)	
Single Sideband (SSB) Phase Noise		
Fc 1 GHz, RBW 10 kHz, VBW 1 kHz, RMS detector		
Carrier Offset		
30 kHz	<-90 dBc/Hz (typical)	
100 kHz	<-95 dBc/Hz (typical)	
1 MHz	<-102 dBc/Hz (typical)	
Measurement Range		
DANL to +20 dBm		
Input attenuator range	0 to 50 dB, 5 dB steps	
Maximum Input Level		
Average continuous power	+20 dBm	
DC voltage	±50 VDC	

Spectrum Analyzer: 100 kHz to 4 GHz

Power Meter: 10 MHz to 4 GHz

Specification Conditions

JD748B specifications apply under these conditions:

- The instrument has been turned on for at least 15 minutes
- The instrument is operating within a valid calibration period
- Data with no tolerance are considered typical values
- Cable and antenna measurements apply after calibration to the OSL standard
- Typical and nominal values are defined as:
 - Typical: expected performance of the instrument operating at 20 to 30°C after being at this temperature for 15 minutes
 - Nominal: a general, descriptive term or parameter

Displayed Average Noise Level (DANL)	
1 Hz RBW, 1 Hz VBW, 50 Ω termination, 0 dB attenuation, RMS detector	
Preamplifier Off	
10 MHz to 2.3 GHz	-140 dBm (-146 dBm, typical)
>2.3 GHz to 3 GHz	-138 dBm (-144 dBm, typical)
>3 GHz to 4 GHz	-135 dBm (-140 dBm, typical)
Preamplifier On	
10 MHz to 2.3 GHz	-155 dBm (-160 dBm, typical)
>2.3 GHz to 3 GHz	-153 dBm (-158 dBm, typical)
>3 GHz to 4 GHz	-150 dBm (-156 dBm, typical)
Display Range	
Log scale and units (10 divisions displayed)	1 to 20 dB/division in 1 dB steps dBm, dBV, dBmV, dBμV
Linear scale and units (10 divisions displayed)	V, mV, mW, W
Detectors	Normal, positive peak, sample, negative peak, RMS
Number of traces	6
Trace functions	Clear/write, maximum hold, minimum hold, capture, load view on/off, trace math
Total Absolute Amplitude Accuracy	
Preamplifier off, power level >-50 dBm, auto-coupled (20 to 30°C)	
5 MHz to 4 GHz	±1.25 dB, ±0.5 dB (typical)
	Attenuation <40 dB
	±1.55 dB, ±1.0 dB (typical)
	Attenuation ≥40 dB
Reference Level	
Setting range	-120 to +100 dBm
Setting Resolution	
Log scale	0.1 dB
Linear scale	1% of reference level
Markers	
Marker types	Normal, delta, delta pair, noise, frequency count marker
Number of markers	6
Marker functions	Peak, next peak, peak left, peak right, minimum search marker to center/start/stop, always peak on/off
RF Input VSWR	
20 MHz to 4 GHz	1.5:1 (typical)
Second Harmonic Distortion	
Mixer level	-25 dBm
10 MHz to 1.3 GHz	<-65 dBc (typical)
>1.3 GHz to 4 GHz	<-70 dBc (typical)
Third-Order Inter-Modulation (third-order intercept: TOI)	
200 MHz to 2 GHz	+10 dBm (typical)
>2 GHz to 4 GHz	+12 dBm (typical)

Spurious	
Inherent residual response	
Input terminated, 0 dB attenuation, preamplifier off, RBW at 10 kHz, Sweep mode	
20 MHz to 3 GHz	-90 dBm (nominal)
>3 GHz to 4 GHz	-85 dBm (nominal)
Exceptions	<-80 dBm at 311.94 MHz <-84 dBm at 415.92 MHz <-85 dBm at 519.90, 1599.00, and 2497.80 MHz
Input-related spurious	<-70 dBc (nominal)
Dynamic Range	
2/3 (TOI-DANL) in 1 Hz RBW	>95 dB
Sweep Time	
Range	80 ms to 1000 s 24 μs to 200 s
	Span = 0 Hz (zero span)
Accuracy	±2%
	Span = 0 Hz (zero span)
Mode	Continuous, single
Gated Sweep	
Trigger source	External, video, and GPS
Gate length	1 μs to 100 ms
Gate delay	0 to 100 ms
Trigger	
Trigger source	Free run, video, external
Trigger Delay	
Range	0 to 200 s
Resolution	6 μs
Measurements*	
Channel power	
Occupied bandwidth	
Spectrum emission mask	
Adjacent channel power	
Spurious emissions	
Field strength	
AM/FM audio demodulation	
Route map	
PIM detection	
Dual spectrum	

* CW signal generator (Option 003) can be set up simultaneously.

RF Power Meter (standard)

General Parameters			
Display range	-100 to +100 dBm		
Offset range	0 to 60 dB		
Resolution	0.01 dB or 0.1 xW (x = m, u, p)		
Internal RF Power Sensor			
Frequency range	10 MHz to 4 GHz		
Span	1 kHz to 100 MHz		
Dynamic range	-120 to +20 dBm		
Maximum power	+20 dBm		
Accuracy	Same as spectrum analyzer		
External RF Power Sensors			
Directional	JD731B	JD733A	
Frequency range	300 MHz to 3.8 GHz	150 MHz to 3.5 GHz	
Dynamic range	0.15 to 150W (average) 4 to 400 W (peak)	0.1 to 50W (average) 0.1 to 50 W (peak)	
Connector type	Type-N female on both ends		
Measurement type	Forward/reverse average power, forward peak power, VSWR		
Accuracy	$\pm(4\% \text{ of reading} + 0.05 \text{ W})^{1,2}$		
Terminating	JD732B	JD734B	JD736B
Frequency range	20 MHz to 3.8 GHz		
Dynamic range	-30 to +20 dBm		
Connector type	Type-N male		
Measurement type	Average	Peak	Average and peak
Accuracy	$\pm 7\%^1$		


Optical Power Meter (standard)

Optical Power Meter		
Display range	-100 to +100 dBm	
Offset range	0 to 60 dB	
Resolution	0.01 dB or 0.1 mW	
External Optical Power Sensors		
	MP-60A	MP-80A
Wavelength range	780 to 1650 nm	
Max permitted input level	+10 dBm	+23 dBm
Connector input	Universal 2.5 and 1.25 mm	
Accuracy	$\pm 5\%$	

1. CW condition at 25°C $\pm 10^\circ\text{C}$
2. Forward power

2-Port Transmission Measurements (Option 001)

Frequency	
Frequency range	5 MHz to 4 GHz
Frequency resolution	10 kHz
Transmission uncertainty	

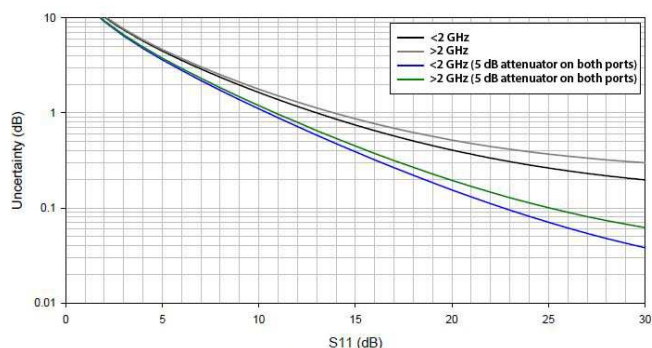

Use 5 dB attenuators on both ports to lessen uncertainty.

Output Power	
High	0 dBm (typical)
Low	-30 dBm (typical)
Dynamic Range	
Scalar	5 MHz to 4 GHz, > 100 dB
Measurements	
Insertion Loss/Gain	
Range	-120 to 100 dB
Resolution	0.01 dB

CW Signal Generator (Option 003)

Frequency	
Frequency range	25 MHz to 4 GHz
Frequency reference	±25 ppm Maximum
Frequency resolution	10 kHz
Output Power	
Range	0 dBm, -30 to -80 dBm
Step	1 dB
Accuracy	±1.5 dB (15 to 35°C)

GPS Receiver and Antenna (Option 010)

GPS Indicator		
Latitude, longitude, altitude		
High-Frequency Accuracy		
Spectrum, interference, and signal analyzer		
GPS lock	±25 ppb	
Hold over (for 3 days)	±50 ppb (0 to 50°C)	15 minutes after satellite locked
Connector	SMA, female	

Interference Analyzer (Option 011)

Measurements	
Spectrum analyzer	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
Spectrogram	Collect up to 72 hours of data
RSSI	Collect up to 72 hours of data
Interference finder	
Spectrum replayer	
Dual spectrogram	

Channel Scanner (Option 012)

Frequency Range	
10 MHz to 4 GHz	
Measurement Range	
110 to +20 dBm	
Measurements	
Channel scanner	1 to 20 channels
Frequency scanner	1 to 20 frequencies
Custom scanner	1 to 20 channels or frequencies

GSM/GPRS/EDGE Signal Analyzer (Options 022 and 042)

General Parameters		
Frequency range	450 MHz to 500 MHz 820 MHz to 965 MHz 1.705 GHz to 1.995 GHz	
Input signal range	-40 to +20 dBm	
Burst power	±1.0 dB	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
GMSK modulation quality		
Phase RMS Accuracy		
Residual error	±1.0 degrees	(0 < Phase RMS < 8)
Phase peak accuracy	0.7 degrees (typical)	
8 PSK modulation quality	±2.0 degrees	(0 < Phase peak < 30)
EVM Accuracy		
Residual error	±1.5%	(2% < EVM < 8%)
RF power vs. time	2.5%	
	±0.25 symbol	

Measurements

Option 022					
Channel Power	Spectrum Emission mask	Power vs. Time (slot)	Frequency error	Auto Measure	Phase error RMS
Channel power	Reference power	Burst power	Phase error RMS	Channel power	Phase error peak
Spectral density	Peak level at defined range	Max/min point	Phase error peak	Occupied bandwidth	EVM RMS*
Peak to average power		Power vs. Time (frame)	I/Q origin offset*	Spectrum emission mask	EVM Peak*
Occupied Bandwidth	Spurious Emissions	Frame average power	TSC	Spurious emission mask	I/Q origin offset
Occupied bandwidth	Peak frequency at defined range	Burst power (Slot 0 to 7)	BSIC	Burst power	C/I*
Integrated power		TSC (Slot 0 to 7)	C/I*	PvsT – Mask	
Occupied power	Peak level at defined range	Constellation	EVM RMS*	Frame average power	
		Burst power	EVM Peak*	Frequency error	
		Modulation type	EVM 95th*		

Option 042					
Channel/Frequency Scanner		Multipath Profile	Modulation Analyzer	Frame average power	Burst power
	Group (traffic, control)	(10 strongest)	Frame avg power trend	BSIC, frame no. and time	Modulation type
	BSIC (NCC, BCC)				
Channels or frequencies		Frame average power	C/I trend	C/I, frequency error	
Absolute power		SNR, delay			

Longitude, latitude, and satellite in all screens

* Measurements performed for 8PSK modulation signals (edge) only.

WCDMA/HSPA+ Signal Analyzer (Options 023 and 043)

General Parameters		
Frequency range	Band 1 to 14, 19 to 22, 25, 26	
Input signal range	-40 to +20 dBm	
RF channel power accuracy	±1.0 dB, ±0.7 dB (typical)	
Occupied bandwidth accuracy	±100 kHz	
Adjacent channel leakage ratio (ACLR)	<-56 dB, ±0.7 dB at 5 MHz offset, <-58 dB, ±0.8 dB at 10 MHz offset	
WCDMA modulation	QPSK	
HSPA+ modulations	QPSK, 16 QAM, 64 QAM	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
EVM accuracy	±2.0%	2% ≤ EVM ≤ 20%
Residual EVM	2.5% (typical)	
Code domain power	±0.5 dB relative power ±1.5 dB absolute power	Code channel power >-25 dB Code channel power >-25 dB
CPICH power accuracy	±0.8 dB (typical)	

Measurements

Option 023

Channel Power	ACLR	Constellation	Max, avg active power	Codogram	Auto Measure
Channel power	Reference power	CPICH power	Max, avg inactive power	Code utilization	Channel power
Spectral density	Abs power at defined range	Rho, EVM	Scramble code	RCSI	Occupied bandwidth
Peak to average power		Peak CDE	Relative Code Domain Error		CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH
Occupied Bandwidth	Rel power at defined range	Frequency error		Abs/Rel code power	CDP Table
Occupied bandwidth		Time offset	Code error		
Integrated power	Multi-ACLR	Carrier feed-through		Individual code	Code utilization
Occupied power	Lowest reference power	Scramble code	EVM, RCDE, and its constellation		Code, spreading factor
Spectrum Emission Mask	Highest reference power	Code Domain Power		Channel power	Allocation (channel type)
Reference power	Abs power at defined range	Abs/Rel code power	Power bar graph (Abs/Rel/Delta power)		EVM, modulation type
Peak level at defined range	Rel power at defined range	Individual code EVM and its constellation		CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	
		Channel power	Avg RCDE QPSK, 16 QAM, 64 QAM		CPICH absolute power
	Spurious Emissions	Power bar graph (Abs/Rel/Delta power)		CPICH, P-CCPCH, S-CCPCH	
	Peak frequency at defined range	CPICH, P-CCPCH, S-CCPCH	PICH, P-SCH, S-SCH		
	Peak level at defined range	PICH, P-SCH, S-SCH			

Option 043

Channel Scanner (up to 6)	Scramble Scanner (up to 6)	Multipath Profile	Code Domain Power	Max, avg active power	Amplifier capacity
		Channel, multipath power	Abs/Rel code power	Max, avg inactive power	Peak amplifier capacity
Frequencies or channels	Channel power	Ec/Io, delay	Individual code EVM	Frequency error	Average amplifier capacity
Channel power, scramble code, CPICH power, Ec/Io	CPICH dominance		Channel power	Time offset, Rho	Capacity
	Scramble code		Scramble code	Carrier feed-through	Code, peak utilization
	Ec/Io, CPICH power, delay		CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	(Composite) EVM	Average utilization
			CPICH EVM, P-CCPCH EVM		Route Map
					CPICH power, Ec/Io

Longitude, latitude, and satellite in all screens

cdmaOne/cdma2000® Signal Analyzer (Options 020 and 040)

General Parameters		
Frequency range	Band 0 to 10	
Input signal level	-40 to +20 dBm	
RF channel power accuracy	±1.0 dB (typical)	
CDMA compatibility	cdmaOne and cdma2000	
Frequency error	±10 Hz + ref freq accuracy	99% confidence level
Rho accuracy	±0.005	0.9 < Rho < 1.0
Residual Rho	>0.995 (typical)	
PN offset	1 x 64 chips	
Code domain power	±0.5 dB relative power ±1.5 dB absolute power	Code channel power >-25 dB Code channel power >-25 dB
Pilot power accuracy	±1.0 dB (typical)	
Time offset	±1.0 μs, ±0.5 μs (typical)	External trigger

Measurements

Option 020

Channel Power	ACPR	Spurious Emissions	Code Domain Power	RCSI	Auto Measure
Channel power	Reference power	Peak freq at defined range	Abs/Rel code power	Pilot, Paging, Sync, Q-Paging	Channel power
Spectral density	Abs power at defined range	Peak level at defined range	Channel power		Occupied bandwidth
Peak to average power		Constellation	Power bar graph (Abs/Rel)	CDP Table	Spectrum emission mask
Occupied Bandwidth	Rel power at defined range	Pilot power	Pilot, Paging, Sync, Q-Paging	Reference power	ACPR
Occupied bandwidth		Rho		Code utilization	Multi-ACPR
Integrated power	Multi-ACPR	EVM	Max, avg active power	Code, spreading factor	Rho
Occupied power	Lowest reference power	Frequency error	Max, avg inactive power	Allocation (channel type)	Frequency error
Spectrum Emission Mask	Highest reference power	Time offset	PN offset	Relative, absolute power	Time offset
Reference power	Abs power at defined range	Carrier feed-through	Codogram		Carrier feed-through
Peak level at defined range		PN offset	Code utilization		Pilot power
	Rel power at defined range				Max inactive power
					Power Statistics CCDF

Option 040

Channel Scanner (up to 6)	PN Scanner (up to 6)	Multipath Profile	Code Domain Power	Frequency error	Code utilization
	Channel power	Channel power	Abs/Rel code power	Time offset, Rho, EVM	Peak utilization
Frequencies or channels	Pilot dominance	Multipath power	Channel power	Carrier feed-through	Average utilization
Channel power, PN offset	PN offset	Ec/Io, delay	PN offset	Amplifier capacity	Route Map
Pilot power, Ec/Io	Ec/Io, pilot power, delay		Pilot, Paging, Sync, Q-Paging power	Peak amplifier capacity	Pilot power
				Average amplifier capacity	
			Max, avg active power		
			Max, avg inactive power		

Longitude, latitude, and satellite in all screens

EV-DO Signal Analyzer (Options 021 and 041)

General Parameters		
Frequency range	Band 0 to 10	
Input signal level	-40 to +20 dBm	
RF channel power accuracy	±1.0 dB (typical)	
EV-DO compatibility	Rev 0, Rev A and Rev B	
Frequency error	±10 Hz + ref freq accuracy	99% confidence level
Rho accuracy	±0.005	0.9 < Rho < 1.0
Residual Rho	>0.995 (typical)	
PN offset	1 x 64 chips	
Code domain power	±0.5 dB relative power ±1.5 dB absolute power	Code channel power >-25 dB Code channel power >-25 dB
Pilot power accuracy	±1.0 dB (typical)	
Time offset	±1.0 μs, ±0.5 μs (typical)	External trigger

Measurements

Option 021					
Channel Power	ACPR	Power vs. Time (idle and active slot)	Constellation (pilot, MAC 64/128, and data)	Code Domain Power (data)	Auto Measure
Channel power	Reference power	Slot average power	Channel power	Data channel power	Channel power
Spectral density	Abs power at defined range	On/off ratio	Rho, EVM, peak CDE	Slot average power	Occupied bandwidth
Peak to average power		Idle activity	Frequency error	Max, avg active power	ACPR
Occupied Bandwidth	Rel power at defined range	Pilot, MAC, data power	Time offset	Max, avg inactive power	Multi-ACPR
Integrated power	Multi-ACPR	Constellation (composite 64/128)	Carrier feed-through	PN offset	Pilot, MAC, data power
Occupied power	Lowest reference power		PN offset	MAC Codogram	On/off ratio
Spectrum Emission Mask	Highest reference power	Channel power	Modulation type*	Code utilization	PvsT mask (idle slot) or PvsT mask (active slot)
	Abs power at defined range	Rho, EVM, Peak CDE	Code Domain Power (pilot and MAC 64/128)	RCSI	Frequency error
Reference power	Rel power at defined range	Frequency error		Slot, pilot, MAC, data	Frequency error
Peak level at defined range	Rel power at defined range	Time offset	Pilot/MAC channel power	MAC CDP table	Time offset
		Carrier feed-through	Slot average power	Reference power	Carrier feed-through
	Spurious Emissions	PN offset	Max active I/Q power	Code utilization	Pilot, MAC, data Rho
	Peak frequency at defined range	Pilot, MAC, data power	Avg active I/Q power	Code, spreading factor	Max inactive I/Q power
		Pilot, MAC, data EVM	Max inactive I/Q power	Allocation (channel type)	PN offset
Peak level at defined range	Rel power at defined range		Avg inactive I/Q power	Relative, absolute power	Power Statistics CCDF
			PN offset		

Option 041					
Channel scanner (up to 6)	PN Scanner (up to 6)	Multipath Profile	Code Domain Power	Frequency error	Peak utilization
	Channel power	Channel power	Slot average power	Time offset	Average utilization
Frequencies or channels	Pilot dominance	Multipath power	PN offset	Carrier feed-through	Route Map
PN offset	PN offset	Ec/Io, delay	Pilot, MAC, data power	Max active I/Q power	Pilot power
Pilot, MAC, data power	Ec/Io, pilot power, delay		Pilot, MAC, data Rho	Avg active I/Q power	Ec/Io
			(Composite) EVM	Code utilization	

Longitude, latitude, and satellite in all screens

*Measurement is performed in Data Constellation only.

TD-SCDMA Signal Analyzer (Options 025 and 045)

General Parameters		
Frequency range	1.785 GHz to 2.22 GHz	
Input signal level	-40 to +25 dBm	
Channel power (RRC) accuracy	±1.0 dB (typical)	
Modulations	QPSK, 8 PSK, 16 QAM, 64 QAM	
Frequency error	±10 Hz + ref freq accuracy	99% confidence level
Residual EVM (RMS)	2.0% (typical)	P-CCPCH slot and 1 channel
Time error (Tau)	±1.0 µs (typical)	External trigger
Spreading factor	Auto (DL, UL), 1, 2, 4, 8, 16	

Measurements

Option 025

Channel Power	Multi-ACLR	Power vs. Time (frame)	Midamble Power	Code Error	Auto Measure
Channel power	Lowest reference power	Slot power	Slot power	Code power and error	Channel power
Spectral density	Highest reference power	(TS [0 to 6], DwPTS, UpPTS)	DwPTS power	Individual code EVM and its constellation	Occupied bandwidth
Peak to average power	Abs power at defined range	Data power left	Midamble power (1 to 16)		Spectrum emission mask
Occupied Bandwidth	Rel power at defined range	(TS [0 to 6], DwPTS, UpPTS)	Code Power	Data format	ACLR
Occupied bandwidth		Midamble Power	Abs/Rel code power	Slot, DwPTS power	Multi-ACLR
Integrated power		(TS [0 to 6], DwPTS, UpPTS)	Individual code EVM and its constellation	No. of active code	Slot power
Occupied power	Spurious Emissions	Data power right		Scramble code	DwPTS power
Spectrum Emission Mask	Peak frequency at defined range	(TS [0 to 6], DwPTS, UpPTS)	Data format	Max active code power	UpPTS power
Reference power	Peak level at defined range	Time offset	Slot power, DwPTS power	Avg active code power	On/off slot ratio
Peak level at defined range		(TS [0 to 6], DwPTS, UpPTS)	No. of active code	Max inactive code power	Frequency error
ACLR		Power vs. Time (mask)	Scramble code	Avg inactive code power	EVM RMS
Reference power	Power vs. Time (slot)	Slot power	Max active code power	Peak CDE and peak active CDE	Peak CDE
Abs power at defined range	Slot power	On/off slot ratio	Avg active code power		Max inactive power
	DwPTS power	Off power	Max inactive code power	Scramble code	
Rel power at defined range	UpPTS power	Timogram	Avg inactive code power		
	On/off slot ratio	Constellation			
	Slot PAR	Rho			
	DwPTS code	EVM RMS, EVM peak			
		Peak CDE			
		Frequency error			
		I/Q origin offset			
		Time offset			

Option 045

Sync-DLID Scanner (32)	Sync-DLID vs. Tau (up to 6)	Sync-DLID Multipath	Sync-DLID Analyzer	Pilot dominance	Route Map
Scramble code group		Ec/Io, Tau	DwPTS power, Ec/Io trend	EVM, frequency error	DwPTS Power
Ec/Io, Tau	ID, power, Ec/Io, Tau	DwPTS power	DwPTS power	Ec/Io, CINR	
DwPTS power	DwPTS power	Pilot dominance			
Pilot dominance	Pilot dominance				

Longitude, latitude, and satellite in all screens

Mobile WiMAX Signal Analyzer (Options 026 and 046)

General Parameters		
Frequency range	2.1 GHz to 2.7 GHz 3.4 GHz to 3.85 GHz	
Input signal level	-40 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidth	7 MHz, 8.75 MHz, and 10 MHz	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
Residual EVM (RMS)	1.5% (typical)	

Measurements

Option 026

Channel Power	Spurious Emissions	Constellation	EVM vs. Subcarrier	Auto Measure	Time offset
Channel power	Peak frequency at defined range	Channel power	RCE RMS, RCE peak	Channel power	I/Q origin offset
Spectral density		RCE RMS, RCE peak	EVM RMS, EVM peak	Occupied bandwidth	Spectral flatness
Peak to average power	Peak level at defined range	EVM RMS, EVM peak	Segment ID, cell ID	Spectrum emission mask	Frequency error
Occupied Bandwidth	Power vs. Time (frame)	Frequency error	Preamble index	Spurious emission mask	RCE RMS
Occupied bandwidth	Channel power	Time offset	EVM vs. Symbol	Preamble power	RCE peak
Integrated power	Frame average power	Segment ID, cell ID	RCE RMS, RCE peak	DL burst power	EVM RMS
Occupied power	Preamble power	Preamble index	EVM RMS, EVM peak	UL burst power	EVM peak
Spectrum Emission Mask	DL burst power	Spectral Flatness	Segment ID, cell ID	Frame average power	Power Statistics CCDF
Reference power	UL burst power	Average subcarrier power	Preamble index		
Peak level at defined range	I/Q origin offset	Subcarrier power variation			
	Time offset				
		Max, min, avg power			

Option 046

Preamble Scanner (up to 6)	Multipath Profile	Preamble Power Trend	Frame avg power	Preamble	Route Map
	Total preamble power	Total preamble power	Relative power trend	Relative power	Cell ID, sector ID
Total preamble power	Multipath power	Preamble power	C/I	Time offset	
Preamble, relative power	Relative power, delay				
Cell ID, sector ID	Preamble power trend				
Time offset					

Longitude, latitude, and satellite in all screens

LTE/LTE-Advanced—FDD Signal Analyzer (Options 028/030 and 048)

General Parameters		
Frequency range	Band 1 to 14, 17 to 26	
Input signal level	-40 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidths	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
Residual EVM (RMS)	2.0% (typical)	Data EVM

Measurements

Option 028/030					
Channel Power	Power vs. Time (frame)	Control Channel	Data EVM RMS, peak	Antenna 1 RS power and EVM	PDSCH/Data* 64 QAM EVM
Channel power	Frame average power	Control channel summary (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*)	RS EVM RMS, peak	Antenna 2 RS power and EVM**	Data EVM RMS, peak
Spectral density	Subframe power		Cell, group, sector ID		Antenna 3 RS power and EVM**
Peak to average power	First slot power		Frame	Antenna 3 RS power and EVM**	
Occupied Bandwidth	Second slot power		MBSFN*		Antenna 3 RS power and EVM**
Occupied bandwidth	Cell ID, I/Q origin offset	EVM, relative or absolute power, modulation type	Frame summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* QPSK, PDSCH/Data* 16 QAM, PDSCH/Data* 64 QAM)	Data Allocation Map	
Integrated power	Time offset	Each control channels'	EVM, relative or absolute power, modulation type	Data allocation vs frame	OFDM power
Occupied power	Constellation			I/Q diagram	Resource block power
Spectrum Emission Mask	MBSFN*	Modulation format	QAM, PDSCH/Data* 64 QAM)	OFDM symbol power	I/Q origin offset
Reference power	PDSCH/Data* QPSK EVM	Frequency error	EVM, relative or absolute power, modulation type	Data utilization	Carrier Aggregation**
Peak level at defined range	PDSCH/Data* 16 QAM EVM	I/Q origin offset	EVM, relative or absolute power, modulation type	Data allocation vs subframe	Component carriers: up to 5
ACLR	PDSCH/Data* 64 QAM EVM	EVM RMS, EVM peak	Subframe	Resource block power	Subframe power
Reference power	Data EVM RMS	Subframe	Frame average power	Data utilization	Subframe power
Abs power at defined range	Data EVM peak	MBSFN*	OFDM symbol power	Auto Measure	P-SS, S-SS, PBCH, RS power and EVM
	Frequency error	Subframe summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* QPSK, PDSCH/Data* 16 QAM, PDSCH/Data* 64 QAM)	Frequency error	Channel power	
Rel power at defined range	Time error	Subframe summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* QPSK, PDSCH/Data* 16 QAM, PDSCH/Data* 64 QAM)	I/Q origin offset	Occupied bandwidth	PDSCH/Data* QPSK power and EVM
Multi-ACLR	Data Channel		EVM RMS, peak	EVM RMS, peak	Spectrum emission mask
Lowest reference power	MBSFN*	QPSK, PDSCH/Data* 16 QAM, PDSCH/Data* 64 QAM)	Data EVM RMS, peak	ACLR	PDSCH/Data* 16 QAM power and EVM
Highest reference power	Resource block power		Cell, group, sector ID	Cell, group, sector ID	Multi-ACLR
Abs power at defined range	I/Q diagram	EVM, relative or absolute power, modulation type	Time Alignment Error	Spurious emission mask	PDSCH/Data* 64 QAM power and EVM
	RB power		Time alignment error trend	Frame average power	
Rel power at defined range	Modulation format	Subframe power	Time alignment error	Time alignment error	Cell ID
Spurious Emissions	I/Q origin offset	OFDM symbol power	Time alignment error	Frequency error	Frequency error
Peak frequency at defined range	EVM RMS, EVM peak	Frequency, time error	RS power difference	MBSFN*	Time alignment error
			Antenna 0 RS power and EVM	PDSCH/Data* QPSK EVM	Antenna port
Peak level at defined range				PDSCH/Data* 16 QAM EVM	Power Statistics CCDF

Option 048

Channel Scanner (up to 6)	ID Scanner (up to 6)	Multipath Profile	Control channel table	PMCH subframe power*	Route Map
Frequency or channels	RSRP/RSRQ dominance	Cell, group, sector ID	(P-SS, S-SS, PBCH, PCFICH, RS 0, RS 1, RS 2**, RS 3**, MBSFN RS*)	Time alignment error	RSRP
Cell, group, sector ID	S-SS RSSI dominance	Ant 0 RS Ec/Io, delay		Time offset	RSRQ
Channel power	S-SS Ec/Io dominance	Ant 1 RS Ec/Io, delay		Datagram	RS-SINR
RSRP/RSRQ	Cell, group, sector ID	Ant 2 RS Ec/Io**, delay**	Absolute power	Datagram	S-SS RSSI
RS-SINR	RSRP/RSRQ	Ant 3 RS Ec/Io**, delay**	Relative power	Resource block power	P-SS/S-SS Power
Antenna port	RS-SINR/S-SS RSSI	Control Channel	EVM RSM, phase	Data utilization	S-SS Ec/Io
	P-SS/S-SS Power	RS power trend	Frequency error		
	S-SS Ec/Io	Cell, group, sector ID			

Longitude, latitude, and satellite in all screens

*Measurement is performed when MBMS is enabled.

**Measurement is performed when option 030 is enabled.

LTE/LTE-Advanced—TDD Signal Analyzer (Options 029/031 and 049)

General Parameters		
Frequency range	Band 33 to 43	
Input signal level	-40 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidth	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
Residual EVM (RMS)	2.0% (typical)	Data EVM

Measurements

Option 029/031					
Channel Power	Spurious Emissions	Data EVM peak	Subframe	Antenna 3 RS power and EVM**	PDSCH/Data* 64 QAM EVM
Channel power	Peak frequency at defined range	Frequency error	MBSFN*		
Spectral density		Time error	Subframe summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* 16 QPSK, PDSCH/Data* 64 QAM)	Cell, group, sector ID	Data EVM RMS, peak
Peak to average power	Peak level at defined range	Data Channel		Data Allocation Map	RS, P-SS, S-SS EVM
Occupied Bandwidth		MBSFN*		Data allocation vs frame	RS, P-SS, S-SS power
Occupied bandwidth	Power vs. Time (frame)	Resource block power		Resource block power	PBCH power
Integrated power	Frame average power	I/Q diagram		OFDM symbol power	Subframe power
Occupied power	Subframe power	RB power		Data utilization	OFDM power
Spectrum Emission Mask	First slot power	Modulation format	EVM, relative or absolute power, modulation type	Data allocation vs subframe	Time error
Reference power	Second slot power	I/Q origin offset			I/Q origin offset
Peak level at defined range	Cell ID, I/Q origin offset	EVM RMS, EVM peak	Subframe power	Resource block power	Carrier Aggregation**
	Time offset	Control Channel	OFDM symbol power	Data utilization	Component carriers: up to 5
ACLR	Power vs. Time (slot)	Control channel summary (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*)	Frequency, time error	Auto Measure	
Reference power	Slot average power		Data EVM RMS, peak	Channel power	Subframe power
Abs power at defined range	Transient period length		RS EVM RMS, peak	Occupied bandwidth	P-SS, S-SS, PBCH, RS power and EVM
	Off power		Cell, group, sector ID	Spectrum emission mask	
Rel power at defined range	Constellation	EVM, relative or absolute power, modulation type	Time Alignment Error	ACLR	PDSCH/Data* QPSK power and EVM
	MBSFN*		Time alignment error trend	Multi-ACLR	
Multi-ACLR	RSTX power	Each control channels'	Time alignment error	Spurious emission mask	PDSCH/Data* 16 QAM power and EVM
Lowest reference power	PDSCH/Data* QPSK EVM	I/Q diagram	RS power difference	Slot average power	
Highest reference power	PDSCH/Data* 16 QAM EVM	Modulation format	Antenna 0 RS power and EVM	Off power	PDSCH/Data* 64 QAM power and EVM
Abs power at defined range		Frequency error		Transition period	
	PDSCH/Data* 64 QAM EVM	I/Q origin offset	Antenna 1 RS power and EVM	Time alignment error	Cell ID
Rel power at defined range		EVM RMS, EVM peak		MBSFN*	Frequency error
	Data EVM RMS		Antenna 2 RS power and EVM**	PDSCH/Data* QPSK EVM	Time alignment error
				PDSCH/Data* 16 QAM EVM	Antenna port
					Power Statistics CCDF

Option 049					
Channel Scanner (up to 6)	ID Scanner (up to 6)	Multipath Profile	Control Channel	EVM RSM, phase	Route Map
	RSRP/RSRQ dominance	Cell, group, sector ID	RS power trend	Frequency error	RSRP
Frequency or channels	S-SS RSSI dominance	Ant 0 RS Ec/Io, delay	Cell, group, sector ID	PMCH subframe power*	RSRQ
Cell, group, sector ID	S-SS Ec/Io dominance	Ant 1 RS Ec/Io, delay	Control channel table (P-SS, S-SS, PBCH, PCFICH, RS 0, RS 1, RS 2**, RS 3**, MBSFN RS*)	Time alignment error	RS-SINR
Channel power	Cell, group, sector ID	Ant 2 RS Ec/Io**, delay**		Time offset	S-SS RSSI
RSRP/RSRQ	RSRP/RSRQ	Ant 3 RS Ec/Io**, delay**		Datagram	P-SS, S-SS power
RS-SINR	RS-SINR/S-SS RSSI			Datagram	S-SS Ec/Io
Antenna port	P-SS/S-SS power		Absolute power	Resource block power	
	S-SS Ec/Io		Relative power	Data utilization	

Longitude, latitude, and satellite in all screens

*Measurement is performed when MBMS is enabled.

**Measurement is performed when option 031 is enabled.

RFoCPRI/Interference Analyzer (Option 008, 060, 061, 062, 063, 064, and 065)

General Parameters					
Optical interface		Dual SFP/SFP+ (supports all MSA compliant SFP modules)			
Line rates		614.4 Mbps (1x), 1228.8 Mbps (2x)		Option 008 and 060	
		2457.6 Mbps (4x)		Option 008 and 061	
		3072.0 Mbps (5x)		Option 008 and 062	
		4915.2 Mbps (8x)		Option 008 and 063	
		6144.0 Mbps (10x)		Option 008 and 064	
		9830.4 Mbps (16x)		Option 008 and 065	
Resolution Bandwidth (RBW)					
-3 dB bandwidth		1 kHz to 10 kHz (span ≤ 3.84 MHz) 1 KHz to 100 kHz (3.84 MHz < span < 30.86 MHz)		1-3-10 sequence	
Accuracy		±10% (nominal)			
VBW					
-3 dB bandwidth		1 Hz to 100 KHz		1-3-10 sequence	
Accuracy		±10% (nominal)			
CPRI Parameter					
IQ Sample width		4 – 20 (step 1)			
Mapping method		1 and 3			
TX clock		Internal/external/recovered			
Port type		Master/slave			
Map position		AxC#0 – AxC#7			
Bandwidth		1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
Measurements					
Layer-2 Monitoring		Layer-2 Term		Interference Analyzer	
Port 1	Port 2	Port 1 or 2 (exclusive)		Spectrum	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
LOS	LOS	LOS	SDI		
LOF	LOF	LOF	RAI		
SDI	SDI	Optic RX level	dBm	Spectrogram	Collect up to 72 hr of data
RAI	RAI	Protocol version	1 to 10		
Optic RX level	Optic RX level	C and M HDLC rate (kbps)	No HDLC, 240, 480, 960, 1920, 2400	RSSI	Collect up to 72 hr of data
SFP Information	SFP Information	C and M Ethernet subchannel number	20 to 63	Spectrum replay	X1, x2, x4, x8
Wavelength	Wavelength			PIM Detection	
Vendor	Vendor				Single carrier
Vendor PN	Vendor PN	Alarm Injection			Multi carrier
Vendor rev	Vendor rev	R-LOS	Single	PIM calculator	
Power level type	Power level type	R-LOF	Single		
Diagnostic byte	Diagnostic byte	Error Injection			
Nominal rate	Nominal rate	Code	Single/rate		
Min rate	Min rate	K30.7	Single/rate		
Max RX level	Max RX level	Error rate	1E-3 to 1E-9		
Max TX level	Max TX level				

Bluetooth Connectivity (Option 013)

Personal area network (PAN)
File transfer profile (FTP)

General Information

Inputs and Outputs		
RF In		
Connector	Spectrum analyzer	
Impedance	Type-N, female	
Damage level	50 Ω (nominal)	
	>+40 dBm, ±50V DC (nominal)	
RF Out		
Connector	Type-N, female	
Impedance	50 Ω (nominal)	
Damage level	>+37 dBm, ±50V DC (nominal)	
External Trigger, GPS		
Connector	SMA, female	
Impedance	50 Ω (nominal)	
External Ref		
Connector	SMA, female	
Impedance	50 Ω (nominal)	
Input frequency	10 MHz, 13 MHz, 15 MHz	
Input range	-5 to +5 dBm	
USB		
USB host ¹	Type A, 1 port	
USB client ²	Type B, 1 port	
SFP Cage		
Port 1	RFoFiber (with option 008)	
Port 2	SFP/SFP+ compatible	
LAN	RJ45, 10/100Base-T	
Audio jack	3.5 mm headphone jack	
External power	5.5 mm barrel connector	
Speaker	Built-in speaker	
Display		
Type	Resistive touch screen	
Size	8 inch, LED backlight, transfective LCD with anti-glare coating	
Power		
External DC input	18 to 19V DC	
Power consumption	42W	54W maximum (when charging battery)

Battery		
Type	10.8V, 7800 mA/hr (Lithium ion)	
Operating time	>3 hr (typical at spectrum analyzer)	
Charge time	3 hr (while not operating) 9 hr (while operating)	
Charging temperature	0 to 45°C (32 to 104°F) ≤85% RH	
Discharging temperature	-20 to 55°C (4 to 131°F) ≤85% RH	
Storage temperature ³	0 to 25°C (32 to 77°F)	
Data Storage		
Internal ⁴	Maximum 512 MB	
External ⁵	Limited by size of USB flash drive	
Environmental		
Operating Temperature		
AC power	0 to 40°C (32 to 104°F) with no derating	
Battery	0 to 40°C (32 to 104°F) at charging -10 to 55°C (14 to 131°F) at discharging -10 to 50°C (14 to 122°F) at discharging with Option 008	
Maximum humidity	95% RH (noncondensing)	
Shock and vibration	MIL-PRF-28800F class 2	
Storage temperature ⁶	-30 to 71°C (-22 to 160°F)	
EMC		
IEC/EN 61326-1:2013 (complies with European EMC)		
CISPR11:2009+A1:2010		
ESD		
IEC/EN 61000-4-2		
Size and Weight (standard configuration)		
Weight (with battery)	Standard	3.77 kg (8.31 lb)
	Full loaded	4.34 kg (9.57 lb)
Size (W x H x D)	295 x 195 x 82 mm	
Warranty		
2 years		
Calibration Cycle		
1 year		

1. Connects flash drive, power sensor, EZ-Cal kit, and fiber microscope.
2. Connects to PC for data transfer.
3. 20 to 85% RH, store battery pack in low-humidity environment; extended exposure to temperature above 45°C could significantly degrade battery performance and life.
4. Up to 3800 traces.
5. Supports USB 2.0 compatible memory devices.
6. With the battery pack removed.

Ordering Information

Description	Part Number
Standard CellAdvisor Base Station Analyzer	
100 kHz to 4 GHz spectrum analyzer 10 MHz to 4 GHz RF power meter (internal mode)	JD748B
Options	
NOTE: Upgrade options for the JD748B use the designation JD748BU before the respective last three-digit option number.	
2 port transmission measurements ¹	JD748B001
CW signal generator ¹	JD748B003
Signal generator hardware	JD748B007
Optical hardware ²	JD748B008
20 MHz demodulation hardware ³	JD748B009
GPS receiver and antenna	JD748B010
interference analyzer ^{5,6}	JD748B011
Channel scanner	JD748B012
Bluetooth connectivity ⁴	JD748B013
cdmaOne/cdma2000 Analyzer	JD748B020
EV-DO analyzer ⁷	JD748B021
GSM/GPRS/EDGE analyzer	JD748B022
WCDMA/HSPA+ analyzer	JD748B023
TD-SCDMA analyzer	JD748B025
Mobile WiMAX analyzer	JD748B026
LTE - FDD analyzer	JD748B028
LTE - TDD analyzer	JD748B029
LTE Advanced - FDD analyzer ⁸	JD748B030
LTE Advanced - TDD analyzer ⁹	JD748B031
cdmaOne/cdma2000 OTA analyzer ^{6,10}	JD748B040
EV-DO OTA analyzer ^{6,10}	JD748B041
GSM/GPRS/EDGE OTA analyzer ^{6,10}	JD748B042
WCDMA/HSPA+ OTA analyzer ^{6,10}	JD748B043
TD-SCDMA OTA analyzer ^{6,10}	JD748B045
Mobile WiMAX OTA analyzer ^{6,10}	JD748B046
LTE - FDD OTA analyzer ^{6,10}	JD748B048
LTE - TDD OTA analyzer ^{6,10}	JD748B049
RFoCPRI 614 Mbps and 1.2 Gbps interference analyzer ¹¹	JD748B060
RFoCPRI 2.4 Gbps interference analyzer ¹¹	JD748B061
RFoCPRI 3.1 Gbps interference analyzer ¹¹	JD748B062
RFoCPRI 4.9 Gbps interference analyzer ¹¹	JD748B063
RFoCPRI 6.1 Gbps interference analyzer ¹¹	JD748B064
RFoCPRI 9.8 Gbps interference analyzer ¹¹	JD748B065
Standard Accessories (can be purchased separately)	
AC/DC power adapter ¹²	G700550326
Cross LAN cable (1.5 m) ¹²	G710550335
USB A to B cable (1.8 m) ¹²	GC73050515
>1 GB USB memory ¹²	GC72450518
Rechargeable lithium ion battery ¹²	G710550325
Automotive cigarette lighter 12 VDC adapter ¹²	G710550323
Stylus pen ¹²	G710550316

Description	Part Number
Optional RF Cable	
RF cable DC to 8 GHz Type-N(m) to Type-N(m), 1.0 m	G700050530
RF cable DC to 8 GHz Type-N(m) to Type-N(f), 1.5 m	G700050531
RF cable DC to 8 GHz Type-N(m) to Type-N(f), 3.0 m	G700050532
RF cable DC to 18 GHz Type-N(m) to SMA(m), 1.5 m	G710050533
RF cable DC to 18 GHz Type-N(m) to QMA(m), 1.5 m	G710050534
RF cable DC to 18 GHz Type-N(m) to SMB(m), 1.5 m	G710050535
RF cable DC to 6 GHz Type-N(m) to DIN(f), 1.5 m	G710050536
Phase-stable RF cable with grip DC to 6 GHz Type-N(m) to Type-N(f), 1.5 m	G700050540
Phase-stable RF cable with grip DC to 6 GHz Type-N(m) to DIN(f), 1.5 m	G700050541
Optional Omni Antennas	
RF omni antenna Type-N(m), 806 to 896 MHz	G700050353
RF omni antenna Type-N(m), 870 to 960 MHz	G700050354
RF omni antenna Type-N(m), 1710 to 2170 MHz	G700050355
RF omni antenna Type-N(m), 720 to 800 MHz	G700050356
RF omni antenna Type-N(m), 2300 to 2700 MHz	G700050357
Optional YAGI Antennas	
RF Yagi antenna Type-N(f), 1750 to 2390 MHz, 10.2 dBd ¹³	G700050363
RF Yagi antenna Type-N(f), 806 to 896 MHz, 10.2 dBd ¹³	G700050364
RF Yagi antenna Type-N(f), 866 to 960 MHz, 9.8 dBd ¹³	G700050365
RF Yagi antenna SMA(f), 700 to 4000 MHz, 1.85 dBd ¹⁴	G700050366
Optional YAGI Antennas	
Directional power sensor, peak and average power 300 to 3800 MHz	JD731B
Terminating power sensor, average power 20 to 3800 MHz	JD732B
Directional power sensor, peak and average power 150 to 3500 MHz	JD733A
Terminating power sensor, peak power 20 to 3800 MHz	JD734B
Terminating power sensor, dual (average/peak) power 20 to 3800 MHz	JD736B

- Requires Option 007.
- Requires SFP/SFP+ and optical cable.
- Required for Options 020, 021, 022, 023, 025, 026, 028, 029, 030, 031, 040, 041, 042, 043, 045, 046, 048, 049.
- Includes a pair of Bluetooth USB dongles with 5 dBi dipole antenna (JD70050006).
- Recommend adding Option 010.
- Recommend adding antennas G70005035x and/or G70005036x0.
- Requires Option 020.
- Requires Option 028.
- Requires Option 029.
- Requires Option 010.
- Requires Option 008.
- Standard accessory that can be purchased separately.
- Requires RF cable G710050530.
- Requires RF cable G710050533.

Ordering Information (continued)

Description	Part Number
Optional Optical Power Meters and Fiber Microscope Kits	
USB optical power meter with software, 2.5 and 1.25 mm interfaces, 30-inch USB extender, and carrying pouch	MP-60A
USB optical power meter — high power with software, 2.5 and 1.25 mm interfaces, 30-inch USB extender, and carrying pouch	MP-80A
KIT: FBP-P5000i digital probe, FiberChekPRO software, case, and tips	FBP-SD101
KIT: FBP-P5000i digital probe, FiberChekPRO software, case, and tips	FBP-MTS-101
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters	FIT-SD103
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters, and cleaning materials	FIT-SD103-C
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters	FIT-SD113
Optional RF Adapters	
Adapter Type-N(m) to DIN(f), DC to 7.5 GHz, 50 Ω	G700050571
Adapter DIN(m) to DIN(m), DC to 7.5 GHz, 50 Ω	G700050572
Adapter Type-N(m) to SMA(f) DC to 18 GHz, 50 Ω	G700050573
Adapter Type-N(m) to BNC(f), DC to 4 GHz, 50 Ω	G700050574
Adapter Type-N(f) to Type-N(f), DC to 18 GHz 50 Ω	G700050575
Adapter Type-N(m) to DIN(m), DC to 7.5 GHz, 50 Ω	G700050576
Adapter Type-N(f) to DIN(f), DC to 7.5 GHz, 50 Ω	G700050577
Adapter Type-N(f) to DIN(m), DC to 7.5 GHz, 50 Ω	G700050578
Adapter DIN(f) to DIN(f), DC to 7.5 GHz, 50 Ω	G700050579
Adapter Type-N(m) to Type-N(m), DC to 11 GHz 50 Ω	G700050580
Adapter N(m) to QMA(f), DC to 6.0 GHz, 50 Ω	G700050581
Adapter N(m) to QMA(m), DC to 6.0 GHz, 50 Ω	G700050582
Optional Miscellaneous	
Soft carrying case	JD74050341
Hard carrying case	JD71050342
Hard carrying case with wheels	JD70050342
CellAdvisor backpack carrying case	JD70050343
External battery charger	G71050324
RF directional coupler, 700 to 4000 MHz, 30 dB, 50W input/output; Type-N(m) to Type-N(f), Tap Off; Type-N(f)	G710050585
RF combiner, 700 to 4000 MHz, Type-N(f) to Type-N(m) ¹	G710050586
4x1 RF combiner, 700 to 4000 MHz, Type-N(f) to Type-N(m) ²	G710050587
Attenuator 40 dB, 100 W, DC to 4 GHz (unidirectional)	G710050581
JD700B series user's guide - printed version	JD700B362
USB Bluetooth dongle and dipole antenna 5 dBi	JD70050006

Description	Part Number
Optional SFP Transceiver	
SFP 4/2/1 G Fibre Channel and 1 G Ethernet, 850 nm, 150 – 500 m, SX 3.072/2.4/1.2 Gbps, 614 Mbps CPRI; 3.072/1.5 Gbps, 768 Mbps OBSAI	CSFP-4G-8-1
SFP 4G/2G/1G Fibre Channel and 1 G Ethernet, 1310 nm, 5 km, LX 3.072/2.4/1.2 Gbps, 614 Mbps CPRI; 3.072/1.5 Gbps, 768 Mbps OBSAI	CSFP-4G-3-1
SFP 4G/2G/1G Fibre Channel and 1 G Ethernet, 1310 nm, 20 km, LX 3.072/2.4/1.2 Gbps, 614 Mbps CPRI; 3.072/1.5 Gbps, 768 Mbps OBSAI	CSFP-4G-3-2
SFP+ 8/4/2 G Fibre Channel, 6/4.9 Gbps CPRI 850 nm mm multirate 4.9/3.072/2.4 Gbps CPRI and 6/3.072 Gbps OBSAI	CSFPPLUS-8G-8-1
SFP+ 8/4/2 G Fibre Channel, 6/4.9 Gbps CPRI 1310 nm SM, 10 km 4.9/3.072/2.4 Gbps CPRI and 6/3.072 Gbps OBSAI	CSFPPLUS-8G-3-1
SFP+ 1/10 G Ethernet, 1/10 G Fiber Channel 1310 nm SM 10 km 1000BASE-LX 1G and 10GBASE-LR/LW, 1/10 G Fibre Channel and 9.8 Gbps CPRI	SFPPLUS-1GE-10GE-3-1
SFP+ 1/10 G Ethernet 1310 nm SM 10 km 1000BASE-LX 1G and 10GBASE-LR/LW, 1/10 G Fibre Channel and 9.8 Gbps CPRI	SFPPLUS-1GE-10GE-3-1
Optional StrataSync™	
StrataSync asset management annual subscription for CellAdvisor signal analyzer	StrataSync-AM-CA-SA-1YR
StrataSync test data management annual subscription for CellAdvisor signal analyzer ³	StrataSync-TDMCA-SA-1YR
Optional Warranty and Calibration	
Warranty extension of 1 year for Asia and North America	JD785B200
Warranty extension of 1 year for Latin America and EMEA	JD785B201
Calibration service for Asia and North America	JD785B250
Calibration service for Latin America and EMEA	JD785B251
Optional TAP	
Optical nTAP, three-channel, 50 μm, MM, LC, 50/50 split ratio	TO3-M5-LC-55-K
Optical nTAP, three-channel, 9 μm, SM, LC, 50/50 split ratio	TO3-SM-LC-55-K

1. Recommended for LTE testing.

2. Recommended for LTE-Advanced testing.

3. Requires STRATASYNC-AM-CA-SA-1YR.



North America
Latin America
Asia Pacific
EMEA

Toll Free: 1 855 ASK-JDSU
Tel: +1 954 688 5660
Tel: +852 2892 0990
Tel: +49 7121 86 2222

(1 855 275-5378)
Fax: +1 954 345 4668
Fax: +852 2892 0770
Fax: +49 7121 86 1222