

Roundness/Cylindricity Measurement System **ROUNDTEST RA-1600M**

Highest precision level in its class...

Form Measurement




Bulletin No. 2164



Mitutoyo

ROUNDTTEST RA-1600M

Highest precision level in its class...

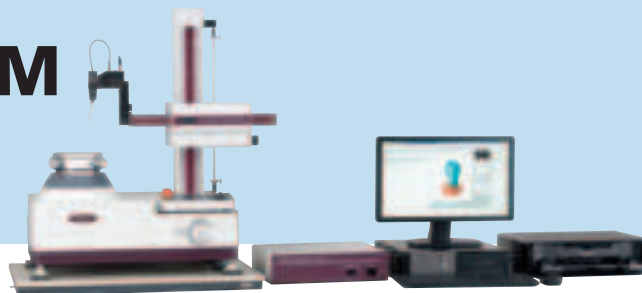


The main features of the RA-1600M are as follows:

- High rotational accuracy (0.03+6H/10000) μ m is maintained for an entry level to mid-range model.
- PC-based cylindricity capable Roundtest for both shop floor and laboratory environment.
- Simple easy to use center and level function with mechanical mic heads on alignment table.
- Accidental touch function disables the movement when the detector goes over range.



A wide variety of graphics functions

Analysis results such as cylindricity and coaxiality can be visually expressed in 3D graphics.

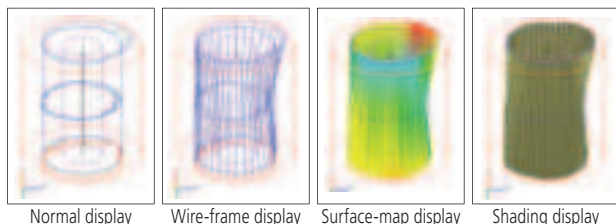


Customizable layouts using graphics and data obtained from measurements

The customer can create reports in custom formats by specifying how the analysis results will be displayed, as well as the sizes and positions of graphics. The analysis result window can be directly utilized as a layout window. Since the measurement procedure, including the layout information, is saved, the entire process, from measurement start, calculation, result saving, and finally to printing, can be automatically executed.

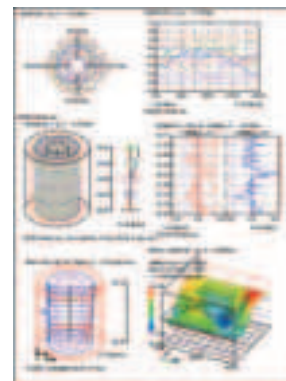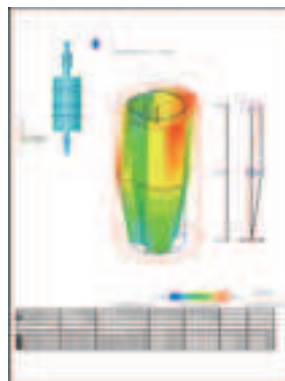

Highly accurate and easy-to use turntable

Equipped with highly accurate turntable that enables simple and Accurate centering and leveling of the workpiece. Operator can adjust centering and leveling by analog micrometer heads easily using misalignments guidance.

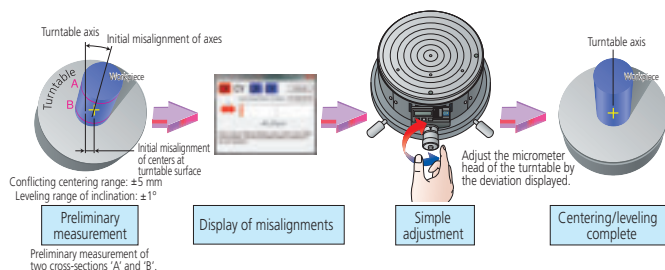

Mitutoyo America Corporation
www.mitutoyo.com

One Number to Serve You Better
1-888-MITUTOYO (1-888-648-8869)

Mitutoyo

M³ Solution Centers
Aurora, Illinois
(Corporate Headquarters)
Westford, Massachusetts
Huntersville, North Carolina
Mason, Ohio

Plymouth, Michigan
City of Industry, California
Birmingham, Alabama
Renton, Washington
Houston, Texas

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive.

Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of our products may require prior approval by an appropriate governing authority.

Trademarks and Registrations

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The appropriate companies should be contacted for more complete trademark and registration information.

Coordinate Measuring Machines	
Vision Measuring Systems	
Form Measurement	
Optical Measuring	
Sensor Systems	
Testing Equipment and Seismometer	
Digital Scale and DRO Systems	
Small Tool Instruments and Data Management	