



# CTE8000 / CTU8000 Series

## OEM pressure transmitters for industrial media

### COMMON PERFORMANCE CHARACTERISTICS

( $V_S=15\text{ V} \pm 0.1\text{ V}$ ,  $T_A=25\text{ }^\circ\text{C}$ , RH=50 %)

Characteristics		Min.	Typ.	Max.	Unit
Thermal effects (0...70 °C) <sup>4</sup>	Offset	devices up to 1 bar/15 psi	±0.03	±0.06	%FSO/°C
		all others	±0.02	±0.04	
	Span		±0.02	±0.04	
Thermal effects (-25...0 °C, 70...85 °C) <sup>4</sup>	Offset		±0.03		%FSO
	Span		±0.03		
Non-linearity (BSL), hysteresis and repeatability <sup>5</sup>	CT...8N...		±0.2	±0.5	%FSO
	all others		±0.1	±0.3	
Long term stability <sup>6</sup>			±0.1	±0.3	ms
Output noise (0 < f < 1 kHz)			±0.1		
Response time (10 to 90 %)	devices up to 350 mbar/5 psi		35		ms
	all others		5		
D/A resolution				11	bit
Power supply rejection	Offset		±0.01		%FSO/V
	Span		±0.02		

### INDIVIDUAL PERFORMANCE CHARACTERISTICS

( $V_S=15\text{ V} \pm 0.1\text{ V}$ ,  $T_A=25\text{ }^\circ\text{C}$ , RH=50 %)

#### 0...10 V output ( $R_L > 100\text{ k}\Omega$ )

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	CT...8N...		5		V
	all others		0	0.1	
Full scale span <sup>7</sup>		9.9	10	10.1	$\Omega$
Output impedance				25	
Current consumption (no load)			4		mA

#### 0.5...4.5 V output ( $R_L > 100\text{ k}\Omega$ )

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	CT...8N...		2.5		V
	all others	0.45	0.5	0.55	
Full scale span <sup>7</sup>		3.95	4	4.05	$\Omega$
Output impedance				25	
Current consumption (no load)			4		mA

# CTE8000 / CTU8000 Series

## OEM pressure transmitters for industrial media

### INDIVIDUAL PERFORMANCE CHARACTERISTICS (cont.)

( $T_A=25\text{ }^\circ\text{C}$ , RH=50 %,  $V_S=15\text{ V} \pm 0.1\text{ V}$ )

#### 0...5 V output ( $R_L > 100\text{ k}\Omega$ )

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	CT...8N...		2.50		V
	all others		0	0.05	
Full scale span <sup>7</sup>		4.95	5.00	5.05	
Output impedance				25	$\Omega$
Current consumption (no load)			4		mA

#### 1...6 V output ( $R_L > 100\text{ k}\Omega$ )


Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	CT...8N...		3.50		V
	all others	0.95	1.00	1.05	
Full scale span <sup>7</sup>		4.95	5.00	5.05	
Output impedance				25	$\Omega$
Current consumption (no load)			4		mA

#### 4...20 mA output ( $R_L = 100\ \Omega$ )

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	CT...8N...		12.0		mA
	all others	3.9	4.0	4.1	
Full scale span <sup>7</sup>		15.9	16.0	16.1	
Power consumption ( $I_L = 20\text{ mA}$ )			250		mW

### LOAD LIMITATION


#### 4...20 mA output version

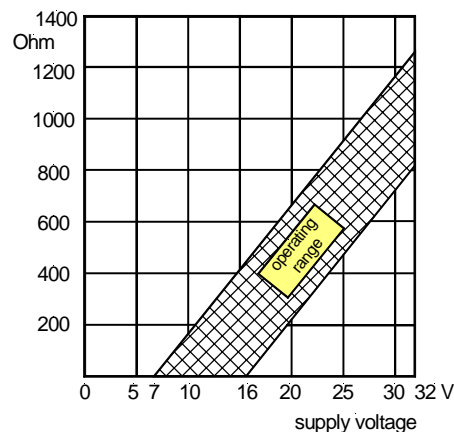

# CTE8000 / CTU8000 Series

## OEM pressure transmitters for industrial media

### OUTLINE DRAWING

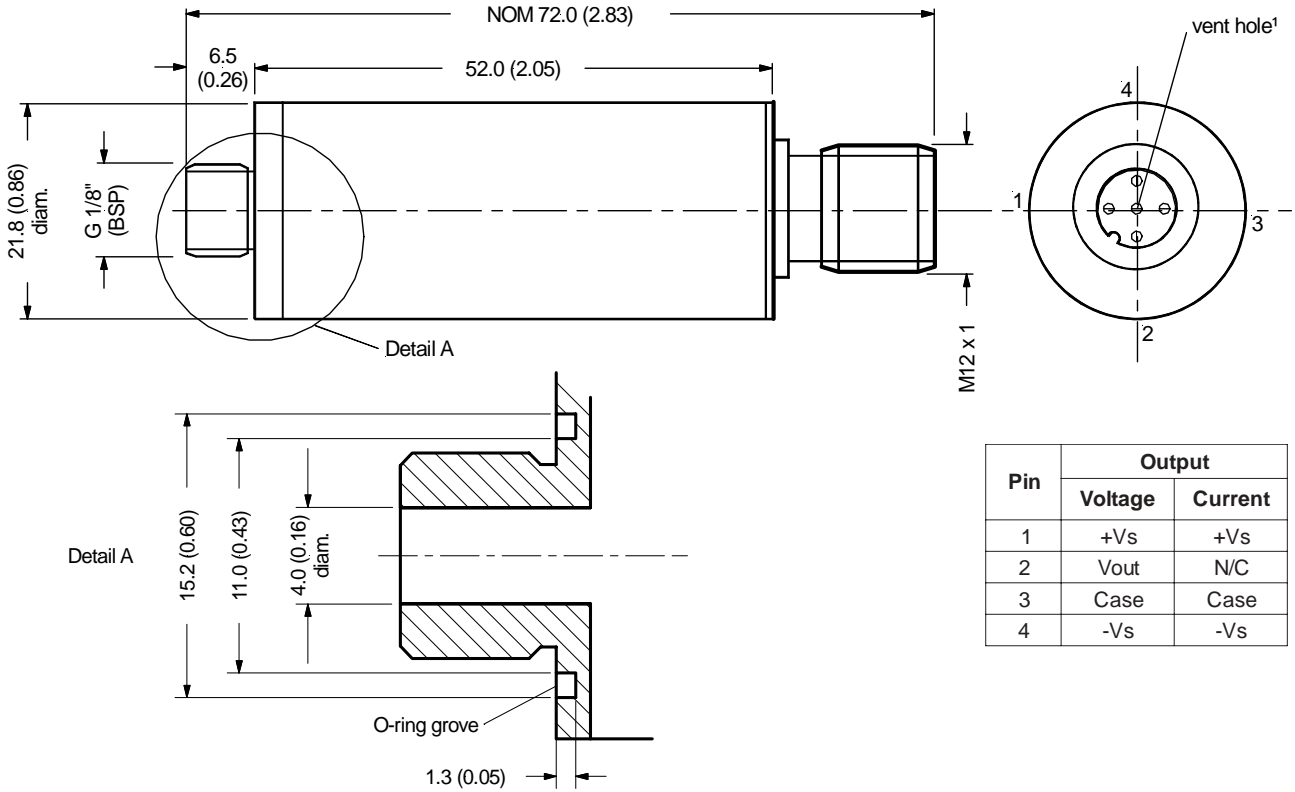

Pin	Output	
	Voltage	Current
1	+Vs	+Vs
2	Vout	N/C
3	Case	Case
4	-Vs	-Vs


mass: approx. 70 g

**Note: O-ring included in delivery**

dimensions in mm (inches)

### RECOMMENDED ACCESSORY (not included in delivery)

- ZP000112-B: Mating Connector** (without cable)
- ZK000101-x: Connector/cable assembly** (x=cable lengths in m, max. 10 m)

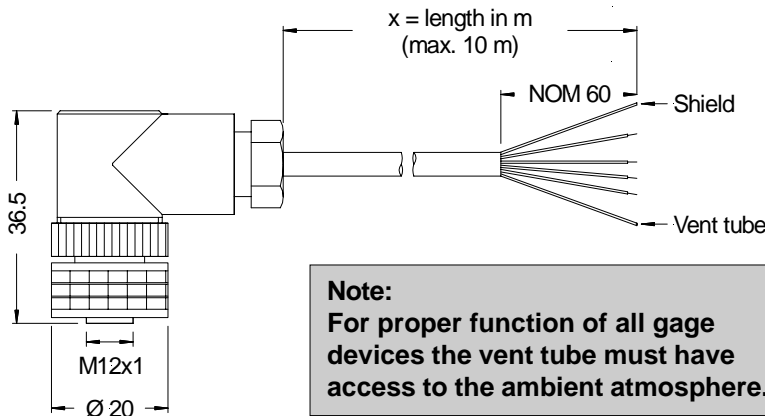

**Note:**  
For proper function of all gage devices the vent tube must have access to the ambient atmosphere.

PIN CONNECTION	
Pin	Flying lead end
1	Brown
2	Green
3	White and shield
4	Yellow


dimensions in mm

# CTE8000 / CTU8000 Series


## OEM pressure transmitters for industrial media

### OPTIONAL PRESSURE FITTINGS (brass, nickel plated)

**Male fittings**

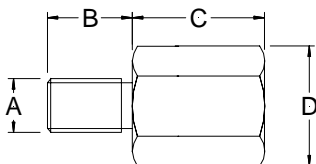

**Female fittings**



Dimensions in mm (inches)			
A	B	C	D (Hex.)
1/8" BSPT	8 (0.315)	13 (0.512)	14 (9/16")
1/4" BSPT	12 (0.472)	5.5 (0.217)	14 (9/16")
3/8" BSPT	11.5 (0.453)	5 (0.197)	17 (11/16")
1/2" BSPT	16 (0.630)	7 (0.276)	22 (7/8")
1/8" BSP	12.5 (0.492)	11 (0.433)	14 (9/16")
1/4" BSP	8.5 (0.335)	5 (0.197)	19 (3/4")
3/8" BSP	12.5 (0.492)	7 (0.276)	22 (7/8")
1/8" NPT	10 (0.394)	13 (0.512)	17 (11/16")
1/4" NPT	14 (0.551)	6 (0.236)	22 (7/8")

Dimensions in mm (inches)			
E	F	G	H (Hex.)
1/8" BSP	5 (0.197)	15 (0.591)	14 (9/16")
1/4" BSP	7 (0.276)	20 (0.787)	17 (11/16")
3/8" BSP	6 (0.236)	20 (0.787)	22 (7/8")
1/2" BSP	18 (0.707)	23 (0.906)	24 (15/16")


#### Specification notes:

1. IP 67 protection is given when the connector is locked. For proper function the gage port is vented to the atmosphere through the connector/cable assembly. Thus the cable end must have access to the ambient pressure.
2. The minimum supply voltage is directly proportional to the load resistance seen by the transmitter. For more details see the load limitation diagram.
3. Proof pressure is the maximum pressure which may be applied without causing damage to the sensing element.
4. Thermal effects are relative to 25 °C. Signal is clamped at 0 V.
5. Non-linearity refers to **Best Straight Line** fit. Hysteresis is the maximum output difference at any point within the operating pressure range for increasing and decreasing pressure.
6. Long term stability is the change in output after one year.
7. Span is the arithmetic difference in transmitter output signal measured at zero pressure and the maximum operating pressure.
8. Surge immunity according to EN 61000-4-5 on request for current output devices.
9. When using devices with optional nickel plated fittings, consider the media compatibility of the fittings also.
10. Available for pressure ranges from 1 bar (15 psi) absolute upwards only.
11. CE-labelling is in accordance with 2004/108/EC.
12. The pressure transmitters must not be used as safety accessories according to article 1, 2.1.3 of the directive 97/23/EC.

# CTE8000 / CTU8000 Series

## OEM pressure transmitters for industrial media

### ORDERING INFORMATION

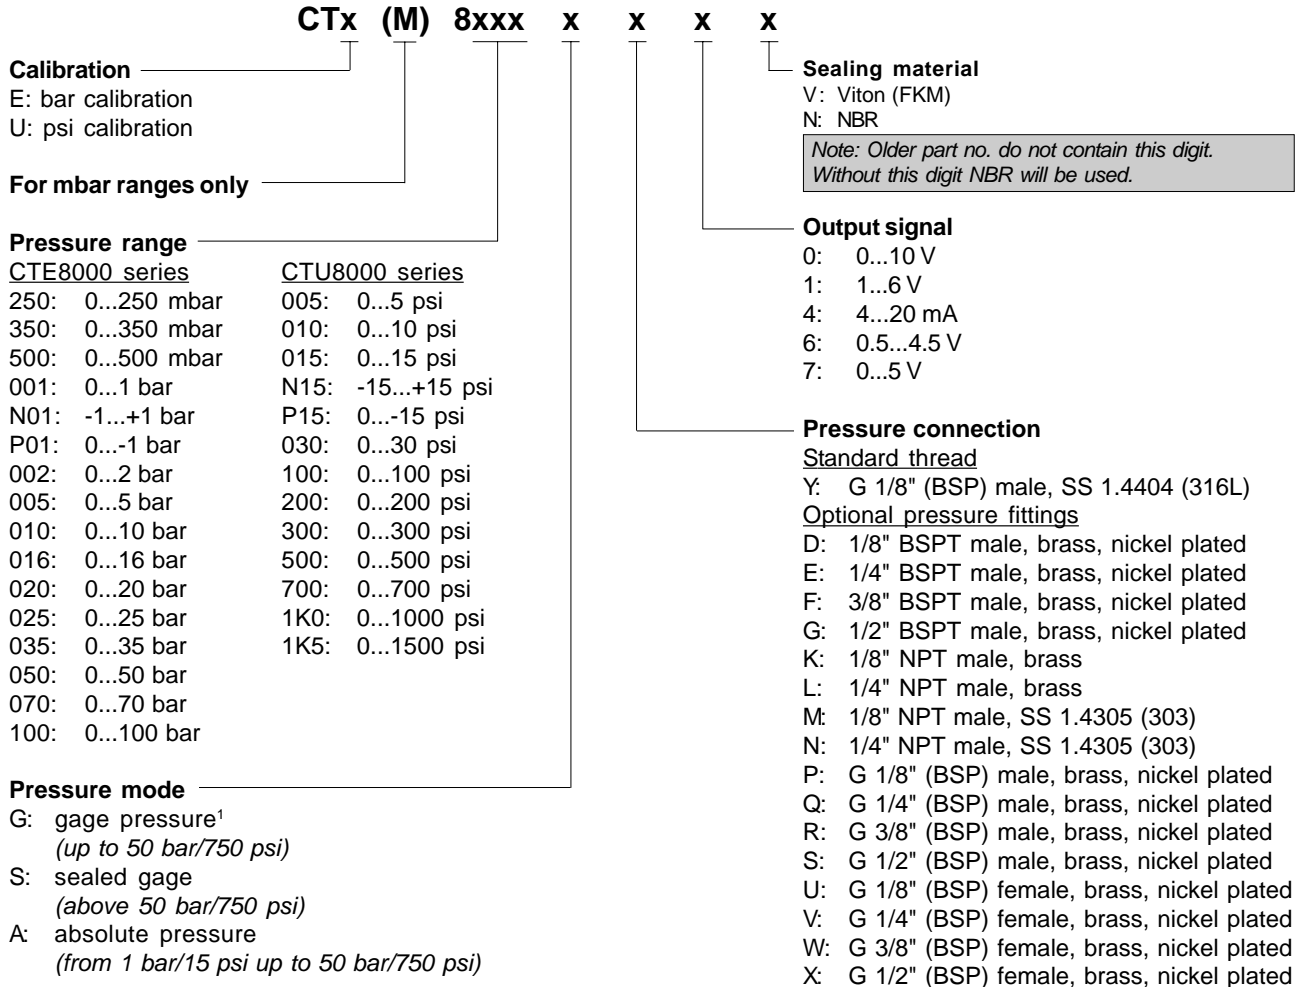

**Other pressure ranges and options are widely available. Please contact First Sensor.**

First Sensor reserves the right to make changes to any products herein. First Sensor does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.