


Parameter	Specification
Dimensions	16x 4mm
Impedance	16Ω ± 15%
Input Power	0.5W/0.8W
Lowest Resonant Frequency, F ₀	800Hz ± 20%
Sensitivity @ 0.3W/0.5m	79 ± 3 dB
Effective Frequency Range	F ₀ to 15.0 kHz
Total Harmonic Distortion	Max 15%

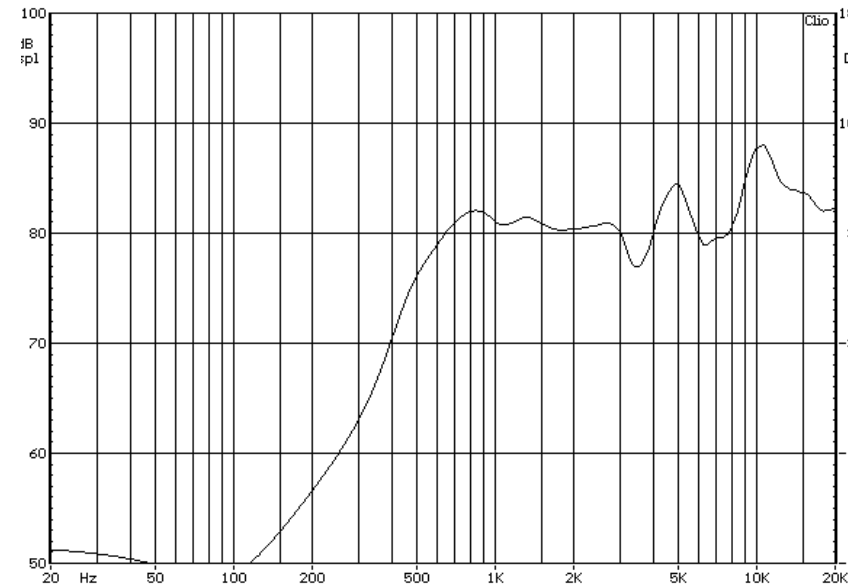

Specifications subject to change

Part No. U0016016NM17BAR rev1.0

16 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

