
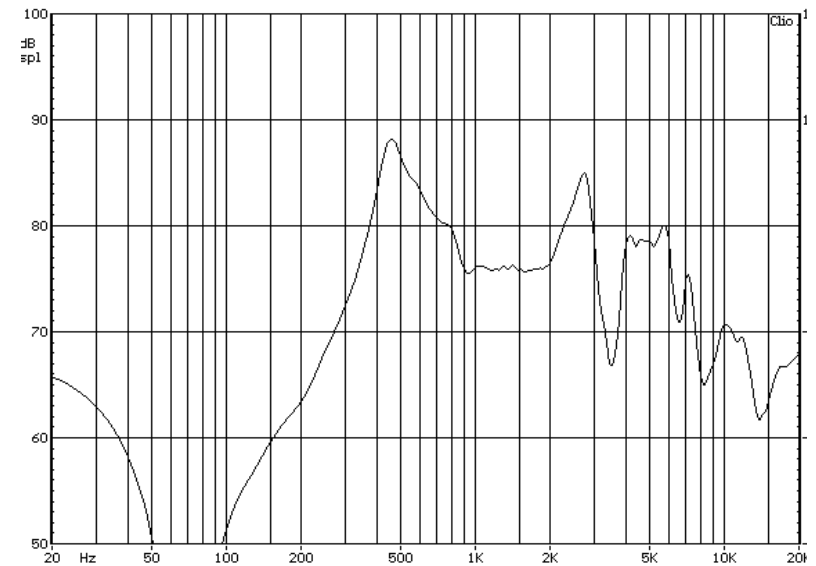


Parameter	Specification
Dimensions	28x 5mm
Impedance	$16\Omega \pm 15\%$
Input Power	0.2W/0.4W
Lowest Resonant Frequency, F_0	$450\text{Hz} \pm 20\%$
Sensitivity @ 0.25W/0.5m	79 ± 3 dB
Effective Frequency Range	F_0 to 6.0 kHz
Total Harmonic Distortion	< 5%

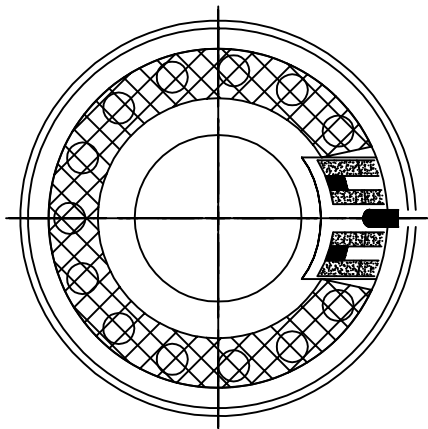

Specifications subject to change

Part No. U0028016NM12BBR rev0.0

28 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

