
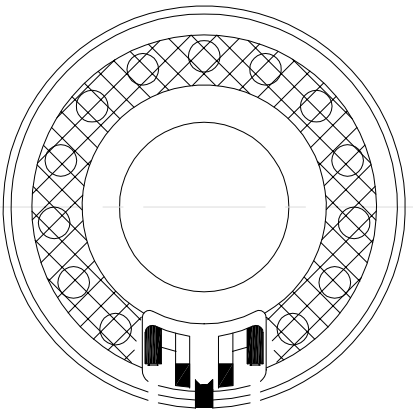


Parameter	Specification
Dimensions	28 x 5mm
Impedance	4Ω ±15%
Input Power	0.2W/0.3W
Lowest Resonant Frequency, F ₀	750Hz ± 20%
Sensitivity @0.25W/0.5m	84 ± 3 dB
Effective Frequency Range	F ₀ to 5.0 KHz
Total Harmonic Distortion	< 5%

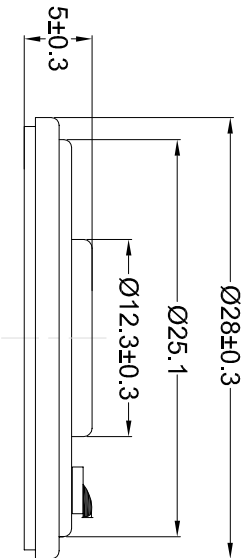

Part No. U0028004NMC04A

28 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

