


Parameter	Specification
Dimensions	28x 5.3mm
Impedance	$8\Omega \pm 15\%$
Input Power	0.3W/0.5W
Lowest Resonant Frequency, F_0	650Hz $\pm 20\%$
Sensitivity @ 0.25W/0.5m	81 ± 3 dB
Effective Frequency Range	F_0 to 5.0 KHz
Total Harmonic Distortion	< 5%

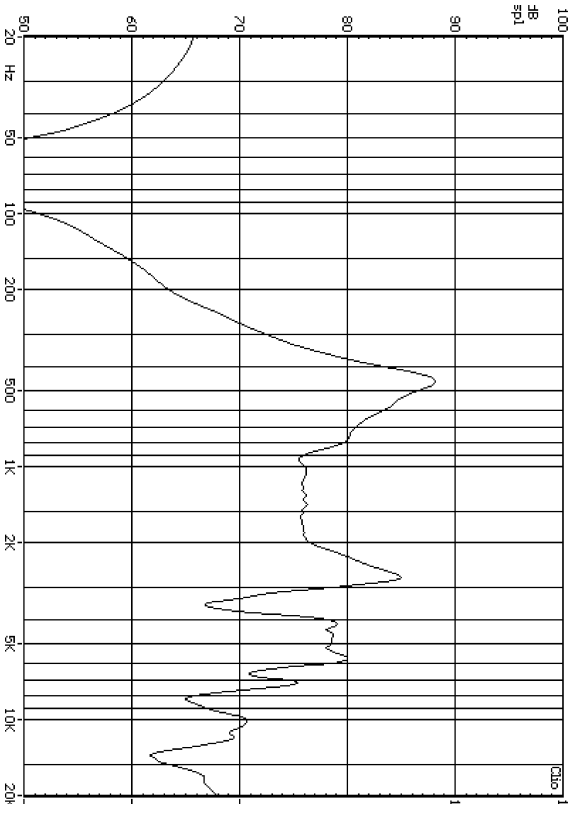

Part No. P0028008NM009A

28 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

