


Parameter	Specification
Dimensions	30x 5mm
Impedance	16Ω ± 15%
Input Power	0.5W/1.0W
Lowest Resonant Frequency, F ₀	550Hz ± 20%
Sensitivity @ 0.25W/0.5m	82 ± 3 dB
Effective Frequency Range	F ₀ to 4.5 KHz
Total Harmonic Distortion	< 5%

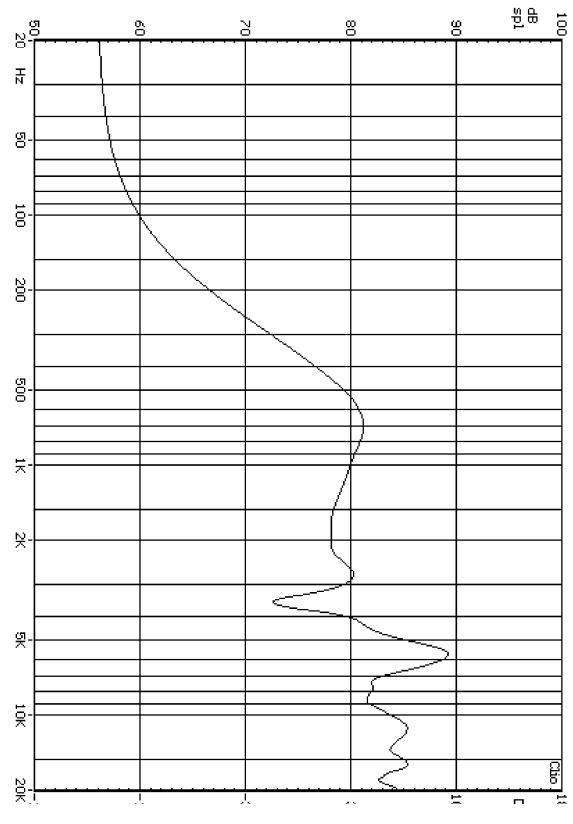

Part No. U0030016NM04AAR

30 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

