


Parameter	Specification
Dimensions	40x 17.5mm
Impedance	$4\Omega \pm 15\%$
Input Power	2W/3W
Lowest Resonant Frequency, $F_0$	$250\text{Hz} \pm 20\%$
Sensitivity @ 1W/0.5m	$84 \pm 3 \text{ dB}$
Effective Frequency Range	$F_0$ to 20.0 KHz
Total Harmonic Distortion	< 5%

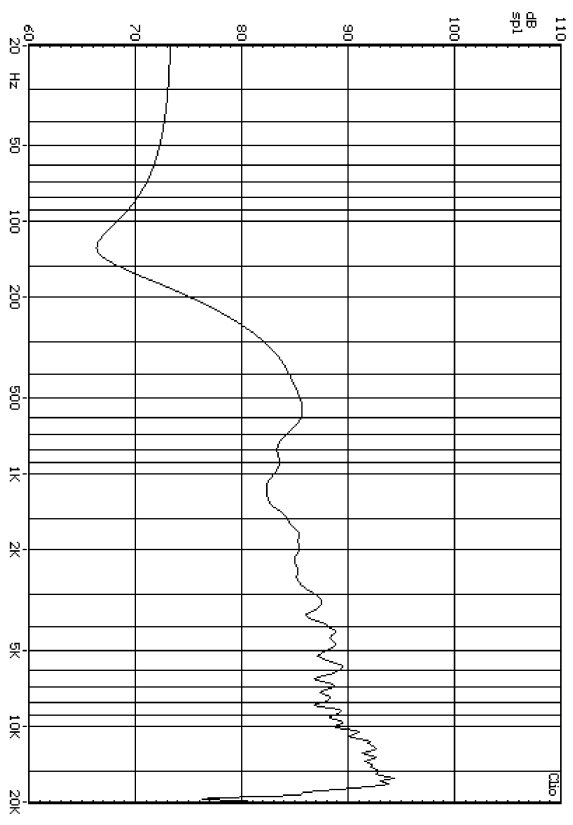

Part No. D0040004NNU10AAR

40 mm Speaker

Email: [speakers@stetron.com](mailto:speakers@stetron.com)

Web Site: [www.stetron.com](http://www.stetron.com)

