
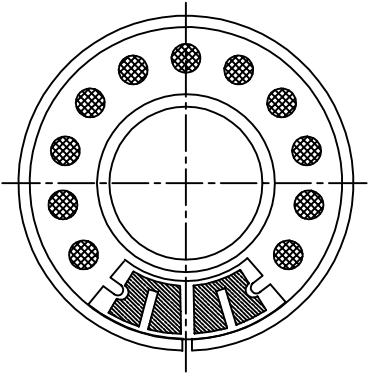


Parameter	Specification
Dimensions	40 x 6.3mm
Impedance	8Ω ± 15%
Input Power	1.0W/1.2W
Lowest Resonant Frequency, F <sub>0</sub>	450Hz ± 20%
Sensitivity @ 0.25W/0.5m	87 ± 3 dB
Effective Frequency Range	F <sub>0</sub> to 7.0 KHz
Total Harmonic Distortion	< 5%

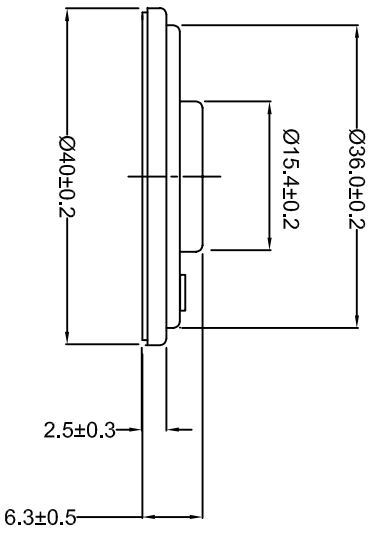

Part No. U0040008NM02AAR

40 mm Speaker

Email: [speakers@stetron.com](mailto:speakers@stetron.com)

Web Site: [www.stetron.com](http://www.stetron.com)

