


Parameter	Specification
Dimensions	40x 6.3mm
Impedance	16 $\Omega$ $\pm$ 15%
Input Power	1W/1.2W
Lowest Resonant Frequency, F <sub>0</sub>	450Hz $\pm$ 20%
Sensitivity @ 0.25W/0.5m	81 $\pm$ 3 dB
Effective Frequency Range	F <sub>0</sub> to 7.0 KHz
Total Harmonic Distortion	< 5%

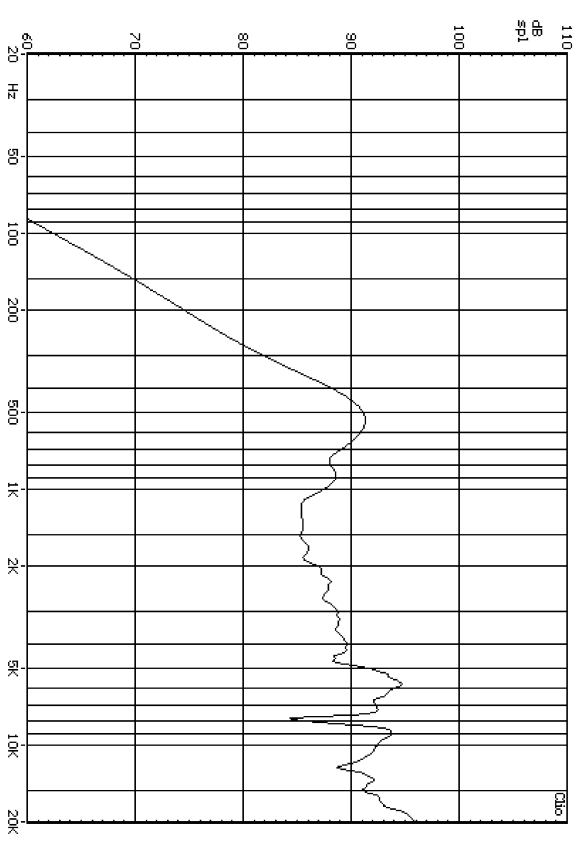

Part No. U0040016NM002AA

40 mm Speaker

Email: [speakers@stetron.com](mailto:speakers@stetron.com)

Web Site: [www.stetron.com](http://www.stetron.com)

