


Parameter	Specification
Dimensions	40 x 8.4mm
Impedance	$8\Omega \pm 15\%$
Input Power	1W/1.2W
Lowest Resonant Frequency, F_0	450Hz $\pm 20\%$
Sensitivity @ 0.25W/0.5m	84 ± 3 dB
Effective Frequency Range	F_0 to 7.0 KHz
Total Harmonic Distortion	< 5%

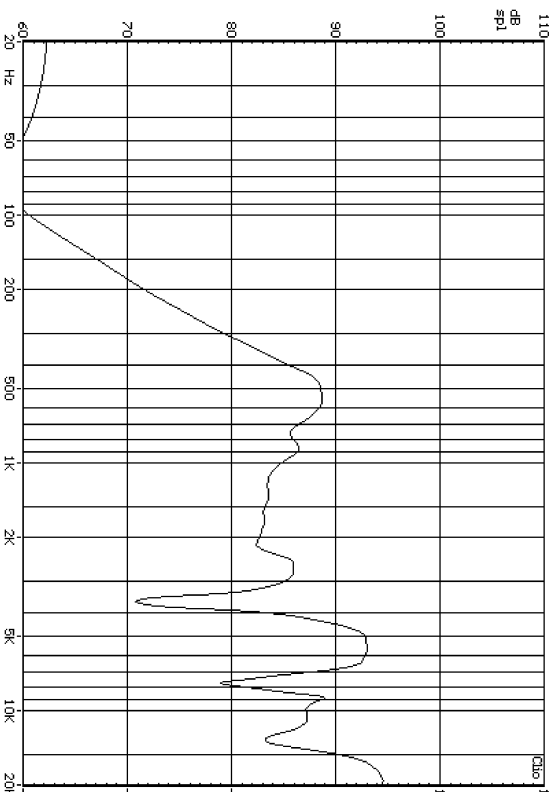

Part No. U0040008NM002AR

40 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

