


Parameter	Specification
Dimensions	50x 20mm
Impedance	50Ω ± 15%
Input Power	0.5W/1W
Lowest Resonant Frequency, F <sub>0</sub>	300Hz ± 20%
Sensitivity @ 0.05W/0.5m	76 ± 3 dB
Effective Frequency Range	F <sub>0</sub> to 10.0 KHz
Total Harmonic Distortion	< 5%

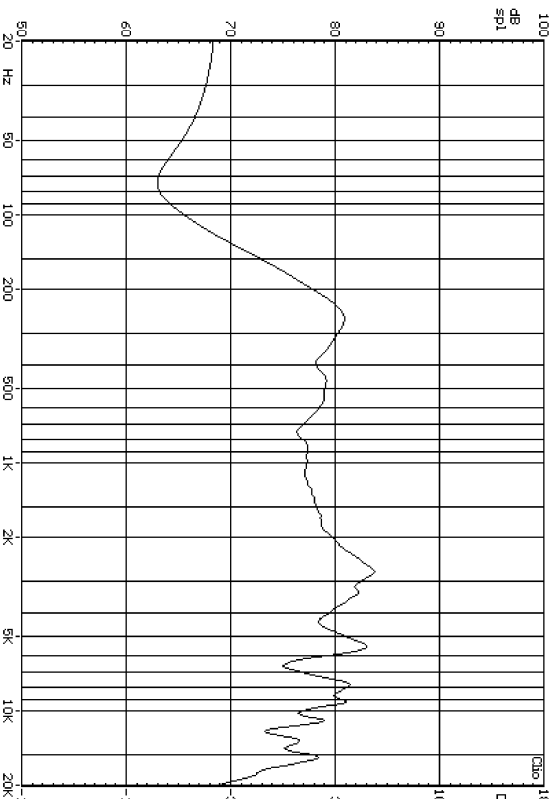

Part No. D0050050FM1122AR

50 mm Speaker

Email: [speakers@stetron.com](mailto:speakers@stetron.com)

Web Site: [www.stetron.com](http://www.stetron.com)

