


| Parameter | Specification |
|---|---------------------------|
| Dimensions | 50x 12.5mm |
| Impedance | 8Ω ± 15% |
| Input Power | 0.5W/1W |
| Lowest Resonant Frequency, F ₀ | 650Hz ± 20% |
| Sensitivity @ 0.25W/0.5m | 85 ± 3 dB |
| Effective Frequency Range | F ₀ to 4.0 KHz |
| Total Harmonic Distortion | < 5% |

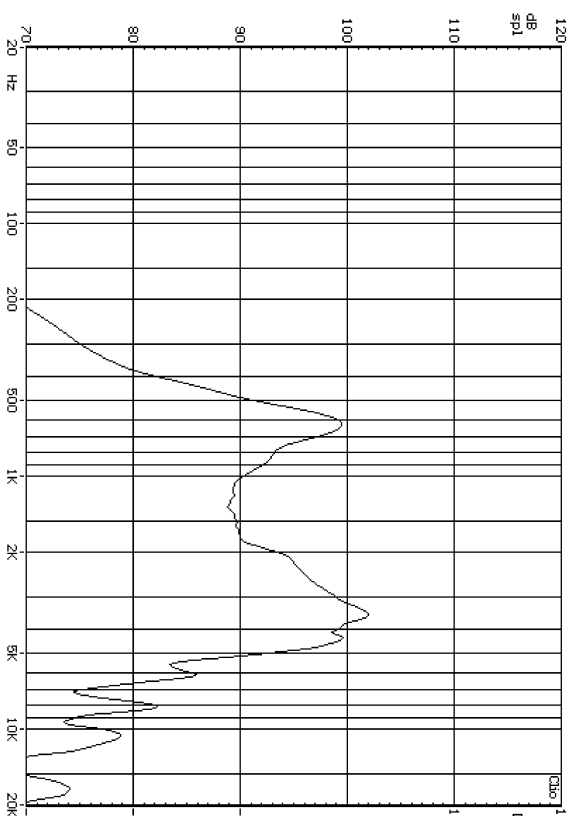

Part No. D0050008NMX14AR

50 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

