


Parameter	Specification
Dimensions	50x 20.5mm
Impedance	$8\Omega \pm 15\%$
Input Power	1.5W/2.0W
Lowest Resonant Frequency, F_0	190Hz $\pm 20\%$
Sensitivity @ 1W/0.5m	86 ± 3 dB
Effective Frequency Range	F_0 to 10.0 KHz
Total Harmonic Distortion	< 5%

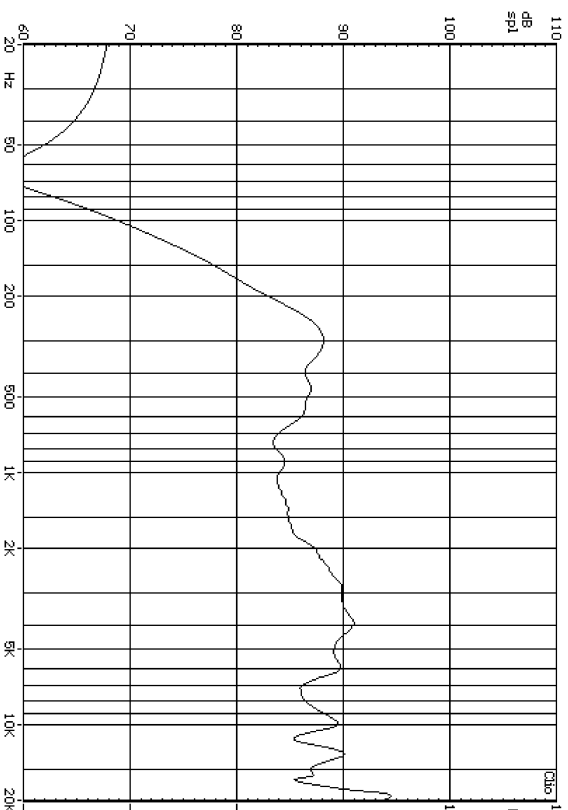

Part No. D0050008NU026AR

50 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

