



Parameter	Specification	Remarks
1. Dimensions	φ52mm	Outside Dimension of Radiating Plane
2. Impedance	4Ω ±15%	@1kHz/1.0V _{RMS}
3. Continuous/Peak Power Input	2.0W / 4.0W	
4. Lowest Resonant Frequency, F ₀	160Hz±20%	Constant Voltage (1.0V _{RMS})
5. Output SPL	87±3 dB	Measured at 1W/0.5m @ (0.4/0.5/0.6/0.8) kHz in IEC 268-5 Baffle
6. Qts	<1.5	Constant Voltage (1.0V _{RMS})
7. Effective Frequency Range	F ₀ to 12kHz	See Typical Frequency response
8. Total Harmonic Distortion	<2% (500 Hz – 7kHz)	2.0W/0.5m
9. Polarity	When a positive DC current is applied to the Terminal marked +, the diaphragm shall move forward	
10. Magnet	φ12.5 x 3.5mm	Nd-Fe-B (φD x h)

TESTS

1. Extraneous Noise	2.83V _{RMS} from F ₀ to 12kHz	No Buzzes or Rattles shall occur
2. Max. Input Power	1kHz Sine wave of 4.0W applied for 1 min.	All parameters must remain within specified limits
3. Drop Test	Speaker mounted in box dropped 18x from a height of 1m to a 5mm thick board	
4. Load Test	White Noise (2.0W) applied for 96h	Must meet items 5 – 8
5. High Temperature Test	+70±3 °C, 50%RH for 96h with 1h rest at room temperature	
6. Humidity Test	+40±3 °C, 90%RH for 96h with 1h rest at room temperature	

Typical Frequency Response

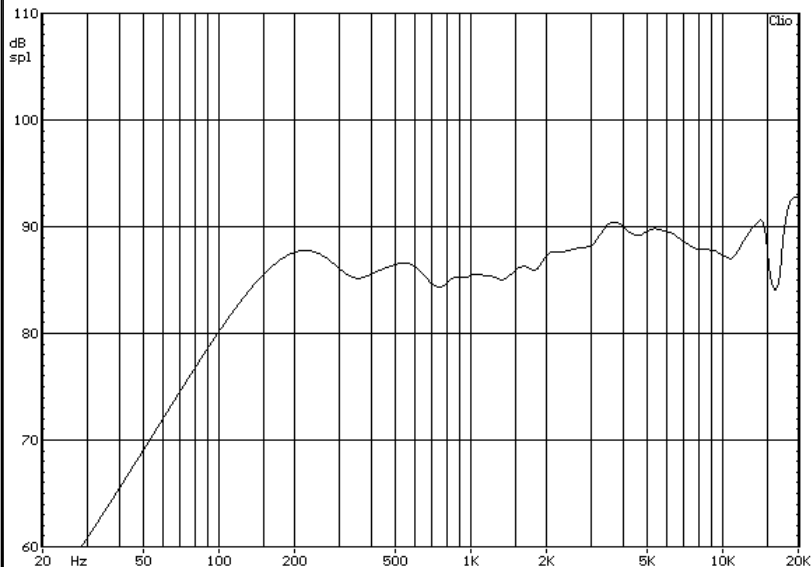

 Stetron International Inc.	Loudspeaker Specification	
	52mm/4Ω, Nd-Fe-B Magnet paper cone, RoHS compliant	
SIZE A	DRAWN BY	PART No. D0052004NU10HAR
SCALE N/A	DATE 19-May-09	SHEET 1 of 1
REV 0.1	DWG No. / FILE DB09-008	