


Parameter	Specification
Dimensions	100 x 52mm
Impedance	4Ω ± 15%
Input Power	40W/80W
Lowest Resonant Frequency, F <sub>0</sub>	60Hz ± 20%
Sensitivity @ 1W/0.5m	87 ± 3 dB
Effective Frequency Range	F <sub>0</sub> to 10.0 kHz
Total Harmonic Distortion	< 5%

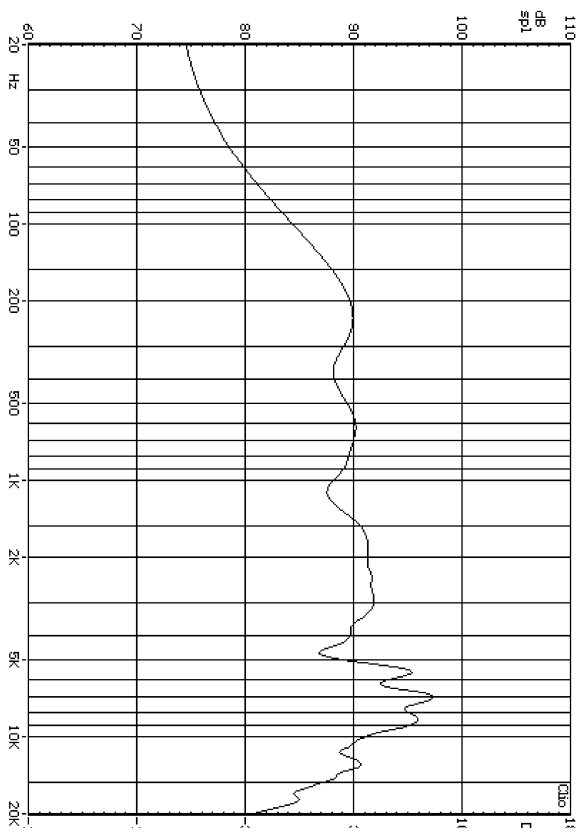

Part No. C0100004FUCIDA

100 mm Speaker

Email: [speakers@stetron.com](mailto:speakers@stetron.com)

Web Site: [www.stetron.com](http://www.stetron.com)

