


Parameter	Specification
Dimensions	50 X 90mm
Impedance	$4\Omega \pm 15\%$
Input Power	7 W / 10 W
Lowest Resonant Frequency, F_0	$220\text{Hz} \pm 20\%$
Sensitivity @ 1W/0.5m	88 ± 3 dB
Effective Frequency Range	F_0 to 20 kHz
Total Harmonic Distortion	< 5 %

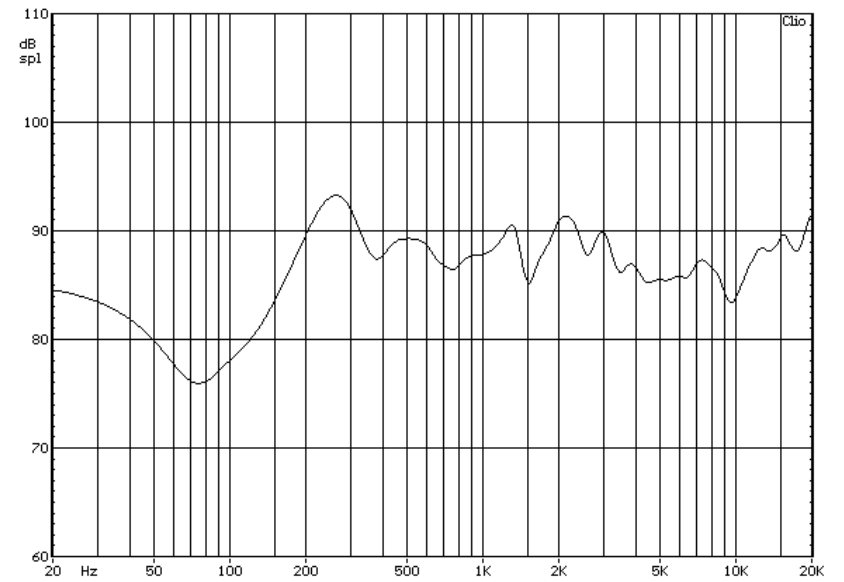

SPECIFICATIONS SUBJECT TO CHANGE

Part No. A5090004FC015AR REV. 0.0

50 X 90 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

