



Typical Frequency Response

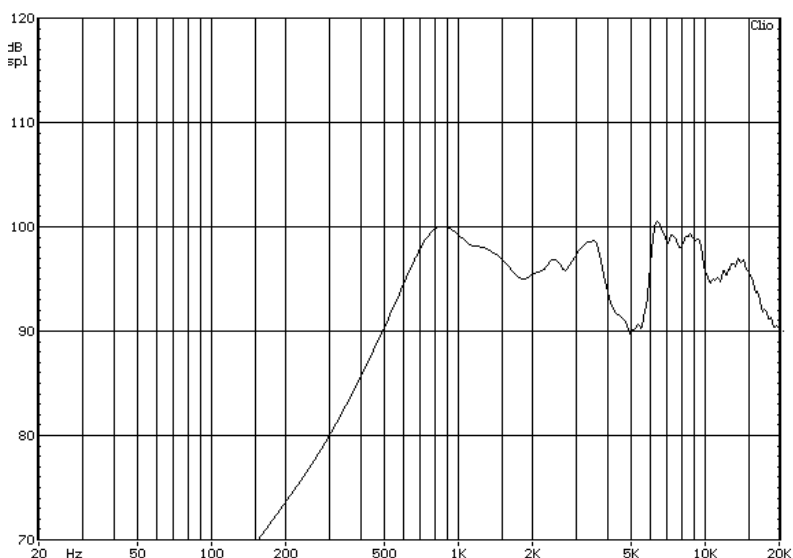

ITEM		SPECIFICATION	REMARKS
1	Dimensions	30.0 x 14.9 x 5.6mm	Length x Width x Height
2	Impedance	4.0Ω±15%	@ 2.0kHz/1V
3	Input Power	1W/1.5W	RMS/Peak
4	Lowest Resonant Frequency, F ₀	720Hz ±20%	Constant Voltage (1V RMS)
5	Output SPL	98dB ±3dB 84dB±3dB (1.0W/0.5m, for reference only)	Measured 1.0W/0.1m @ (0.8/0.1.0/1.2/1.5kHz) Avg. Using IEC 268-5 Baffle.
6	Total Harmonic Distortion	Max. 15% Max. 10% (for reference only)	@1W/0.1m/ 720Hz to 6kHz (0.1W/0.1m/720Hz to 6kHz)
7	Effective Frequency Range	F ₀ to 20kHz	See typical frequency response
8	Magnet Dimension	Φ7.7 x 1.8 mm	OD x H
TESTS			
9	Operation Test	White noise of 1W is applied for 96h.	The speaker must meet items 4 to 6 after test
10	Max. Input Power	The speaker shall be exposed to white noise of 1.5W for 1min.	
11	Buzz Test	2.0 Vrms applied from F ₀ to 20kHz	There shall be no extraneous noise
12	Polarity	A positive DC current is applied to the terminal marked +	The diaphragm shall move forward
13	Drop Test (in box)	Speakers properly packaged in their shipping carton are dropped on each side of the carton except the top from a height of 80cm (carton GW≤10kg) or 60cm (10kg<carton GW≤25kg)	There shall be no buzz/rattle and the part shall exhibit no physical damage (rivets, weld and glue must hold, no scratches or burrs on surfaces and no peeling of paint/coating)
14	Low Temperature Exposure	The speaker shall be exposed to -20 ±2°C, 50%RH for 96h with a 1h rest at room temperature.	The speaker must meet items 4 to 6 after test
15	High Temperature Exposure	The speaker shall be exposed to 70 ±3°C, 50%RH for 96h with a 1h rest at room temperature.	
16	Humidity Exposure	The speaker shall be exposed to 40±3°C, 90%RH for 96h with a 1h rest at room temperature.	

		Stetron International Inc.		LoudSpeaker Specification 30x14.9x5.6mm, 4.0Ω, Cloth cone, 1W, RoHS	
SIZE A		DRAWN BY		PART No. P3014004NC013AR	
SCALE N/A		DATE 30-June-09		SHEET 1	
REV 0.1		DWG No. / FILE DB09-011			