

2-Channel HDMI® Output Card for DM® Switchers

- > Modular output card for a DM-MD8X8, DM-MD16X16, or DM-MD32X32 switcher
- > Provides two independent HDMI® outputs
- > Handles video resolutions up to Full HD 1080p
- > Handles computer resolutions up to WUXGA
- > Handles 3D video and Deep Color
- > Handles Dolby® TrueHD, DTS-HD®, and uncompressed 7.1 linear PCM audio
- > HDCP compliant
- > Each output includes a balanced analog stereo audio output with volume control^[2]
- > Allows extraction of stereo 2-channel audio signals
- > Enables device control via CEC
- > Occupies a single output card slot

The DMC-HDO is an output card designed for use with any card-based Crestron® DigitalMedia™ Switcher. It provides two independent HDMI® outputs with complementary balanced analog stereo audio outputs. The HDMI outputs are each capable of handling video resolutions up to Full HD 1080p, as well as computer resolutions up to WUXGA. DVI signals are also supported using HDMI-to-DVI adapters or interface cables.^[1]

Each HDMI output on the DMC-HDO is accompanied by a balanced analog audio output, allowing stereo audio signals to be extracted from the digital stream and fed to a sound system. The output volume is adjustable via a control system using a keypad, touch screen, handheld remote, or mobile device.^[2]

DigitalMedia offers an alternative to conventional RS-232 and IR display control by harnessing the CEC (Consumer Electronics Control) signal embedded in HDMI. Through its connection to a control system (via the DM switcher), the DMC-HDO provides a gateway for controlling display devices right through their HDMI connections, potentially eliminating the need for any dedicated control wires or IR emitters.


To configure a DM switcher complete with input and output cards, cables, and other peripherals, please use the online [DigitalMedia Switcher Configuration Tool](#).

Please refer to the [DigitalMedia Resources Webpage at http://www.crestron.com/dmresources/](#) for additional design tools and reference documents.

SPECIFICATIONS

Video

Signal Types: HDMI®, DVI^[1]
Formats: HDMI w/Deep Color & 3D, HDCP content protection support
Resolutions, Progressive: 640x480@60Hz, 720x480@60Hz (480p), 720x576@50Hz (576p), 800x600@60Hz, 848x480@60Hz, 852x480@60Hz, 854x480@60Hz, 1024x768@60Hz, 1024x852@60Hz,

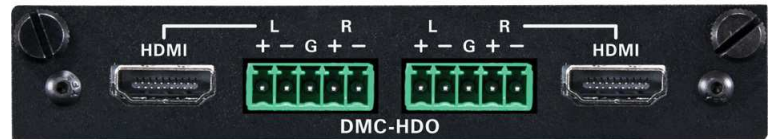

1024x1024@60Hz, 1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x768@60Hz, 1280x800@60Hz, 1280x960@60Hz, 1280x1024@60Hz, 1360x768@60Hz, 1365x1024@60Hz, 1366x768@60Hz, 1400x1050@60Hz, 1440x900@60Hz, 1600x900@60Hz, 1600x1200@60Hz, 1680x1050@60Hz, 1920x1080@24Hz (1080p24), 1920x1080@25Hz (1080p25), 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60), 1920x1200@60Hz, 2048x1080@24Hz, 2048x1152@60Hz, plus any other resolution allowed by HDMI up to 165MHz pixel clock

Resolutions, Interlaced: 720x480@30Hz (480i), 720x576@25Hz (576i), 1920x1080@25Hz (1080i25), 1920x1080@30Hz (1080i30), plus any other resolution allowed by HDMI up to 165MHz pixel clock

Audio

Signal Types: HDMI, Analog Stereo^[2]

Formats, Digital: Dolby Digital®, Dolby Digital EX, Dolby Digital Plus, Dolby® TrueHD, DTS®, DTS-ES, DTS 96/24, DTS-HD High Res, DTS-HD Master Audio™, up to 8ch PCM

Formats, Analog: Stereo 2-channel^[2]

Digital-To-Analog Conversion: 24-bit 48 kHz

Performance (analog): Frequency Response: 20Hz to 20kHz ±0.5 dB;
 S/N Ratio: >95 dB;
 THD+N: <0.005% @ 1kHz;
 Stereo Separation: >90 dB

Volume Gain Range (analog): -80dB to 0dB

Communications

HDMI: HDCP, EDID, CEC

Connectors

HDMI: (2) 19-pin Type A HDMI, female, comprising (2) HDMI digital video/audio outputs (DVI compatible^[1])

L, R: (2) 5-pin 3.5mm detachable terminal blocks comprising (2) balanced/unbalanced stereo line-level outputs^[2];
 Output Impedance: 200 Ohms balanced, 100 Ohms unbalanced;
 Maximum Output Level: 4 Vrms balanced, 2 Vrms unbalanced

DMC-HDO 2-Channel HDMI® Output Card for DM® Switchers

Construction

Plug-in card, occupies (1) DM switcher output card slot, includes metal faceplate w/black finish

Weight

6.2 oz (176 g)

MODELS & ACCESSORIES

Available Models

DMC-HDO: 2-Channel HDMI® Output Card for DM® Switchers

Available Accessories

CBL Series: Crestron® Certified Interface Cables

MP-WP Series: Media Presentation Wall Plates

MPI-WP Series: Media Presentation Wall Plates - International Version

Notes:

1. DVI is supported via either HDMI output using a suitable adapter or interface cable. [CBL-HD-DVI](#) interface cables are available separately.
2. The analog stereo audio outputs are only active when the selected input source is outputting a 2-channel stereo signal. For applications using multichannel surround sound sources, the DM switcher should be equipped with iDSPi type input cards, which can downmix the surround sound signals to stereo.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.

Crestron, the Crestron logo, DigitalMedia, and DM are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dolby and Dolby Digital are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS, DTS-HD, and DTS-HD Master Audio are either trademarks or registered trademarks of DTS, Inc. in the United States and/or other countries. HDMI is either a trademark or registered trademark of HDMI Licensing LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice.

©2014 Crestron Electronics, Inc.