

# DigitalMedia 8G™ Fiber Receiver & Room Controller 150

- > DigitalMedia 8G™ Fiber receiver, audio extractor, and display controller
- > Connects to a DM® switcher or transmitter over one multimode fiber strand<sup>[1]</sup>
- > Supports cable lengths up to 1000 ft (300 m) using CresFiber® 8G, or 500 ft (150 m) using other multimode fiber<sup>[1]</sup>
- > Provides one HDMI® or DVI display output<sup>[2]</sup>
- > Handles video resolutions up to Full HD 1080p
- > Handles computer resolutions up to WUXGA
- > Handles 3D video and Deep Color
- > Handles Dolby® TrueHD, DTS-HD®, and uncompressed 7.1 linear PCM audio
- > Provides a stereo analog line-level audio output with volume control<sup>[3]</sup>
- > Allows extraction of stereo 2-channel audio signals<sup>[3]</sup>
- > HDCP compliant
- > Provides a 10/100 Ethernet LAN connection
- > Enables device control via CEC, IR, RS-232, and Ethernet
- > Provides two relay control ports and one contact sensing input
- > Enables USB HID signal extension for a local keyboard/mouse
- > Compatible with Crestron USB over Ethernet Extenders<sup>[4]</sup>
- > Allows quick, easy setup and diagnostics
- > Low-profile surface mount design
- > Universal power pack included

The DM-RMC-150-S provides an enhanced one-box interface solution for a single display device as part of a complete Crestron® DigitalMedia™ system. It functions as a DM 8G® Fiber receiver and control interface, providing a single HDMI® output and an analog audio output, plus Ethernet, USB HID, and a variety of control ports. Its compact, low-profile design allows the DM-RMC-150-S to be installed discreetly behind a flat panel display or above a ceiling mounted projector. It connects to the head end or source location using a single multimode fiber strand.<sup>[1]</sup>

## DigitalMedia 8G™ Fiber

As the leader in HDMI and control system technologies, Crestron developed DigitalMedia (DM®) to deliver the first complete HD AV distribution system to take HDMI to a higher level. DigitalMedia allows virtually any mix of HDMI and other AV sources to be distributed throughout a home, office, school, or virtually any other facility. The latest generation of DM is called DigitalMedia 8G (DM 8G). Engineered for ultra high-bandwidth and ultimate scalability, DM 8G provides a true one-wire lossless transport for moving high-definition video, audio, Ethernet, and control signals over a choice of low-cost twisted pair or fiber optic cable.

DM 8G Fiber uses multimode fiber to enable signal distribution between buildings and over lengthy wire runs. DM 8G Fiber handles uncompressed Full HD 1080p video signals with support for 3D, Deep Color, and HDCP, as well as computer signals up to WUXGA. Audio capabilities include support for high-bitrate 7.1 audio formats like Dolby® TrueHD and DTS-HD Master Audio™ as well as uncompressed linear PCM. All signals are transported



over one strand of multimode fiber, supporting distances up to 1000 feet (300 m) using CresFiber® 8G, or 500 feet (150 m) using other multimode fiber optic cable.<sup>[1]</sup>

## Multimedia Display Interface

A single HDMI digital AV output port is provided on the DM-RMC-150-S for connection to a display or other device. The HDMI output can also handle DVI signals using an appropriate adapter or interface cable<sup>[2]</sup>.

A single fiber strand connects the DM-RMC-150-S to a DM switcher or transmitter, transporting video, audio, control, and networking signals all through one simple SC type optical connection.<sup>[1]</sup> Multiple DM-RMC-150-Ss may be installed to handle each display in a multiroom distribution system, all fed from a central DM-MD series switcher. Or, a single DM-RMC-150-S can be fed straight from a DM 8G Fiber transmitter, affording a simple solution for extending a computer or AV signal to a single display.

## Audio Extracting


The DM-RMC-150-S is equipped with an analog audio output, allowing stereo audio signals to be extracted from the digital stream and fed to a pair of speakers or a local sound system. The output volume is adjustable via a control system using a keypad, touch screen, handheld remote, or mobile device.<sup>[3]</sup>

## LAN Connectivity

Along with high-definition AV and control, DigitalMedia also integrates high-speed Ethernet networking for a total signal distribution solution. The DM-RMC-150-S includes a 10/100 Ethernet port, providing a convenient LAN connection for a local network device.

## USB Extender

Via its USB HID port, the DM-RMC-150-S functions as a keyboard/mouse extender, allowing a USB HID-compliant keyboard and/or mouse to be connected at the display location and used to control a computer or other component located at the central equipment rack or some other location. Expanded USB signal routing capability is available using Crestron USB over Ethernet Extenders<sup>[4]</sup>.

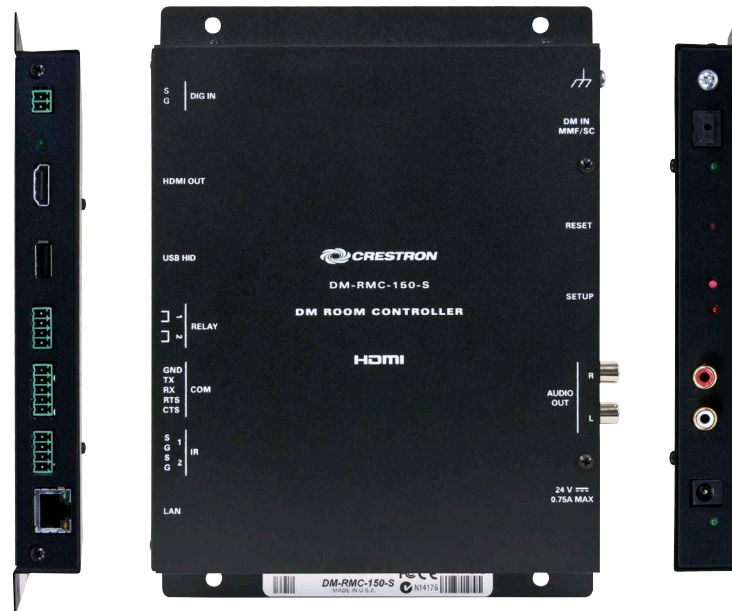

DM-RMC-150-S – Left, Front, and Right Views

### Embedded Device Control

The primary objective of every Crestron system is to enable precisely the control desired for a seamless user experience. The DM-RMC-150-S includes built-in RS-232, IR, and Ethernet control ports to allow programmable control of the display device connected to it. But, it can also provide an alternative to such conventional control methods by harnessing the CEC (Consumer Electronics Control) signal embedded in HDMI. Through its connection to the control system, the DM-RMC-150-S provides a gateway for controlling the display device right through the HDMI connection, potentially eliminating the need for any dedicated control wires or IR emitters.

Two low-voltage relay ports are also included on the DM-RMC-150-S for control of a projection screen or lift. In addition, there is a single digital input port to accommodate a room occupancy sensor, power sensor, or contact closure for enhanced automation and monitoring.

### Low-Profile Installation

The DM-RMC-150-S mounts conveniently to a wall, ceiling, or other flat surface. At just one inch deep, it fits easily behind a flat panel display or above a ceiling-mounted projector. All connections and LED indicators are positioned on the sides, ensuring optimal access and visibility for a clean, serviceable installation. An array of indicators is provided for easy setup and troubleshooting.

Please refer to the DigitalMedia Resources Webpage at <http://www.crestron.com/dmresources/> for additional design tools and reference documents.

## SPECIFICATIONS

### Video

**Input Signal Type:** DM 8G® Fiber (DigitalMedia™ over one multimode fiber optic strand)<sup>[1]</sup>

**Output Signal Types:** HDMI®, DVI<sup>[2]</sup>

**Formats:** DM 8G Fiber & HDMI w/Deep Color & 3D, DVI, HDCP content protection support

**Input Resolutions, Progressive:** 640x480@60Hz, 720x480@60Hz (480p), 720x576@50Hz (576p), 800x600@60Hz, 848x480@60Hz, 852x480@60Hz, 854x480@60Hz, 1024x768@60Hz, 1024x852@60Hz, 1024x1024@60Hz, 1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x768@60Hz, 1280x800@60Hz, 1280x960@60Hz, 1280x1024@60Hz, 1360x768@60Hz, 1365x1024@60Hz, 1366x768@60Hz, 1400x1050@60Hz, 1440x900@60Hz, 1600x900@60Hz, 1600x1200@60Hz, 1680x1050@60Hz, 1920x1080@24Hz (1080p24), 1920x1080@25Hz (1080p25), 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60), 1920x1200@60Hz, 2048x1080@24Hz, 2048x1152@60Hz, plus any other resolution allowed by HDMI up to 165MHz pixel clock

**Input Resolutions, Interlaced:** 720x480@30Hz (480i), 720x576@25Hz (576i), 1920x1080@25Hz (1080i25), 1920x1080@30Hz (1080i30), plus any other resolution allowed by HDMI up to 165MHz pixel clock

**Output Resolutions:** Matched to input

### Audio

**Input Signal Type:** DM 8G Fiber

**Output Signal Types:** HDMI, analog stereo<sup>[3]</sup>

**Formats, HDMI:** Dolby Digital®, Dolby Digital EX, Dolby Digital Plus, Dolby® TrueHD, DTS®, DTS-ES, DTS 96/24, DTS-HD High Res, DTS-HD Master Audio™, up to 8ch PCM

**Formats, Analog:** Stereo 2-Channel<sup>[3]</sup>

**Digital-To-Analog Conversion:** 24-bit 48 kHz

**Performance (analog):** Frequency Response: 20Hz to 20kHz  $\pm 0.5$ dB;  
S/N Ratio: >95dB 20Hz to 20kHz A-weighted;  
THD+N: <0.005% @ 1kHz;  
Stereo Separation: >90dB

**Volume Gain Range (analog):** -80dB to 0dB

## Communications

---

**Ethernet:** 10/100 Mbps, auto-switching, auto-negotiating, auto-discovery, full/half duplex, DHCP

**USB:** Supports signal extension of USB HID class devices, expandable to support virtually any USB 1.1 or 2.0 device using Crestron USB-EXT-DM USB over Ethernet Extenders<sup>[4]</sup>

**RS-232:** 2-way device control and monitoring up to 115.2k baud with hardware and software handshaking

**IR/Serial:** 1-way device control via infrared up to 1.1 MHz or serial TTL/RS-232 (0-5 Volts) up to 19.2k baud

**DigitalMedia:** DM 8G Fiber, HDCP, EDID, CEC, Ethernet

**HDMI:** HDCP, EDID, CEC

**NOTE:** Supports management of HDCP and EDID; supports pass-through and management of CEC between HDMI source and sink, or between HDMI sink and a control system

## Connectors

---

**DIG IN:** (1) 2-pin 3.5mm detachable terminal block;  
Digital/contact closure sensing input;  
Rated for 0-24 Volts DC, referenced to GND;  
Input Impedance: 2.2k Ohms pulled up to 5 Volts DC;  
Logic Threshold: 2.5 Volts DC nominal with 1 Volt hysteresis band

**HDMI OUT:** (1) 19-pin Type A HDMI female;  
HDMI digital video/audio output;  
Also supports DVI<sup>[2]</sup>

**USB HID:** (1) USB Type A female;  
USB 2.0 host port for connection of a mouse/keyboard or other USB HID-compliant device

**RELAY 1 – 2:** (1) 4-pin 3.5mm detachable terminal block comprising (2) normally open, isolated relays;  
Rated 1 Amp, 30 Volts AC/DC;  
MOV arc suppression across contacts

**COM:** (1) 5-pin 3.5mm detachable terminal block, bidirectional RS-232 port;  
Up to 115.2k baud, hardware and software handshaking support

**IR 1 – 2:** (1) 4-pin 3.5mm detachable terminal block comprising (2) IR/Serial ports;  
IR output up to 1.1 MHz;  
1-way serial TTL/RS-232 (0-5 Volts) up to 19200 baud

**LAN:** (1) 8-wire RJ45 female, shielded;  
10Base-T/100Base-TX Ethernet port

**Ground:** (1) 6-32 screw, chassis ground lug

**DM IN MMF/SC:** (1) SC female optical fiber connector;  
DM 8G Fiber input;  
Connects to DM 8G Fiber output of a DM switcher, transmitter, or other DM device via CresFiber® 8G fiber optic cable<sup>[1]</sup>

**AUDIO OUT R, L:** (2) RCA female;  
Stereo unbalanced line-level audio output<sup>[3]</sup>;  
Output Level: 2 Vrms maximum;  
Output Impedance: 100 Ohms nominal

**24VDC 0.75A MAX:** (1) 2.1 x 5.5 mm DC power connector;  
24 Volt DC power input;  
PW-2407WU power pack included

## Controls & Indicators

---

**HDMI OUT:** (1) green LED, indicates video signal presence at the HDMI output

**LAN:** (2) LEDs, green LED indicates Ethernet link status, amber LED indicates Ethernet activity

**DM IN:** (1) green LED, indicates DM link status

**RESET:** (1) miniature recessed pushbutton, for hardware reset

**SETUP:** (1) red LED and (1) miniature recessed pushbutton, for Ethernet setup

**24VDC:** (1) green LED, indicates operating power supplied via local power pack

## Power Requirements

---

**Power Pack:** 0.75 Amps @ 24 Volts DC;  
100-240 Volts AC, 50/60 Hz power pack, model PW-2407WU included

## Environmental

---

**Temperature:** 32° to 104°F (0° to 40°C)  
**Humidity:** 10% to 90% RH (non-condensing)  
**Heat Dissipation:** 35 BTU/Hr

## Enclosure

---

**Chassis:** Metal, black finish, with (2) integral mounting flanges, vented top and bottom

**Mounting:** Freestanding, surface mount, or attach to a single rack rail

## Dimensions

---

**Height:** 8.49 in (216 mm)  
**Width:** 6.53 in (166 mm)  
**Depth:** 1.07 in (28 mm)

## Weight

---

24 oz (681 g)

# DM-RMC-150-S DigitalMedia 8G™ Fiber Receiver & Room Controller 150

## MODELS & ACCESSORIES

### Available Models

**DM-RMC-150-S:** DigitalMedia 8G™ Fiber Receiver & Room Controller 150

### Included Accessories

**PW-2407WU:** Wall Mount Power Pack 24VDC, 0.75A, Universal (Qty.1 included)

### Available Accessories

**CRESFIBER8G-NP:** CresFiber® 8G Multimode Fiber Optic Cable, 50/125 x4 breakout, non-plenum

**CRESFIBER8G-P:** CresFiber® 8G Multimode Fiber Optic Cable, 50/125 x4 breakout, plenum

**CRESFIBER-CONN-SC50UM-12:** CresFiber® Fiber Optic Cable Connector (AFL Telecommunications™), SC 50µm, 12-Pack

**CRESFIBER-TK:** CresFiber® Termination Kit (AFL Telecommunications™)

**CRESFIBER-SINGLE-SC-P:** CresFiber® Simplex Fiber Optic Cable Assembly, 50/125, SC, Plenum

**CRESFIBER-SINGLE-SC-ARMORED-P:** CresFiber® ARMORED Simplex Fiber Optic Cable Assembly, 50/125, SC, Armored, Plenum

**CRESFIBER-SINGLE-SC-CLEAR-NP:** CresFiber® CLEAR Simplex Fiber Optic Cable Assembly, 50/125, SC, Non-Plenum

**CBL Series:** Crestron® Certified Interface Cables

**MP-WP Series:** Media Presentation Wall Plates

**MPI-WP Series:** Media Presentation Wall Plates - International Version

**CNSP-XX:** Custom Serial Interface Cable

**IRP2:** IR Emitter Probe w/Terminal Block Connector

**USB-EXT-DM:** USB over Ethernet Extender with Routing

**MP-AMP30:** Media Presentation Audio Amplifier

**MP-AMP40:** Media Presentation Audio Amplifier, 70 or 100 Volt

### Notes:

1. The maximum cable length for DigitalMedia 8G Fiber (DM 8G Fiber) is 1000 ft (300 m) using Crestron [CRESFIBER8G](#) multimode fiber optic cable, or 500 ft (150 m) using Crestron [CRESFIBER](#), Crestron [CRESFIBER-SINGLE-SC](#), or third-party OM3 simplex multimode fiber optic cable. Refer to the [Crestron DigitalMedia Design Guide, Doc. #4546](#) for complete system design guidelines. All wire and cables are sold separately.
2. The HDMI output requires an appropriate adapter or interface cable to accommodate a DVI signal. [CBL-HD-DVI](#) interface cables are available separately.
3. The analog stereo audio output is only active when the DM-RMC-150-S is receiving a 2-channel stereo signal.
4. Compatible with Crestron [USB-EXT-DM-LOCAL](#) and [USB-EXT-DM-REMOTE](#) USB over Ethernet Extender modules, sold separately.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/salesreps](http://www.crestron.com/salesreps) or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: [patents.crestron.com](http://patents.crestron.com).

Crestron, the Crestron logo, CresFiber, DigitalMedia, DigitalMedia 8G, DM, and DM 8G are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dolby and Dolby Digital are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS, DTS-HD, and DTS-HD Master Audio are either trademarks or registered trademarks of DTS, Inc. in the United States and/or other countries. HDMI and the HDMI Logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice. ©2014 Crestron Electronics, Inc.

# DM-RMC-150-S DigitalMedia 8G™ Fiber Receiver & Room Controller 150

