





Optics

- Lamp options:
 - 3 x 24W T5
- Polycarbonate diffuser, with printed image (order separately)
- A selection of images are available to enhance and define the space
- Positively retained framed diffuser
- IP40

Body

- Steel body finished white
- For installation in exposed T, spring T or plasterboard ceilings



Order Codes

Life P (Body & Frame)

T5 3 x 24W

HF Gear

LFPH324BD

Printed Diffuser

Configuration C1 and sky image

i.e. LFPC1-PA

Alternative configurations:

Replace C1 with C2 – C6 depending on configuration required

Alternative images:


Replace PA with PB, PC or PD depending on picture required

e.g. To order C6 with Autumn you must order: 6 off LFPH324BD

1 off LFPC6-PB

Special configurations and images available on request

Typical Configurations

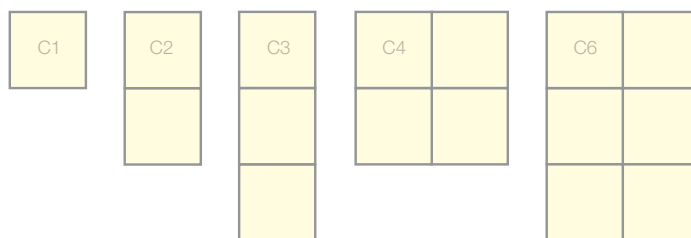

Lamp Performance

Wattage	IL@25°C	Lamp Life
1 x 24W T5	1750	24,000hrs

Ceiling Integration

Refer to common ceiling compatibility matrix – See page 404

Exposed T Grids

T15/T25 Pull up

Spring T Grids


SAS – 150/120
Armstrong – Orcal 1800/3000
Burgess – Clip in/Abar

Plasterboard

Prepared aperture
Cut out 578 x 578mm ±0.5

Printed Images

Sky



Autumn 1



Autumn 2



Blossom



Dimensions

L	W	H	L ₁	W ₁	KG
600	600	141	536	536	5.9

To Specify

Square recessed fluorescent luminaire system for feature lighting, with printed diffuser and steel body – as Whitecroft Lighting LIFE P