

- Uses ultrasonic detection technology
- Surface mounted directional detector
- 5, 10 or 15 minute time delay including 5 second walk test - selected via internal switches
- Switches up to 10A of lighting
- Sensitive to respond to very small movements
- Detects movement in rooms up to 10m x 10m and up to 15m range along a corridor - selected via internal switches
- Measures daylight penetration and holds off luminaires if adequate daylight is present
- Maximum recommended mounting height 5m
- Semi recessed mounting kit available



Order Codes


Directional Ultrasonic Detector

Surface Mounting


Semi Recessed Mounting Kit

COMRD
COMRDSFK

Dimensions



Detection Range

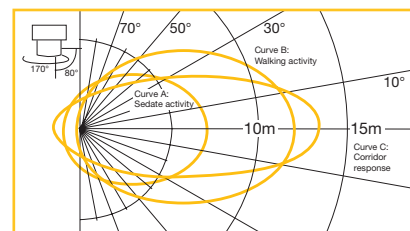

Detection Footprint at 2.4m Mounting Height