



BNC31201-L[*]V-[*]*R

*Options are:

W = White

M = Shielded metal case

**Ohms; Options are:





50, 75

ELECTRICAL:

- Impedance: 50 & 75 ohms
- Contact resistance: 3.0 milliohms maximum
- Insulation resistance: 5000 Megohms minimum
- Dielectric withstanding voltage: 1500 V_{RMS}

MATERIAL:

- Insulator: Polypropylene UL 94V-0
- Contacts: Phosphor bronze, Gold Flash
- Housing: PBT UL 94V-0 or Metal
- Operating Temperature: -55°C to +85°C

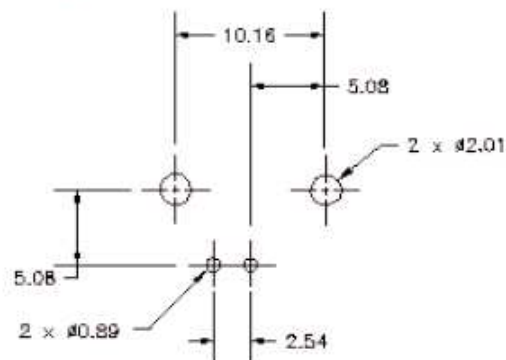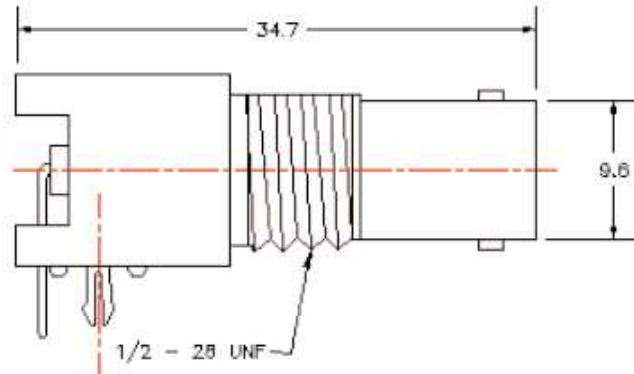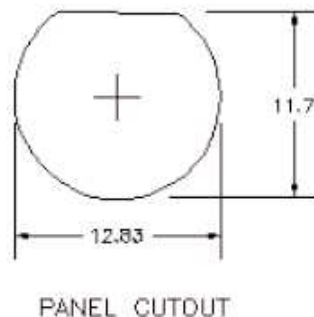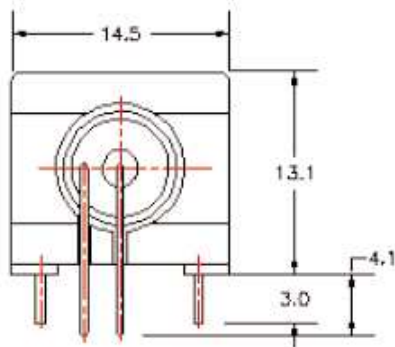

PCB LAYOUT TOP VIEW