




641D-BK

8 positions, 8 contacts (8P8C)
7" Wire leads with spade lugs



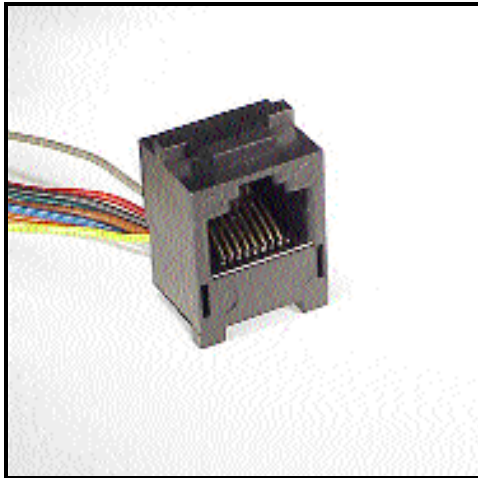


ELECTRICAL:

- Insulation resistance: 500 Megohms minimum
- Dielectric withstanding voltage: 1000 VAC
- Contact resistance: 30 milliohms maximum

MATERIALS:

- Insulator: UL94V-0 / PBT glass filled
- Contacts: Phosphor bronze
- Plating: 6μ" gold over nickel
- Color: Black
- Operating temperature: -55°C to +105°C

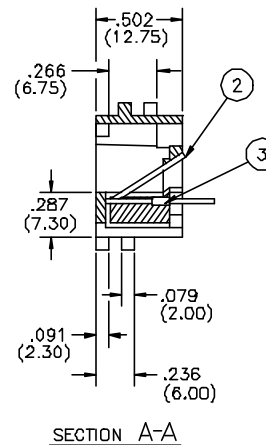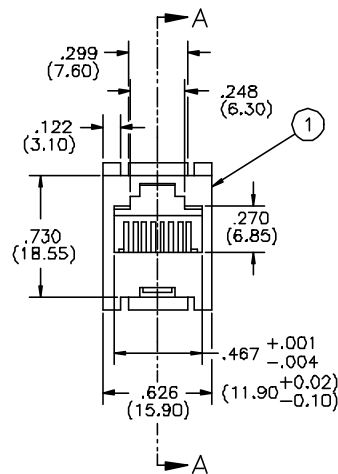

ITEM	DESCRIPTION	QTY	REMARKS
1	HOUSING	1	
2	GOLD WIRE	2-8	CG191-H
3	TERMINAL	2-8	
4	INSERT HOUSING	1	
5	LEAD WIRE	2-8	