


.100" Pitch Dual Row Sockets

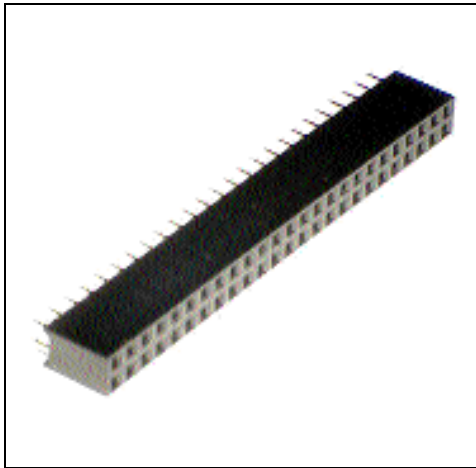

4063S-[*] Straight
4063R-[*] Right Angle

*Number of Contacts; Options are:
8 thru 80 Positions

FEATURES:

- Accepts .025" square contact parts
- Available up to 80 positions
- Mates with Regal #4070 series


ELECTRICAL:

- Current rating: 3 AMP maximum
- Contact resistance: 15 milliohms maximum
- Insulation resistance: 100 Megohms minimum
- Dielectric withstanding voltage: 500 VAC minimum

MATERIAL:


- Insulator: UL94V-0 / PBT glass filled
- Contacts: Phosphor bronze
- Plating: 6μ" gold over nickel
- Operating temperature: -55°C to 105°C
- Color: Black

Straight

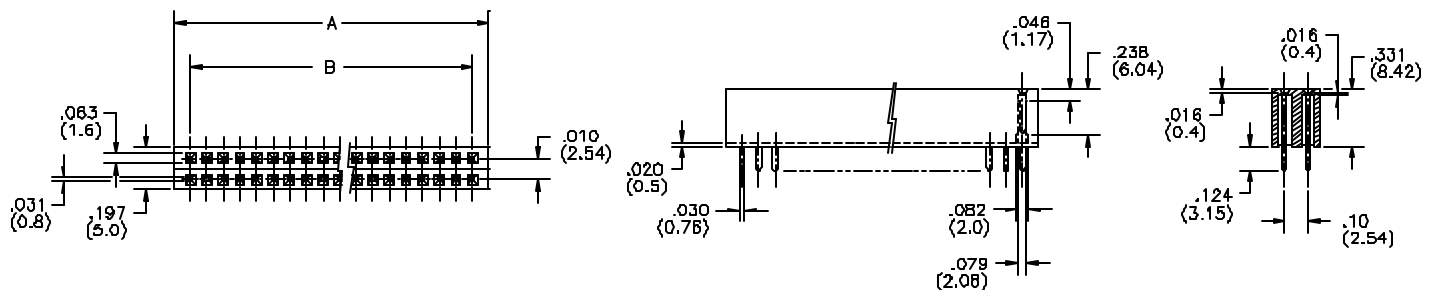

Right Angle

POSITION	8 THRU 80
DIMENSION	
A	$0.100(2.54) \times \text{NO. POSITIONS} \times 1/2 + 0.020(0.5)$
B	$0.100(2.54) \times \text{NO. POSITIONS} \times 1/2 - 0.100(2.54)$

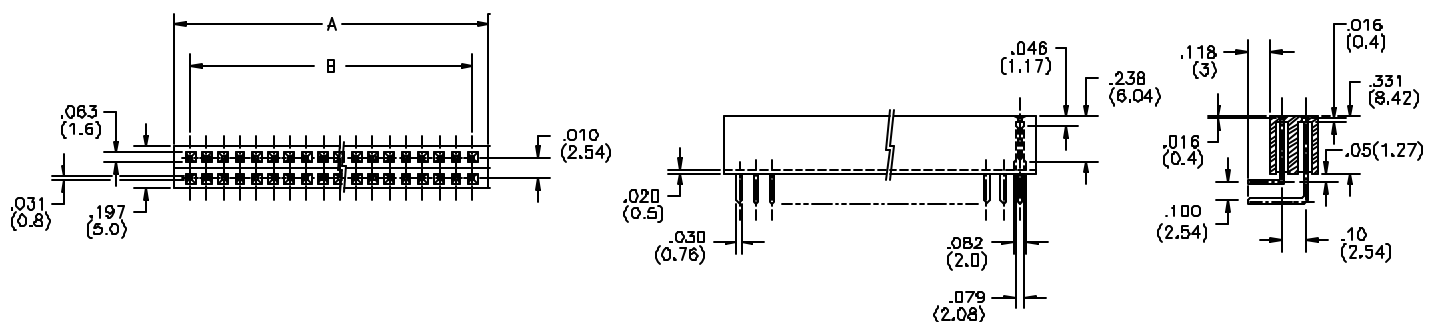

030722