


RoHS Compliant

REV	ECO NO.	DATE	BY	APP'D
A	PER ECO 001	6/06/11	KL	

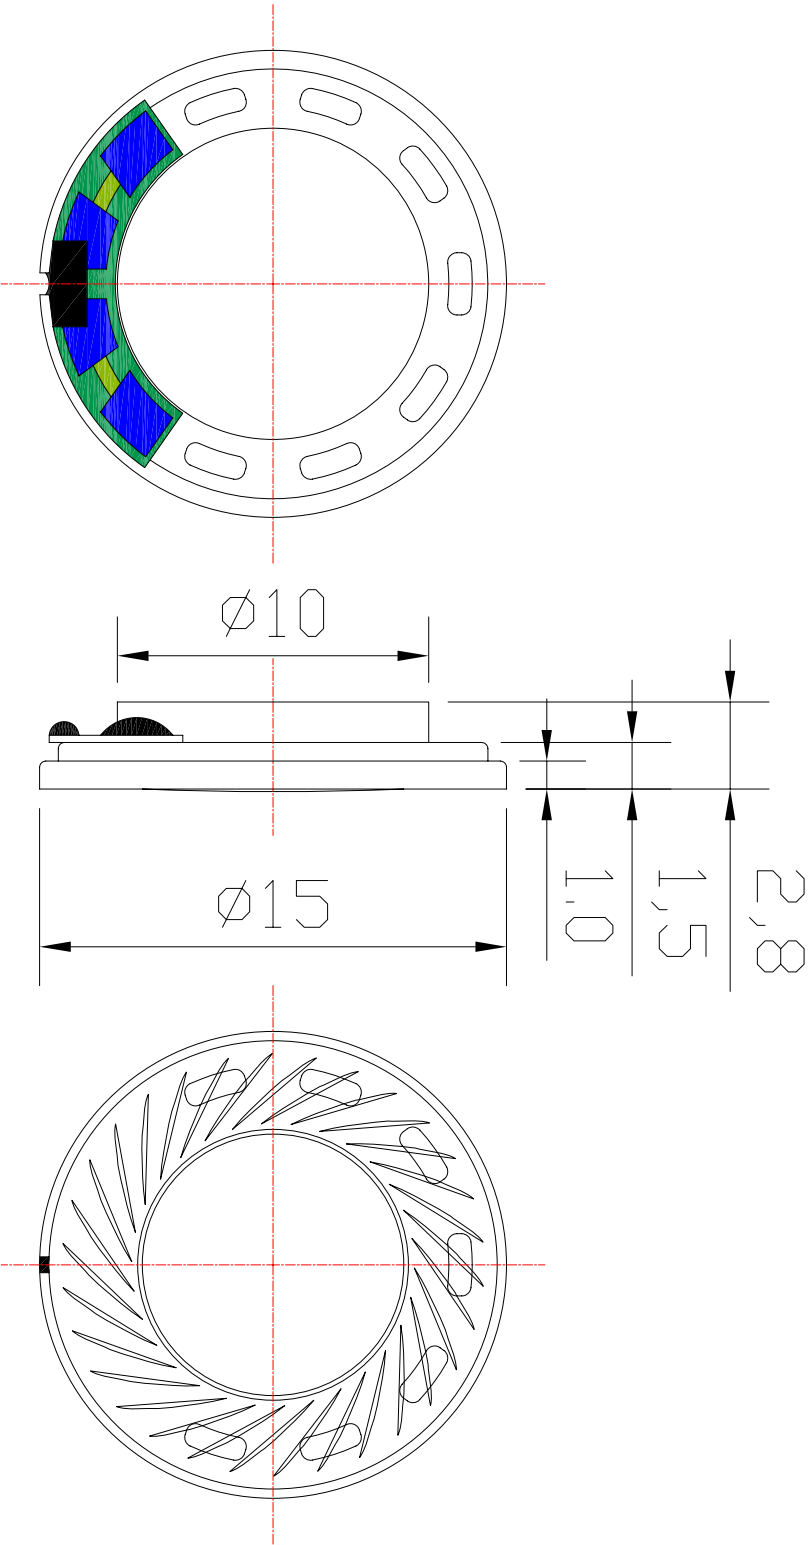

SPECIFICATIONS:

IMPEDANCE: 8 Ohms  $\pm 15\%$  at 2k  
SPL: 90  $\pm 3$ dB at 0.89V/RMS 10cm  
Fo: 1040Hz  $\pm 20\%$  at 0.894V  
FREQUENCY RANGE: 600Hz – 20KHz  
INPUT POWER: Nom. 0.3W  
Max.(Short Term): 0.5W  
WORKING TEMPERATURE:  $-20^{\circ}\text{C} \sim +50^{\circ}\text{C}$   
STORAGE TEMPERATURE:  $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$   
WEIGHT: Approx 1.4 gramm

CONFIDENTIAL

© Copyright 2011 Regal Electronics, Inc.  
This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN:	DATE	TITLE:
KIM	6/06/11	MICRO SPEAKER
CHECKED:	DATE	
ENGINEER:	DATE	
APPROVED:	DATE	
APPROVED:	DATE	
APPROVED:	DATE	
SCALE:	DRAWING NO.	REV
NONE	B RHL-15-EMNL	A

Tolerance:  $\pm 0.2\text{mm}$  UNIT: mm

**REGAL**  
ELECTRONICS INC.