

5

4

3


2

1

DWG NO. R-28-ENL

RoHS Compliant

| REV | ECO NO. | DATE | BY | APP'D |
|-----|----------------------------------|---------|----|-------|
| A | REL TO PRODUCTION PER ECO 001 | 1/29/09 | KL | |

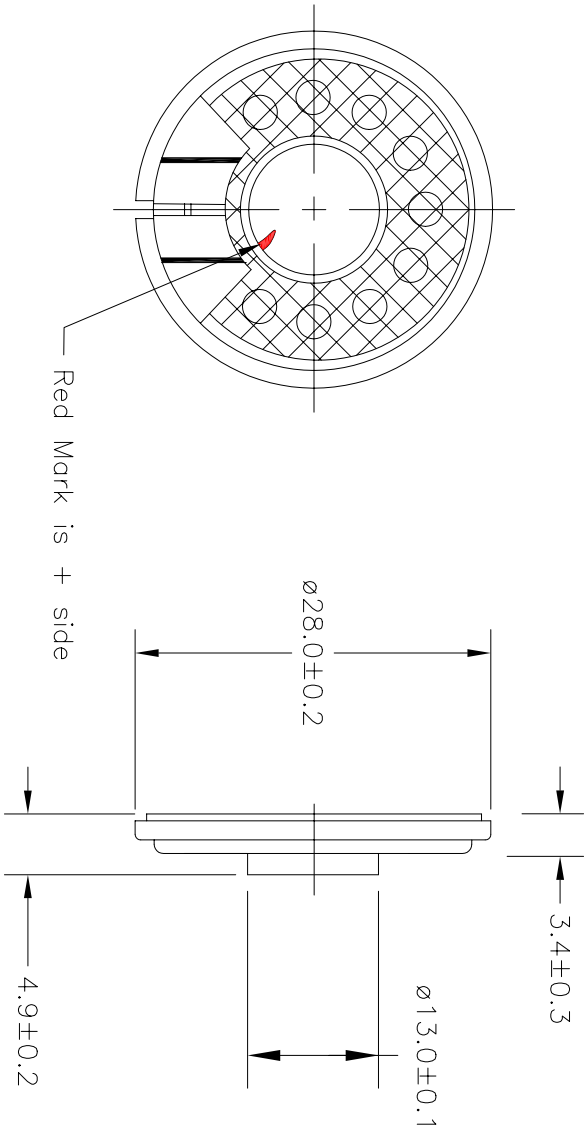

UNIT: mm

SPECIFICATIONS

Rated Input Power 0.2W Max. 0.25W
Impedance 8 Ohms \pm 15% at 1K Hz
Resonant Frequency(F_o) 660 Hz \pm 20% at F_o , 1V
Sensitivity(SPL) 81dB \pm 3dB at 1w, 1m
Frequency Range 280-18K Hz

CONFIDENTIAL

© Copyright 2006 Regal Electronics, Inc.
This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

| | | |
|-------------|----------------------|--------------------------|
| DRAWN: KIM | DATE 1/29/09 | TITLE: MINIATURE SPEAKER |
| CHECKED: | DATE | |
| ENGINEER: | DATE | |
| APPROVED: | DATE | |
| APPROVED: | DATE | |
| APPROVED: | DATE | |
| SIZE B | DRAWING NO. R-28-ENL | REV A |
| SCALE: NONE | SHEET 1 | OF 1 |