


#6184

Security Capacitors


CKT 501-4BDF 16-010 K

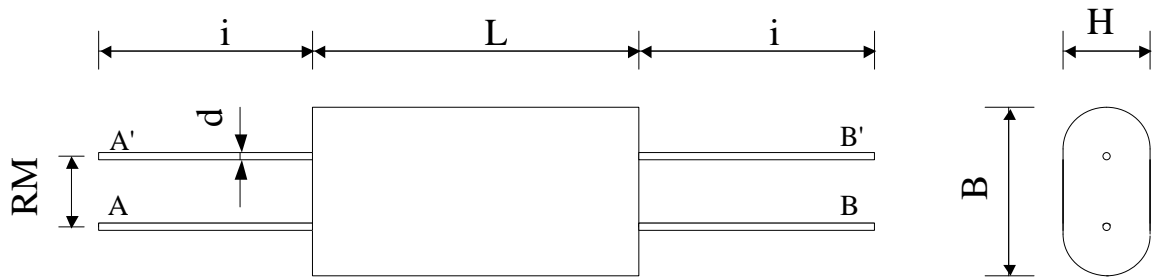

According to NFF 62-102

Dielectric of metallized polyester

Polyester wrapped UL510 / Epoxy resin sealing UL 94-V0



| Parameter | Symbol | | Value | Unit | Condition |
|--------------------------------|--------------|------|-----------------|---------------|-----------------|
| Capacitance | C | | 0.1 | μF | 1 V / 1 kHz |
| Tolerance | | | ± 10 | % | |
| Rated voltage | Un DC | | 160 | VDC | |
| Rated voltage | Un AC | | 100 | Veff | 50 Hz / 85°C |
| Tangente delta | tg δ | | ≤ 70 | 10^{-4} | 1 kHz |
| Insulation resistance | Ri | | $> 40'000$ | M Ω | 100 VDC - 1 min |
| Test voltage between terminals | U T1 | | 256 | VDC | 10 s |
| Operating temperature | | | - 55 / + 125 °C | | |
| | | | | | |
| | | | | | |
| Dimension | Symbol | | | Unit | Conditions |
| Width | B max | | 13 | mm | |
| Height | H max | | 10 | mm | |
| Length | L max | | 14 | mm | |
| | | | | | |
| Terminals | | | | | |
| Radial tinned wire | d | | 0.6 | mm | |
| RM | | | 5.08 ± 1.0 | mm | |
| Length | i | | > 25 mm | | |
| | | | | | |
| | M1 | | | | |
| | M0 | | | | |
| | Modification | Date | Visa émetteur | | |

Condensateurs CH 1401 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCHKE COMPANY

HJJ

24.05.2013

faisab6184.XLS